



**M+S HYDRAULIC**

# HYDRAULIC MOTORS

**MLHM  
MLHP  
MLHR  
MLHH**



**SAE version**

# SPOOL VALVE HYDRAULIC MOTORS

## CONTENTS

	Page
<input type="checkbox"/> Hydraulic Motors Series MLHM .....	4
<input type="checkbox"/> Hydraulic Motors Series MLHP .....	13
<input type="checkbox"/> Hydraulic Motors Series MLHR .....	33
<input type="checkbox"/> Hydraulic Motors Series MLHRFL .....	44
<input type="checkbox"/> Hydraulic Motors Series MLHPL .....	46
<input type="checkbox"/> Hydraulic Motors Series MLHRL .....	51
<input type="checkbox"/> Hydraulic Motors Series HP .....	55
<input type="checkbox"/> Hydraulic Motors Series HR .....	64
<input type="checkbox"/> Hydraulic Motors Series MLHRW .....	69
<input type="checkbox"/> Hydraulic Motors Series MLHH .....	78
<input type="checkbox"/> Hydraulic Motors Series HW .....	86
<input type="checkbox"/> Motor Special Features .....	110
<input type="checkbox"/> Motors with Speed Sensor .....	111
<input type="checkbox"/> Application Calculations .....	113

# SPOOL VALVE HYDRAULIC MOTORS

---

## GENERAL INFORMATION:

Orbit motors convert hydraulic energy (pressure, oil flow) into mechanical energy (torque, speed). Hydraulic orbit motors operate on the principle of an internal gear (rotor) rotating within a fixed external gear (stator). The internal gear transmits the torque generated by the application of pressure from hydraulic oil fed into motor which is then delivered via the motor's output shaft. Orbit motors have high starting torque and constant output torque at wide speed range.

## DISTRIBUTOR VALVE

MLHM, MLHP, MLHR, MLHH, MLHPL, MLHRL, HP, HR, MLHRW, HW series motors have spool valve: the distributor valve has been integrated with the output shaft. The cardan shaft rotates distributor valve and transfers mechanical energy from gerotor set to output shaft. The valve has hydrodynamic bearings and has infinite life when load ratings are not exceeded.

## GEARWHEEL SET

There are two forms of gearwheel set:

- Gerotor set has plain teeth. These types motors are suitable for long operating periods at moderate pressures or short operating periods at high pressures. MLHM, MLHP, MLHPL and HP series motors have gerotor set.

- Roll-gerotor set has teeth fitted with rollers. The rollers reduce local stress and the tangential reaction forces on the rotor reducing friction to a minimum. This gives long operating life and better efficiency even at continuous high pressures. Roll-gerotor sets are recommended for operation with thin oil and for applications with continually reversing loads. MLHR, MLHRL, HR, MLHH, MLHRW and HW series motors have roll-gerotor set.

## FEATURES:

---

**Standard Motor** The standard motor mounting flange is located as close to the output shaft as possible. This type of mounting supports the motor close to the shaft load. This mounting flange is also compatible with many standard gear boxes.

**Wheel Motor** W mounting flange makes the motors possible to fit a wheel hub or a winch drum so that the radial load acts closer to motor bearings. This gives the best utilization of the bearing capacity and is a very compact solution.

**Needle Bearing** MLHPN and MLHRN have an output shaft supported in needle bearing. These types motors are suitable for operating conditions such us frequent start and stops, vibration on the shaft, high static and dynamic radial loads in short operating terms.

**Low Leakage** LL Series hydraulic motors are designed to operate at the whole standard range of working conditions (pressure drop and frequency of rotation), but with considerable decreased volumetric losses in the drain ports. This motors are suitable for hydraulic systems with series-connected motors with demands for low leakage.

**Low Speed Valve** LSV feature optimizes the motor for low-speed performance. Motors with this valving provide very low speed while maintaining high torque. They are designed to run continuously at low speed (up to 200 RPM) at normal pressure drop and reduced flow. Optimal run is guaranteed at frequency of rotation from 20 to 50 RPM. Motors with this valving have an increased starting pressure and are not recommended for using at pressure drop less than 580 PSI [40 bar].

**Free Running** FR motors are with increased clearance at all friction parts, allowing the shaft to rotate more freely with less mechanical drag. The increased clearance also improves lubrication of the wear surfaces of gear set and friction parts. Additional advantages of "FR" version are prolonging of the life of the hydraulic motors at high speeds, as well as the possibility to use them in systems with wide variation of the loading. FR Series motors are designed to operate with high speed /over than 300 RPM/ and low pressure drop. Volumetric efficiency may be reduced slightly.

**High Pressure Shaft Seal** The high pressure shaft seals allow the motors to withstand high case pressures at high speeds without external drain line.



**Motors with Speed Sensor** Motors are available with integrated inductive speed sensor. The output signal is a standardized voltage signal that can be used to control the speed of a motor. The torque and the radial load of the motor are not affected by the installation of speed sensor.

# HYDRAULIC MOTORS MLHM



## CONTENTS


Specification data .....	5
Function diagrams .....	6÷8
Dimensions and mounting ...	9÷10
Shaft extensions .....	11
Permissible shaft loads .....	11
Order code .....	12





## APPLICATION

- » Conveyors
- » Textile machines
- » Mining machinery
- » Machine tools
- » Ventilators
- » Construction plant equipment and access platforms etc.

**Pressure Settings at Flow**  
Q=.53 GPM [2 lpm], 150 SUS [32 mm<sup>2</sup>/s], 122°F [50°C]

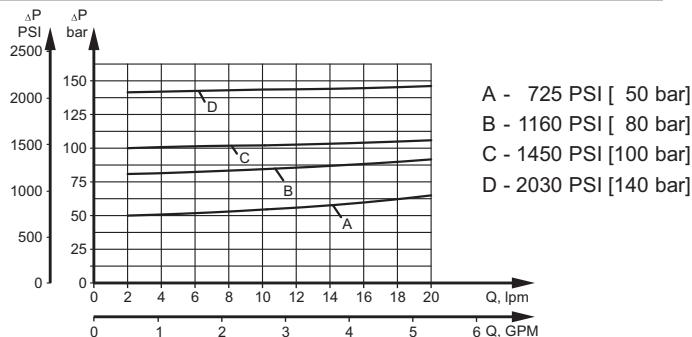

**MLHMP Series with Integrated Internal Crossover Relief Valve**  
A → B,  $\Delta p=1450$  or 725 PSI [100 or 50 bar]

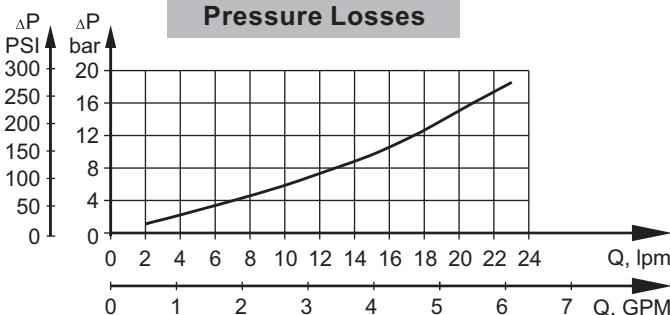

## GENERAL

<b>Max. Displacement,</b> in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	3.05 [50]
<b>Max. Speed,</b> [RPM]	2440
<b>Max. Torque,</b> lb-in [daNm]	cont.: 398 [4,5] int.: 513 [5,8]
<b>Max. Output,</b> HP [kW]	4,3 [3,2]
<b>Max. Pressure Drop,</b> PSI [bar]	cont.: 1500 [105] int.: 2030 [140]
<b>Max. Oil Flow,</b> GPM [lpm]	6.6 [25]
<b>Min. Speed,</b> [RPM]	20
<b>Pressure fluid</b>	Mineral based - HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °F [°C]	-40 ÷ 284 [-40 ÷ 140]
<b>Optimal Viscosity range, SUS [mm<sup>2</sup>/s]</b>	98 ÷ 347 [20 ÷ 75]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

## SPECIFICATION DATA

Type	MLHM 8	MLHM 12.5	MLHM 20	MLHM 32	MLHM 40	MLHM 50
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	.50 [8,2]	.77 [12,5]	1.22 [19,9]	1.93 [31,6]	39,8 [39,8]	3.08 [50]
<b>Max. Speed, [RPM]</b>	Cont.	1950	1550	1000	630	500
	Int.*	2450	1940	1250	800	630
<b>Max. Torque, lb-in [daNm]</b>	Cont.	95 [1,1]	140 [1,6]	220 [2,5]	350 [4,0]	400 [4,5]
	Int.*	135 [1,5]	200 [2,3]	310 [3,5]	500 [5,7]	620 [7,0]
	Peak**	187 [2,1]	293 [3,3]	453 [5,1]	568 [6,4]	725 [8,2]
<b>Max. Output, HP [kW]</b>	Cont.	2.4 [1,8]	3.2 [2,4]	3.2 [2,4]	3.2 [2,2]	2.4 [1,8]
	Int.*	3.5 [2,6]	4.3 [3,2]	4.3 [3,2]	4.3 [3,2]	4.3 [3,2]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont.	1450 [100]	1450 [100]	1450 [100]	1450 [100]	1310 [90]
	Int.*	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Peak**	2900 [200]	2900 [200]	2900 [200]	2320 [160]	2320 [160]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont.	4.2 [16]	5.3 [20]	5.3 [20]	5.3 [20]	5.3 [20]
	Int.*	5.3 [20]	6.6 [25]	6.6 [25]	6.6 [25]	6.6 [25]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, PSI [bar]</b>	Cont. 0-100 RPM	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Cont. 100-400 RPM	1500 [105]	1500 [105]	1500 [105]	1500 [105]	1500 [105]
	Cont. 400-800 RPM	725 [50]	725 [50]	725 [50]	725 [50]	725 [50]
	Cont. >800 RPM	290 [20]	290 [20]	290 [20]	-	-
<b>Max. Return Pressure with Drain Line, PSI [bar]</b>	Int.* 0-max. RPM	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
		60 [4]	60 [4]	60 [4]	60 [4]	60 [4]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max. press. drop Cont.	60 [0,7]	105 [1,2]	2,1 [185]	300 [3,4]	335 [3,8]
	At max. press. drop Int.*	90 [1,0]	150 [1,7]	2,9 [255]	425 [4,8]	550 [6,2]
<b>Min. Speed***, [RPM]</b>		50	40	30	30	25
<b>Weight, kg [lb]</b>	MLHM[M] rear ports	4.2 [1,9]	4.41 [2,0]	4.63 [2,1]	4.85 [2,2]	5.07 [2,3]
	MLHM[M]	4.41 [2,0]	4.63 [2,1]	4.85 [2,2]	5.07 [2,3]	5.29 [2,4]
	MLHM[M]...P	4.85 [2,2]	5.07 [2,3]	5.29 [2,4]	5.51 [2,5]	5.73 [2,6]
	MLHM[M]...D	5.73 [2,6]	5.95 [2,7]	6.17 [2,8]	6.39 [2,9]	6.61 [3,0]
For F flange: +.441 [0,200]						7.05 [3,2]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

**FUNCTION DIAGRAMS**

**MLHM 8**

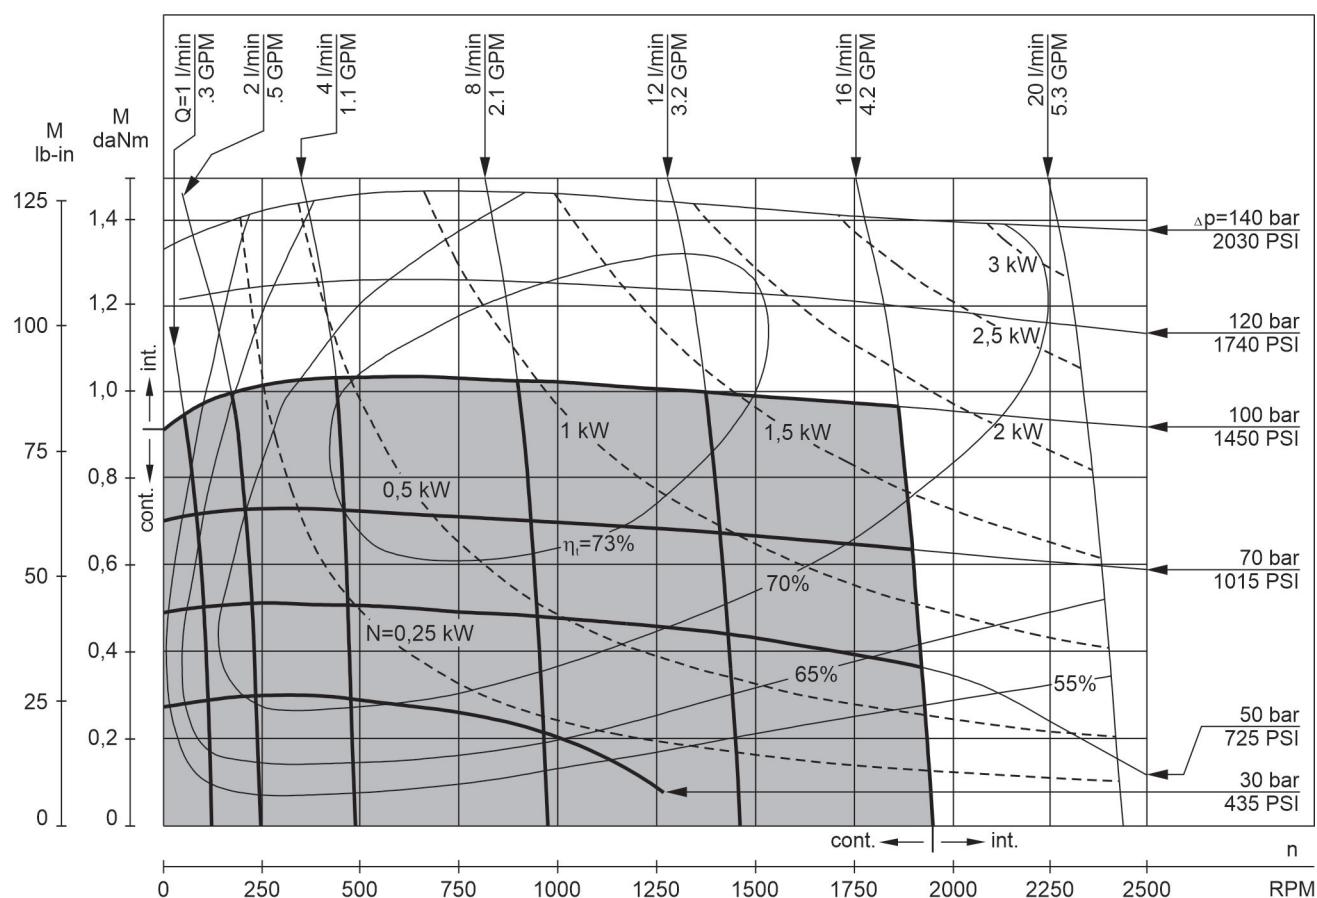


**MLHM 12,5**

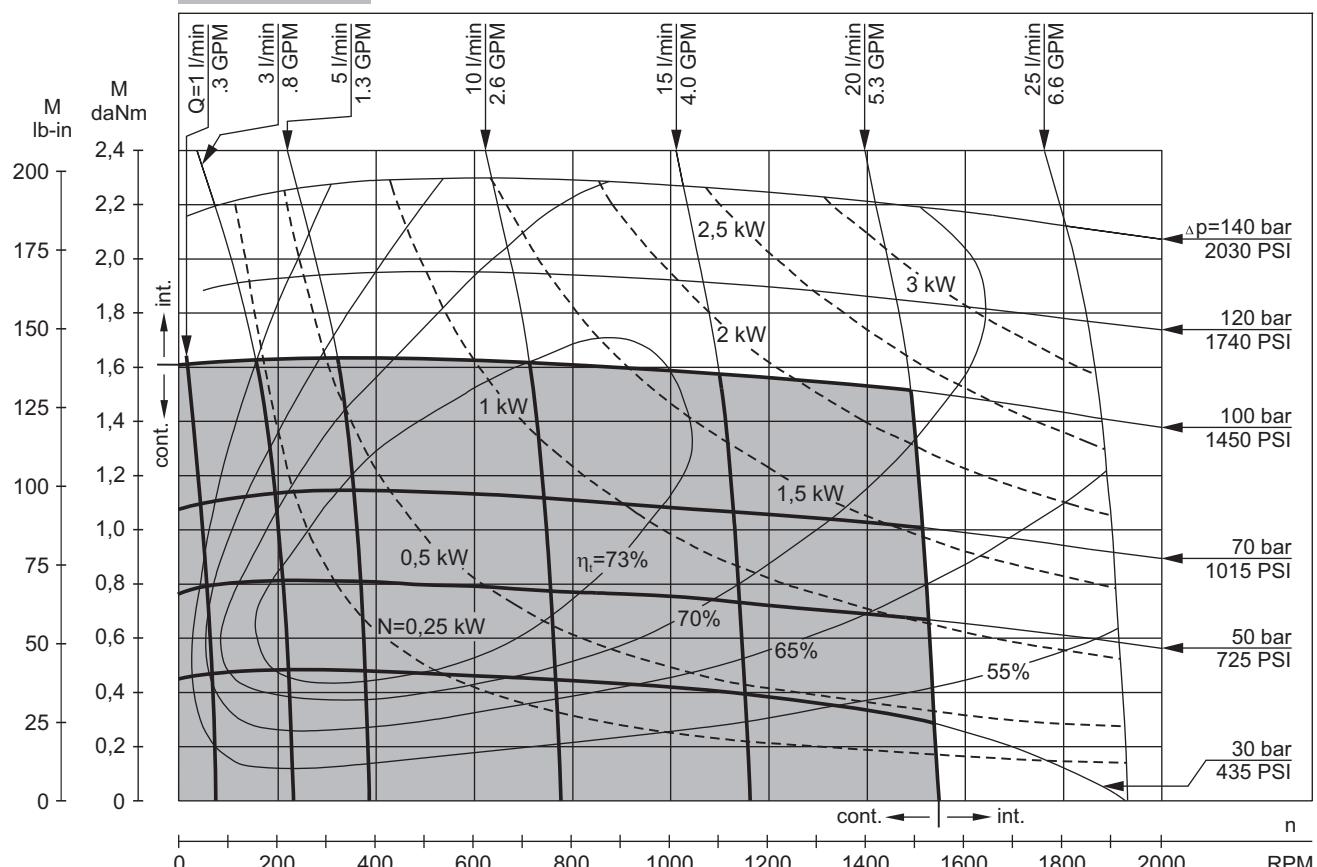


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI/145 PSI [5/10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

**FUNCTION DIAGRAMS**

**MLHM 20**

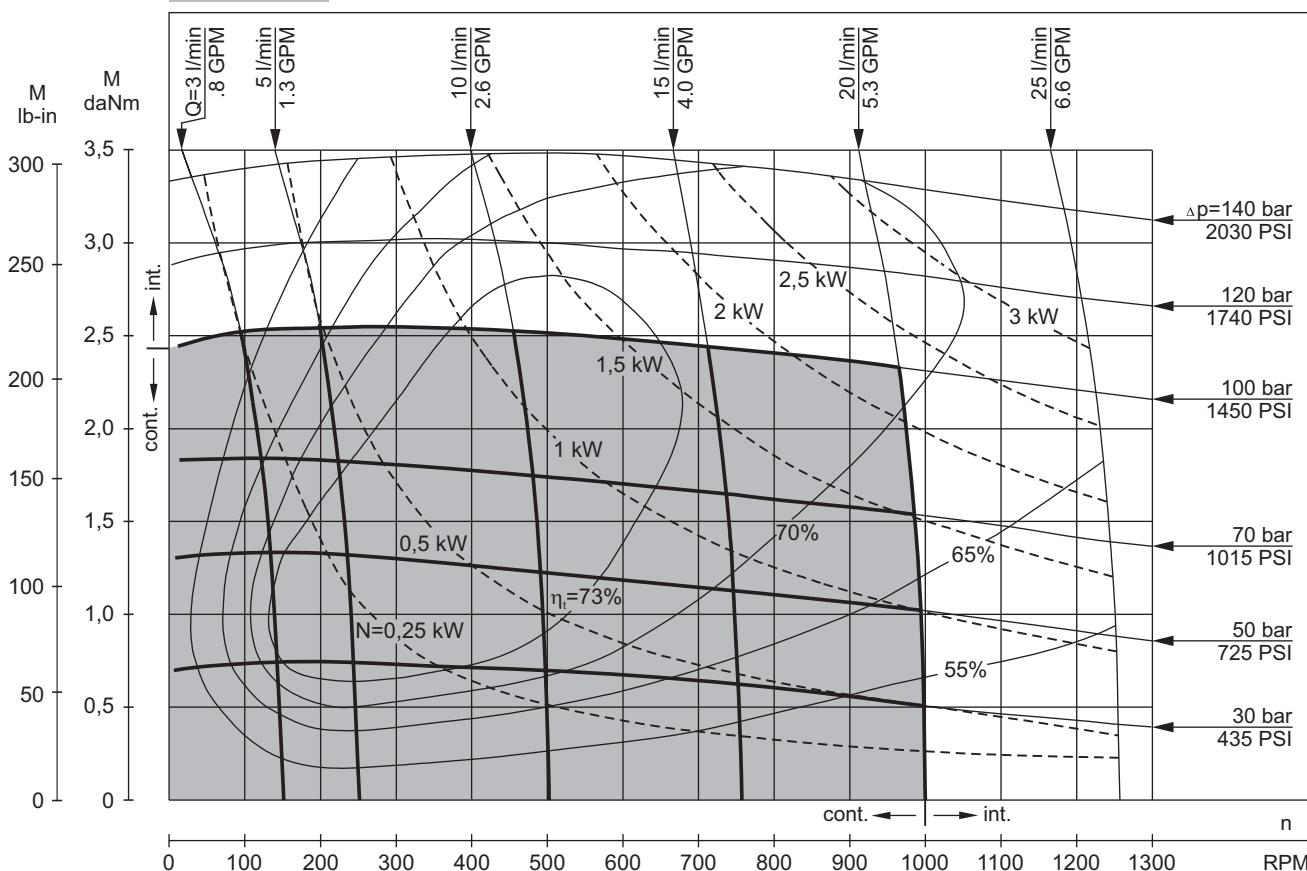


**MLHM 32**

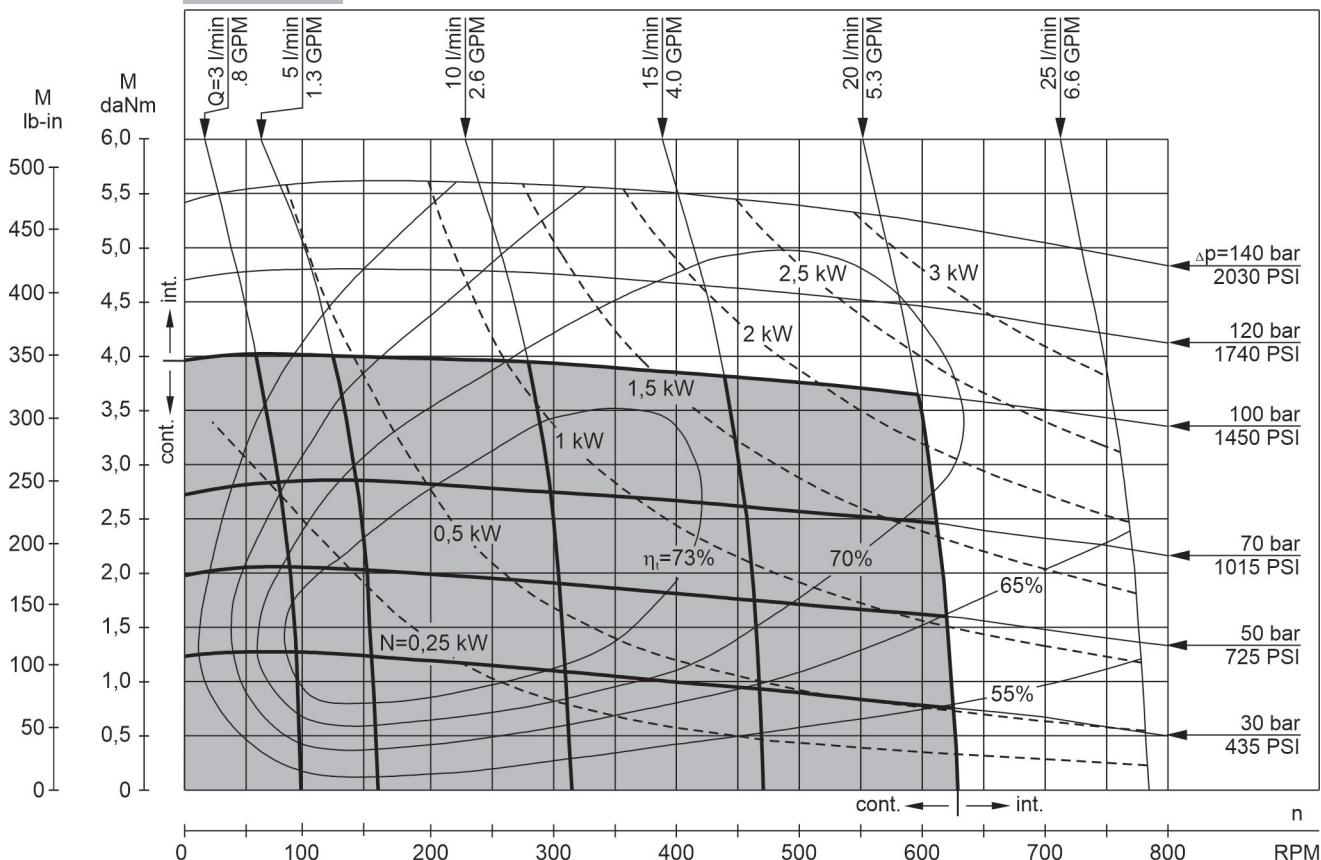


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

**FUNCTION DIAGRAMS**

**MLHM 40**

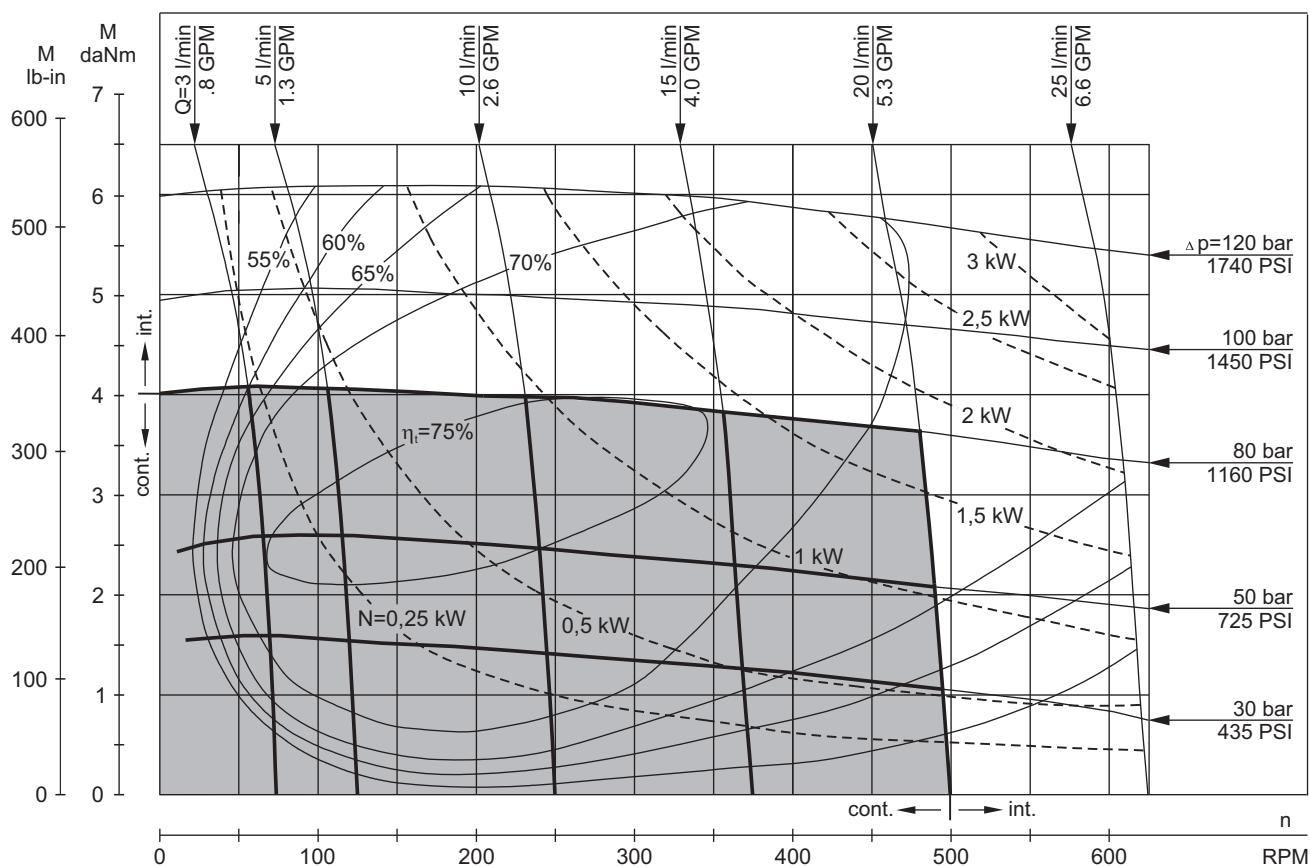


**MLHM 50**

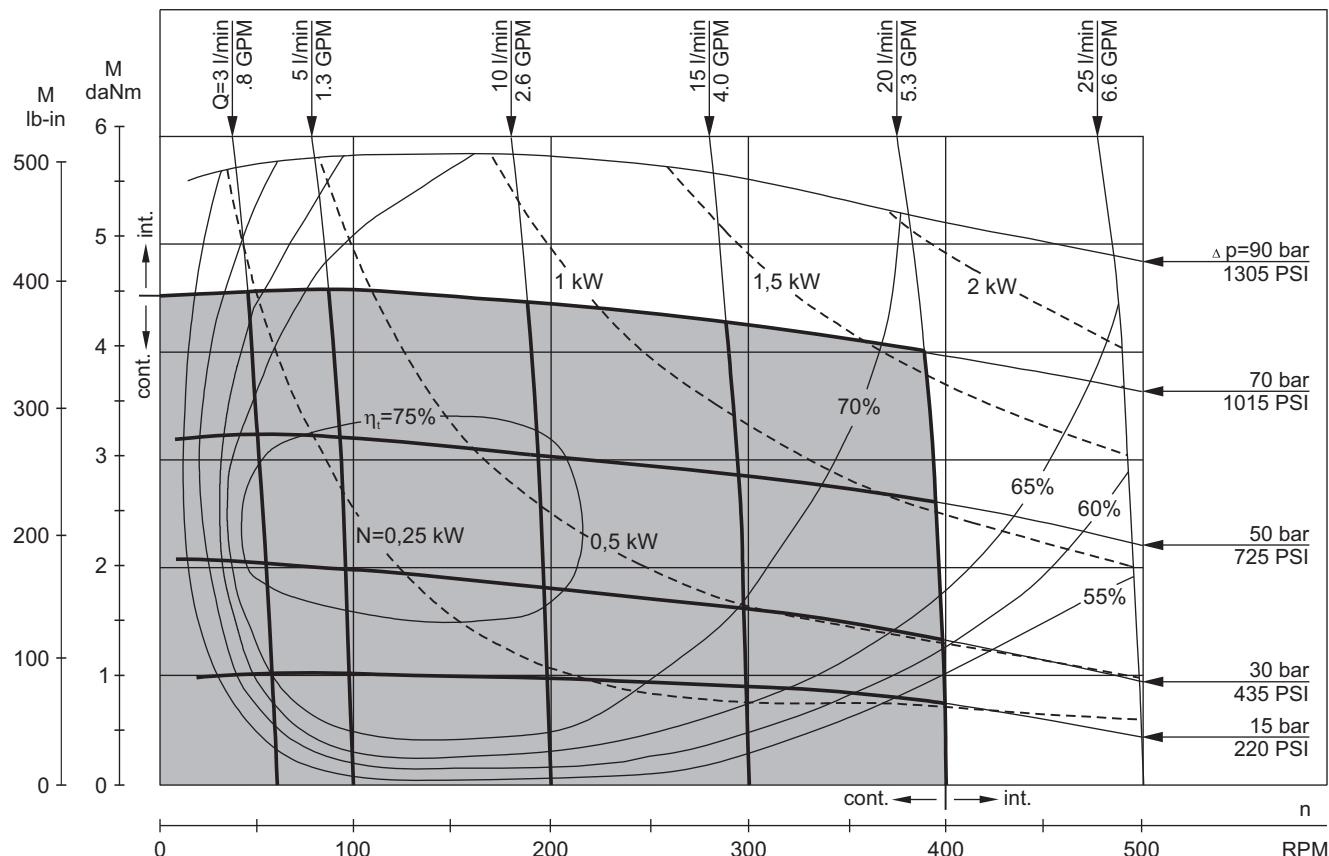

The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## DIMENSIONS and MOUNTING DATA MLHM, MLHMP, MLHMD

### Three Bolts Mount

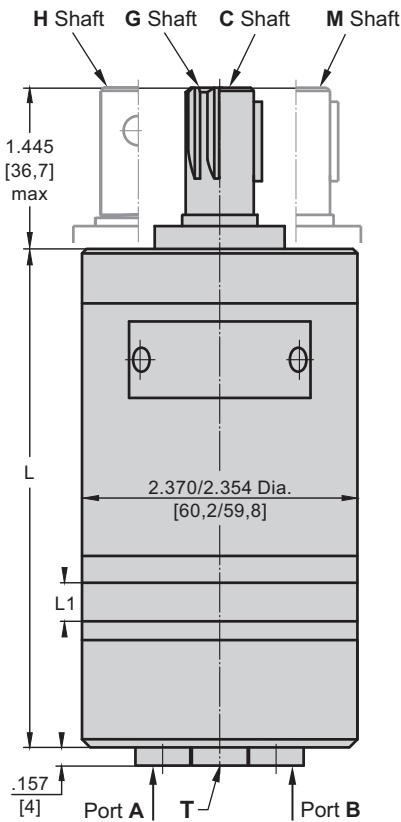

Shaft Dim.  
See Page 11


Flange Dim.  
See Page 10

Port Dim.  
See Page 10

**Standard Rotation**  
Viewed from Shaft End  
Port **A** Pressurized - CW  
Port **B** Pressurized - CCW

**Reverse Rotation**  
Viewed from Shaft End  
Port **A** Pressurized - CCW  
Port **B** Pressurized - CW

### F Oval Mount (2 Holes)

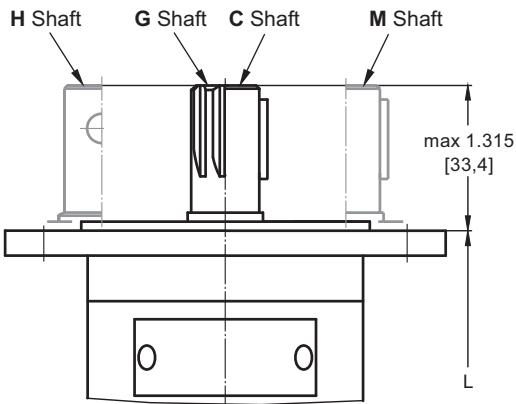


Rear Ports  
Version  
[6] [7] [9]

Side Ports  
Version  
[2] [3] [4]




**P**  
Side Ports

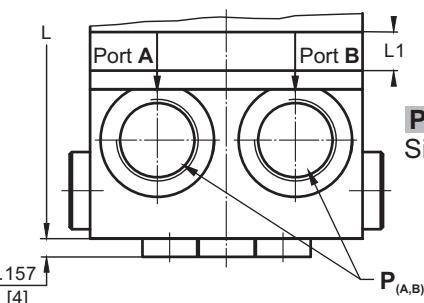

**P**



**D**  
Side Ports

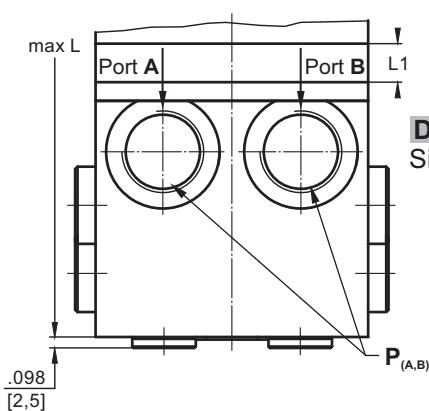

### Versions

	[2, 6]	[3, 9]	[4, 7]
<b>P<sub>(A,B)</sub></b>	2xG $\frac{3}{8}$	2xM18x1,5	2x $\frac{9}{16}$ -18 UNF
<b>T</b>	2xG $\frac{1}{8}$	M10x1	$\frac{3}{8}$ - 24 UNF

Type	Side Ports L, in [mm]	Rear Ports L, in [mm]	L <sub>1</sub> , in [mm]
MLHM(M) 8	4.189 [106,4]	4.134 [105,0]	.138 [ 3,5]
MLHM(M) 12,5	4.268 [108,4]	4.213 [107,0]	.217 [ 5,5]
MLHM(M) 20	4.386 [111,4]	4.331 [110,0]	.335 [ 8,5]
MLHM(M) 32	4.583 [116,4]	4.528 [115,0]	.531 [13,5]
MLHM(M) 40	4.720 [119,9]	4.665 [118,5]	.669 [17,0]
MLHM(M) 50	4.878 [123,9]	4.823 [122,5]	.828 [21,0]


Type	Side Ports L, in [mm]	Rear Ports L, in [mm]	L <sub>1</sub> , in [mm]
MLHMF 8	4.327 [109,9]	4.272 [108,5]	.138 [ 3,5]
MLHMF 12,5	4.406 [111,9]	4.350 [110,5]	.217 [ 5,5]
MLHMF 20	4.524 [114,9]	4.469 [113,5]	.335 [ 8,5]
MLHMF 32	4.720 [119,9]	4.665 [118,5]	.531 [13,5]
MLHMF 40	4.858 [123,4]	4.803 [122,0]	.669 [17,0]
MLHMF 50	5.016 [127,4]	4.961 [126,0]	.828 [21,0]

Type	L, in [mm]	Type	L, in [mm]	L <sub>1</sub> , in [mm]
MLHM(M) 8 ...P	4.567 [116,0]	MLHMF 8 ...P	4.665 [118,5]	.138 [ 3,5]
MLHM(M) 12,5...P	4.646 [118,0]	MLHMF 12,5...P	4.783 [121,5]	.217 [ 5,5]
MLHM(M) 20 ...P	4.764 [121,0]	MLHMF 20 ...P	4.902 [124,5]	.335 [ 8,5]
MLHM(M) 32 ...P	4.961 [126,0]	MLHMF 32 ...P	5.059 [128,5]	.531 [13,5]
MLHM(M) 40 ...P	5.079 [129,0]	MLHMF 40 ...P	5.236 [133,0]	.669 [17,0]
MLHM(M) 50 ...P	5.256 [133,5]	MLHMF 50 ...P	5.394 [137,0]	.828 [21,0]


Type	L, in [mm]	Type	L, in [mm]	L <sub>1</sub> , in [mm]
MLHM(M) 8 ...D	5.319 [135,1]	MLHMF 8 ...D	5.457 [138,6]	.138 [ 3,5]
MLHM(M) 12,5...D	5.398 [137,1]	MLHMF 12,5...D	5.535 [140,6]	.217 [ 5,5]
MLHM(M) 20 ...D	5.516 [140,1]	MLHMF 20 ...D	5.654 [143,6]	.335 [ 8,5]
MLHM(M) 32 ...D	5.713 [145,1]	MLHMF 32 ...D	5.850 [148,6]	.531 [13,5]
MLHM(M) 40 ...D	5.850 [148,6]	MLHMF 40 ...D	5.988 [152,1]	.669 [17,0]
MLHM(M) 50 ...D	6.008 [152,6]	MLHMF 50 ...D	6.146 [156,1]	.828 [21,0]

## MOUNTING

Three Bolts Mount

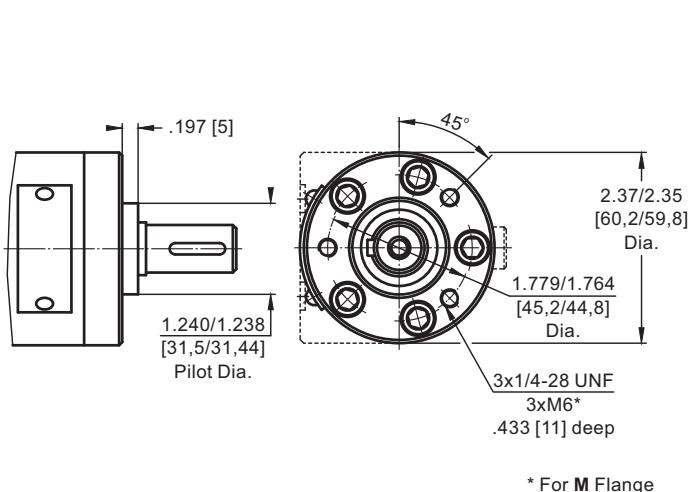


**F** Oval Mount (2 Holes)

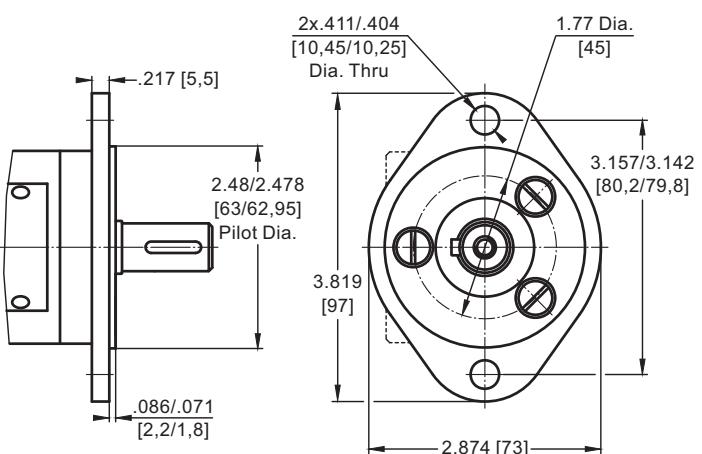


## PORTS


Rear Ports  
Version **6** **7** **9**

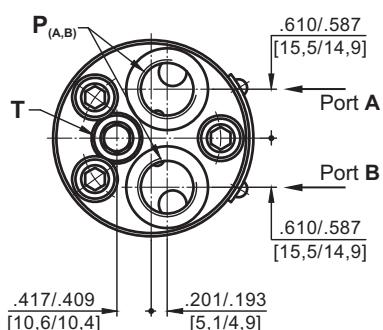



Side Ports, without valves  
Version **2** **3** **4**

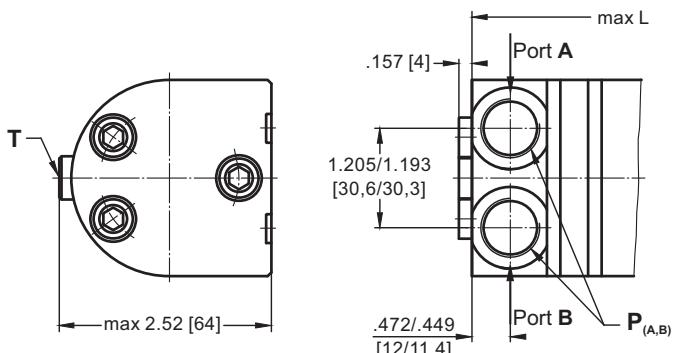

**P** Side Ports with Single Crossover Relief Valve

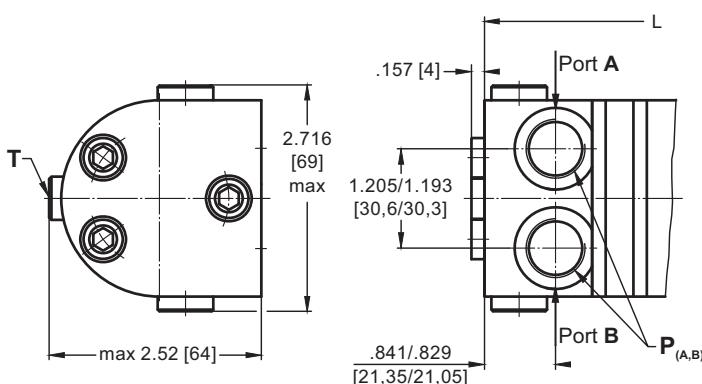

**D** Side Ports with Dual Crossover Relief Valve

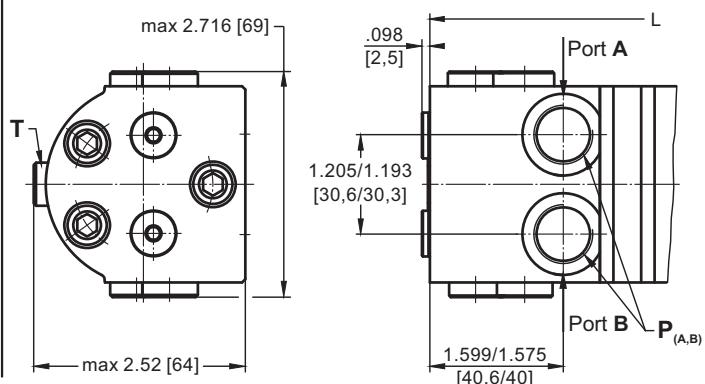

in [mm]


**Standard Rotation**  
Viewed from Shaft End  
Port A Pressurized - **CW**  
Port B Pressurized - **CCW**

**Reverse Rotation**  
Viewed from Shaft End  
Port A Pressurized - **CCW**  
Port B Pressurized - **CW**


	Versions		
	<b>2 , 6</b>	<b>3 , 9</b>	<b>4 , 7</b>
<b>P<sub>(A,B)</sub></b>	2xG <sup>3</sup> / <sub>8</sub>	2xM18x1,5	2x <sup>9</sup> / <sub>16</sub> -18 UNF
<b>T</b>	2xG <sup>1</sup> / <sub>8</sub>	M10x1	<sup>3</sup> / <sub>8</sub> - 24 UNF

## SHAFT EXTENSIONS


**C** -  $\frac{5}{8}$ " [15,8] straight, Parallel key  $\frac{3}{16}$ " $\times\frac{3}{16}$ " $\times\frac{3}{4}$ " BS46  
Max. Torque 345 lb-in [3,9 daNm]

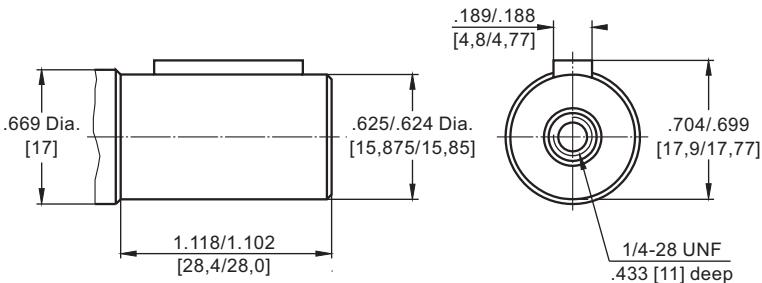


**G** - splined - metric B17x14 DIN 5482  
Max. Torque 390 lb-in [4,4 daNm]

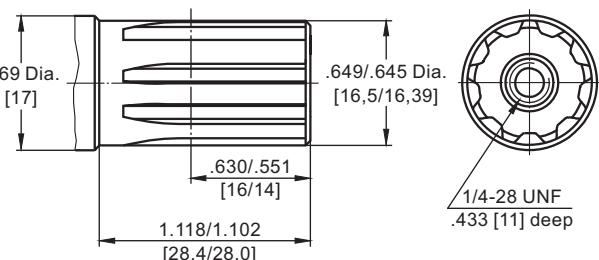

**H** -  $\frac{5}{8}$ " [15,8] straight, w/ .19 [4,82] Crosshole  
Max. Torque 345 lb-in [3,9 daNm]

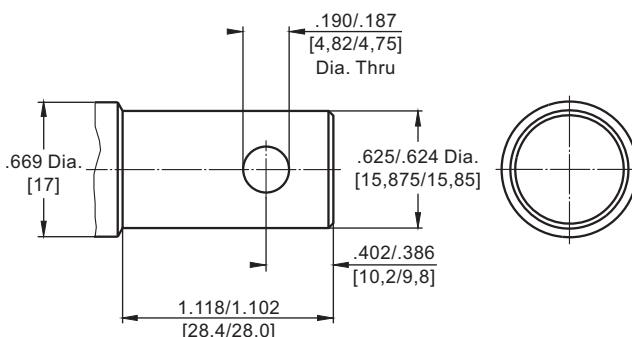

**M** - ø16 straight, Parallel key A5x5x16 DIN 6885  
Max. Torque 345 lb-in [3,9 daNm]

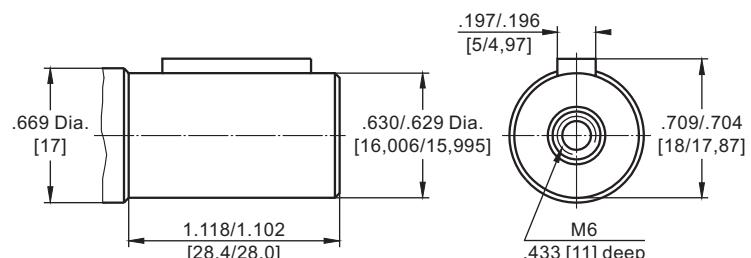


Requirement max. Torque must be not exceeded.



## PERMISSIBLE SHAFT LOAD

$$P_{rad}=360 \text{ lbs [160 daN]}$$

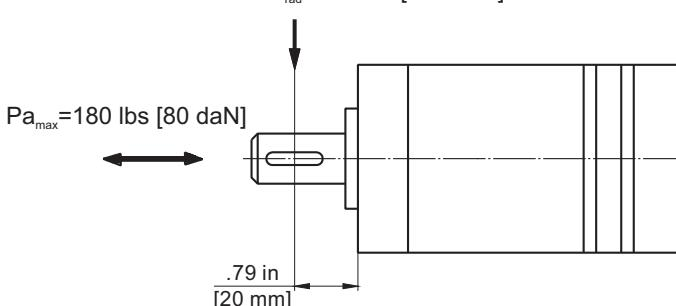


The permissible radial shaft load [ $P_{rad}$ ] is calculated from the distance [ $L$ ] between the point of load application and the mounting surface:

$$P_{rad} = \frac{600}{n} \times \frac{13040}{61,5+L}, [\text{daN}]$$

[ $L$  in mm;  $L \leq 80$  mm]

$$P_{rad} = \frac{600}{n} \times \frac{1155}{2,42+L}, [\text{lbs}]$$

[ $L$  in inch;  $L \leq 3,15$  in]

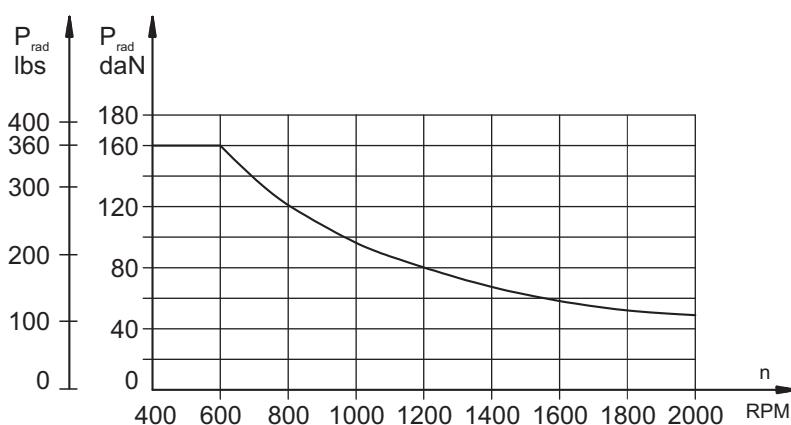

The drawing shows the permissible radial load when  $L= .79$  in [20 mm].

If the calculated shaft load exceeds the permissible, a flexible coupling must be used.

<b>MLHM</b>	1	2	3	4	5	6	7	8	9
-------------	---	---	---	---	---	---	---	---	---

**Pos.1 - Mounting Flange**

omit - round, three bolts 1/4-28 UNF

**F** - flange, two holes

**M** - round metric, three bolts M6

**Pos.2 - Displacement code**

**8** - .50 in<sup>3</sup>/rev [ 8,2 cm<sup>3</sup>/rev]

**12.5** - .79 in<sup>3</sup>/rev [12,9 cm<sup>3</sup>/rev]

**20** - 1.22 in<sup>3</sup>/rev [20,0 cm<sup>3</sup>/rev]

**32** - 1.93 in<sup>3</sup>/rev [31,8 cm<sup>3</sup>/rev]

**40** - 2.44 in<sup>3</sup>/rev [40,0 cm<sup>3</sup>/rev]

**50** - 3.05 in<sup>3</sup>/rev [50,0 cm<sup>3</sup>/rev]

**Pos.3 - Shaft Extensions\*** [for dimensions data see page 111]

**C** - 5/8" [15,8] straight, Parallel key

**VC** - 5/8" [15,8] straight, Parallel key w/ corrosion resistant bushing

**G** - Involute Splined- Metric B17x14 DIN5482

**H** - 5/8" [15,8] straight, Parallel key w/ .19 [4,82] Crosshole

**M** - 16 mm straight, Parallel key

**VM** - 16 mm straight, Parallel key w/ corrosion resistant bushing

**Pos.4 - Port Size/Type** [standard manifold to each]

**2** - side ports, 2xG3/8, G1/8, BSP thread, ISO 228

**3** - side ports, 2xM18x1,5; M10x1; metric, ISO 262

**4** - side ports, 2x9/16-18 UNF, O-ring, 3/8-24 UNF

**6** - rear ports, 2xG3/8, G1/8, BSP thread, ISO 228

**7** - rear ports, 2x9/16-18 UNF, O-ring, 3/8-24 UNF

**9** - rear ports, 2xM18x1,5; M10x1; metric, ISO 262

**Pos.5 - Option\*\***

omit - without valves

**D** - side ports with dual crossover relief valve

**P** - side ports with single crossover relief valve

**Pos.6 - Directions for Control** [for "P" option only]

**/L** - B → A (left control)

**/R** - A → B (right control)

**Pos.7 - Valve Rated Pressure** [for "P" and "D" option only]

**/50** - Δp= 725 PSI [50 bar]

**/80** - Δp=1160 PSI [80 bar]

**/100** - Δp=1450 PSI [100 bar]

**/140** - Δp=2030 PSI [140 bar]

**Pos.8 - Special Features** [see page 110]

**Pos.9 - Design Series**

omit - Factory specified

**NOTES:** \* The permissible output torque for shafts must not be exceeded!


\*\* Options **P**, **D** - for side ports (2, 3, 4) only.

The hydraulic motors are mangano-phosphatized as standard.

**⚠ MLHMP and MLHMD** are available with new crossover relief valves with improved characteristics. The new valves allow easier pressure setting in a wider range: from 725 PSI to 2030 PSI [50÷140 bar]. For more information about MLHMP and MLHMD - series 2 please contact with "M+S Hydraulic".

**F - Flange (2 Holes)**

Order No for Flange: 48443 029 00

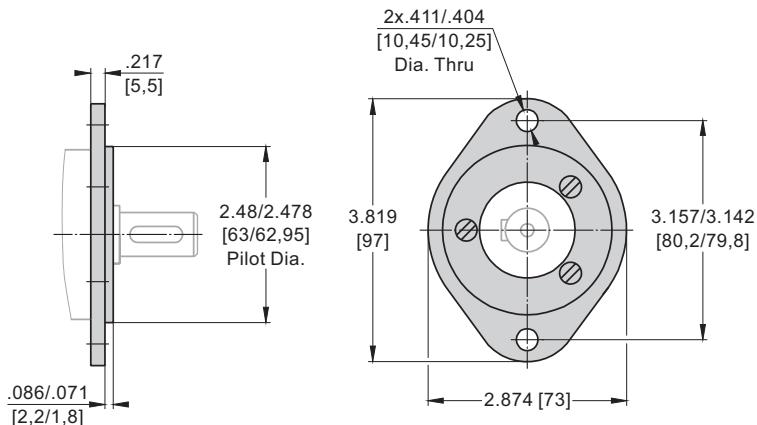

**F** Flange is mounted to the motor with 3 screws - 1/4-28 UNF.


Tightening Torque: 45÷53 lb-in [5÷6 Nm].

# HYDRAULIC MOTORS MLHP



## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Grass cutting machinery etc.



## CONTENTS

Specification data .....	14÷17
Function diagrams .....	18÷24
Dimensions and mounting .....	25÷26
Wheel motor .....	27
Shaft extensions .....	28÷29
Permissible shaft loads .....	30
Permissible shaft seal pressure ....	31
Order code .....	32

## OPTIONS

- » Model - Spool valve, gerotor
- » Flange and wheel mount
- » Motor with needle bearing
- » Side and rear ports
- » Shafts - straight, splined and tapered
- » Shaft seal for high and low pressure
- » SAE, Metric and BSPP ports
- » Speed sensing
- » Other special features


## GENERAL

<b>Max. Displacement,</b> in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	38.05 [623,6]	
<b>Max. Speed,</b> [RPM]	1815	
<b>Max. Torque,</b> lb-in [daNm]	cont.: 4415 [50]	int.: 5565 [64]
<b>Max. Output,</b> HP [kW]	17.1 [12,8]	
<b>Max. Pressure Drop,</b> PSI [bar]	cont.: 2030 [140]	int.: 2540 [175]
<b>Max. Oil Flow,</b> GPM [lpm]	19.8 [75]	
<b>Min. Speed,</b> [RPM]	10	
<b>Pressure fluid</b>	Mineral based - HLP(DIN 51524) or HM(ISO 6743/4)	
<b>Temperature range,</b> °F [°C]	-40 ÷ 284 [-40 ÷ 140]	
<b>Optimal Viscosity range,</b> SUS [mm <sup>2</sup> /s]	98 ÷ 347 [20 ÷ 75]	
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 microns)	

Oil flow in drain line

Pressure drop PSI [bar]	Viscosity SUS [mm <sup>2</sup> /s]	Oil flow in drain line GPM [lpm]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]

Pressure Losses

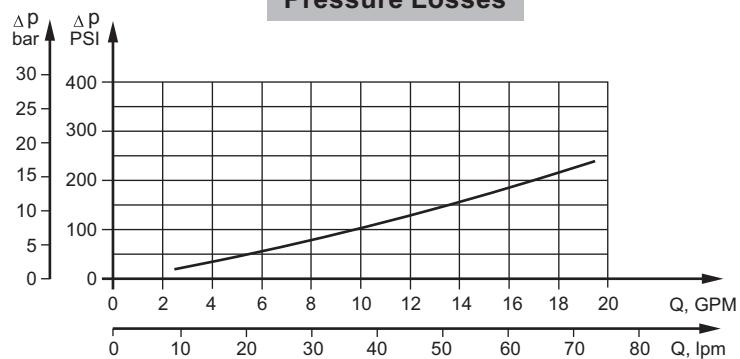

## SPECIFICATION DATA

Specification Data for MLHP... motors with **C, D, G, H, M, S** and **T** shafts.

(1.124 [28,56] sealing diameter)

Type	MLHP 25	MLHP 32	MLHP 40	MLHP 50	MLHP 63	MLHP 80	MLHP 100	MLHP 125
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	1.73 [28,4]	2.1 [34,5]	2.47 [40,5]	3.02 [49,5]	3.8 [62,3]	4.83 [79,2]	6.04 [99]	7.55 [123,8]
<b>Max. Speed, [RPM]</b>	Cont. Int.*	1408 1584	1450 1594	1480 1555	1210 1515	1210 1515	755 945	605 755
<b>Max. Torque, lb-in [daNm]</b>	Cont. Int.* Peak**	290 [3,3] 415 [4,7] 595 [6,7]	380 [4,3] 415 [4,7] 760 [8,6]	550 [6,2] 1050 [11,9] 950 [10,7]	835 [9,4] 1050 [11,9] 1285 [14,3]	835 [9,4] 1725 [19,5] 1285 [14,3]	1340 [15,1] 2100 [23,7] 1985 [22,4]	1710 [19,3] 2435 [27,5] 2435 [27,5]
<b>Max. Output, HP [kW]</b>	Cont. Int.*	6.0 [4,5] 8.2 [6,1]	6.0 [4,5] 10.5 [7,8]	11.5 [8,4] 15.5 [11,6]	13.5 [10,1] 16.1 [12,2]	13.5 [10,1] 16.1 [12,2]	13.7 [10,2] 16.8 [12,5]	14.1 [10,5] 17.1 [12,8]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont. Int.* Peak**	1450 [100] 2030 [140] 3260 [225]	1450 [100] 2030 [140] 3260 [225]	1750 [120] 2250 [155] 3260 [225]	2030 [140] 2540 [175] 3260 [225]	2030 [140] 2540 [175] 3260 [225]	2030 [140] 2540 [175] 3260 [225]	2030 [140] 2540 [175] 3260 [225]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont. Int.*	10.5 [40] 11.9 [45]	13.2 [50] 14.5 [55]	15.9 [60] 18.5 [70]	15.9 [60] 19.8 [75]	15.9 [60] 19.8 [75]	15.9 [60] 19.8 [75]	15.9 [60] 19.8 [75]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]			
<b>Max. Return Pressure with Drain Line, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]			
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	145 [10]	145 [10]	145 [10]	145 [10]	131 [9]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont. At max.press. drop Int.*	265 [3,0] 4,2 [370]	355 [4,0] 5,6 [500]	480 [5,4] 6,8 [600]	690 [7,8] 10 [885]	690 [7,8] 10 [885]	1170 [13,2] 16,8 [1490]	1470 [16,6] 21 [1860]
<b>Min. Speed***, [RPM]</b>		20	15		10	10	10	10
<b>Weight, lb [kg]</b>	MLHP[F][N] MLHPW[N] MLHPQ[N]	12.3 [5,6] 11.7 [5,3] 11.1 [5,0]	12.3 [5,6] 11.7 [5,3] 11.1 [5,0]	12.6 [5,7] 11.9 [5,4] 11.2 [5,1]	12.8 [5,8] 12.1 [5,5] 11.5 [5,2]	12.8 [5,8] 12.1 [5,5] 11.5 [5,2]	13.2 [5,9] 12.4 [5,6] 11.7 [5,3]	13.5 [6,1] 12.8 [5,8] 12.1 [5,5]
For rear ports: +.992 [0,450]								13.7 [6,2] 13.2 [5,9] 12.4 [5,6]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## SPECIFICATION DATA (continued)

Specification Data for MLHP... motors with **C, D, G, H, M, S** and **T** shafts.

(1.124 [28,56] sealing diameter)

Type	MLHP 160	MLHP 200	MLHP 250	MLHP 315	MLHP 400	MLHP 500	MLHP 630
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	9.66 [158,4]	12.1 [198]	15.1 [247,5]	19.3 [316,8]	24.16 [396]	30.2 [495]	38.05 [623,6]
<b>Max. Speed, [RPM]</b>	Cont.	378	303	242	190	150	120
	Int.*	472	378	303	236	189	150
<b>Max. Torque, lb-in [daNm]</b>	Cont.	2770 [31,3]	3240 [36,6]	3360 [38]	3360 [38]	3190 [36]	3452 [39]
	Int.*	3345 [37,8]	4035 [45,6]	5160 [58,3]	4960 [56]	5240 [59]	5045 [57]
	Peak**	3880 [43,8]	4870 [55]	6060 [68,5]	7505 [85]	7560 [85,4]	6903 [78]
<b>Max. Output, HP [kW]</b>	Cont.	13.5 [10,1]	13.5 [10]	10 [7,5]	7.9 [5,8]	6.2 [4,6]	4.7 [3,5]
	Int.*	16.2 [12,1]	16.1 [12]	16.1 [12]	12.1 [9]	10.5 [7,8]	9.7 [7,2]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	1600 [110]	1300 [90]	1015 [70]	870 [60]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2030 [140]	1665 [115]	1305 [90]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	2610 [180]	1885 [130]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont.	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]
	Int.*	19.8 [75]	19.8 [75]	19.8 [75]	19.8 [75]	19.8 [75]	19.8 [75]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont.	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2030 [140]
	Int.*	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Return Pres- sure with Drain Line, PSI [bar]</b>	Cont.	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2030 [140]
	Int.*	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		116 [8]	100 [7]	87 [6]	73 [5]	73 [5]	73 [5]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont.	2500 [28,2]	2950 [33,5]	2970 [33,6]	3045 [34,4]	3050 [34,5]	3180 [36]
	At max.press. drop Int.*	3140 [35,5]	3770 [42,6]	4795 [54,2]	5480 [61,9]	5390 [60,8]	4780 [54]
<b>Min. Speed***, [RPM]</b>		10	10	10	10	10	10
<b>Weight, lb [kg]</b>	MLHP[F][N]	14.1 [6,4]	14.6 [6,6]	15 [6,8]	15.6 [7,1]	16.8 [7,6]	20 [8,9]
For rear ports: +.992 [0,450]	MLHPW[N]	13.5 [6,1]	13.9 [6,3]	14.3 [6,5]	15 [6,8]	15.9 [7,2]	19.0 [8,6]
	MLHPQ[M][N]	12.8 [5,8]	13.2 [6]	13.7 [6,2]	14.3 [6,5]	15 [6,8]	18.3 [8,3]
							19.8 [9]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## SPECIFICATION DATA (continued)

Specification Data for MLHP... motors with **B**, **K**, **R** and **L** shafts.

(1.378 [35] sealing diameter)

Type		MLHP 80	MLHP 100	MLHP 125	MLHP 160	MLHP 200
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>		4.83 [79,2]	6.04 [99]	7.55 [123,8]	9.66 [158,4]	12.1 [198]
<b>Max. Speed, [RPM]</b>	Cont.	755	605	486	378	303
	Int.*	945	755	605	472	378
<b>Max. Torque, lb-in [daNm]</b>	Cont.	1340 [15,15]	1710 [19,3]	2100 [23,7]	2770 [31,3]	3240 [36,6]
	Int.*	1725 [19,5]	2100 [23,7]	2640 [29,8]	3345 [37,8]	4035 [45,6]
	Peak**	1985 [22,4]	2435 [27,5]	3235 [36,5]	3875 [43,8]	4870 [55]
<b>Max. Output, HP [kW]</b>	Cont.	13.7 [10,2]	14.1 [10,5]	13.7 [10,2]	13.5 [10,1]	13.5 [10]
	Int.*	16.8 [12,5]	17.1 [12,8]	16.1 [12]	16.2 [12,1]	16.1 [12]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont.	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]
	Int.*	19.8 [75]	19.8 [75]	19.8 [75]	19.8 [75]	19.8 [75]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont.	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Int.*	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Return Pres- sure with Drain Line, PSI [bar]</b>	Cont.	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Int.*	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	131 [9]	116 [8]	100 [7]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont.	1170 [13,2]	1470 [16,6]	1830 [20,7]	2500 [28,2]	2950 [33,5]
	At max.press. drop Int.*	1490 [16,8]	1860 [21]	2360 [26,6]	3140 [35,5]	3770 [42,6]
<b>Min. Speed***, [RPM]</b>		10	10	10	10	10
<b>Weight, lb [kg]</b>	MLHP[F]	13.2 [6]	13.7 [6,2]	13.9 [6,3]	14.3 [6,5]	14.8 [6,7]
For rear ports: +.992 [0,450]						

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## SPECIFICATION DATA (continued)

Specification Data for MLHP... motors with **B**, **K**, **R** and **L** shafts.

(1.378 [35] sealing diameter)

Type	MLHP 250	MLHP 315	MLHP 400	MLHP 500	MLHP 630
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	15.1 [247,5]	19.3 [316,8]	24.16 [396]	30.2 [495]	38.05 [623,6]
<b>Max. Speed, [RPM]</b>	Cont. Int.*	242 303	190 236	150 189	120 150
<b>Max. Torque, lb-in [daNm]</b>	Cont. Int.* Peak**	4160 [47] 5160 [58,3] 6060 [68,5]	4360 [48] 4960 [56] 7505 [85]	4415 [50] 5240 [59] 7560 [85,4]	3452 [39] 5045 [57] 6903 [78]
<b>Max. Output, HP [kW]</b>	Cont. Int.*	12.1 [9] 16.1 [12]	10.2 [7,6] 12.1 [9]	8.3 [6,2] 10.5 [7,8]	4.7 [3,5] 9.7 [7,2]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont. Int.* Peak**	3030 [140] 2540 [175] 3260 [225]	1740 [120] 2030 [140] 3260 [225]	1400 [95] 1670 [115] 2610 [180]	870 [60] 1305 [90] 1885 [130]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont. Int.*	15.9 [60] 19.8 [75]	15.9 [60] 19.8 [75]	15.9 [60] 19.8 [75]	15.9 [60] 19.8 [75]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]	2030 [140] 2540 [175] 3260 [225]
<b>Max. Return Pres- sure with Drain Line, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]	2540 [175] 2900 [200] 3260 [225]	2030 [140] 2540 [175] 3260 [225]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		87 [6]	73 [5]	73 [5]	73 [5]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont. At max.press. drop Int.*	3790 [42,8] 4795 [54,2]	4050 [45,8] 5480 [61,9]	4140 [46,8] 5390 [60,8]	3180 [36] 4780 [54]
<b>Min. Speed***, [RPM]</b>		10	10	10	10
<b>Weight, lb [kg]</b>	MLHP[F]	15.2 [6,9]	15.9 [7,2]	17 [7,7]	19.9 [9,0]
For rear ports: +.992 [0,450]					21.2 [9,6]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## FUNCTION DIAGRAMS

**MLHP 25**

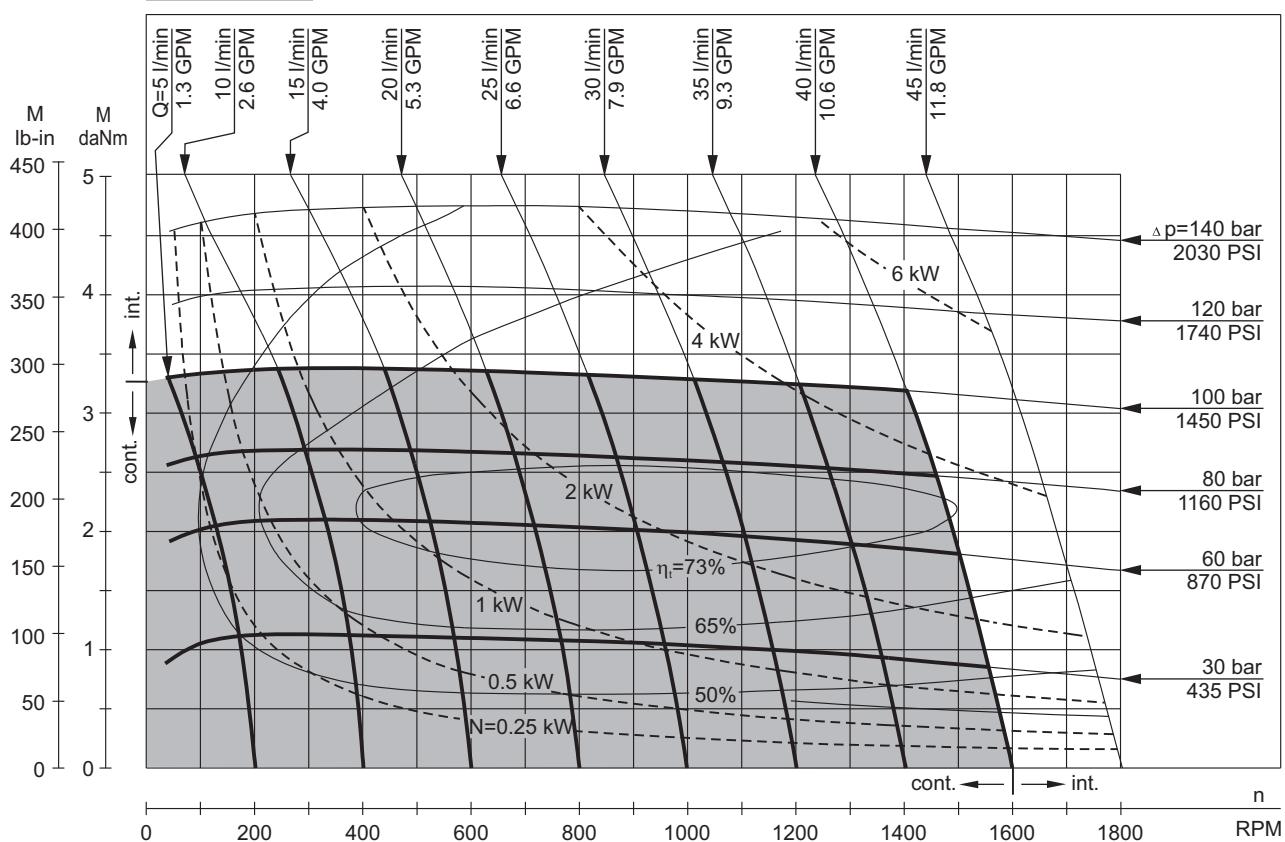


**MLHP 32**

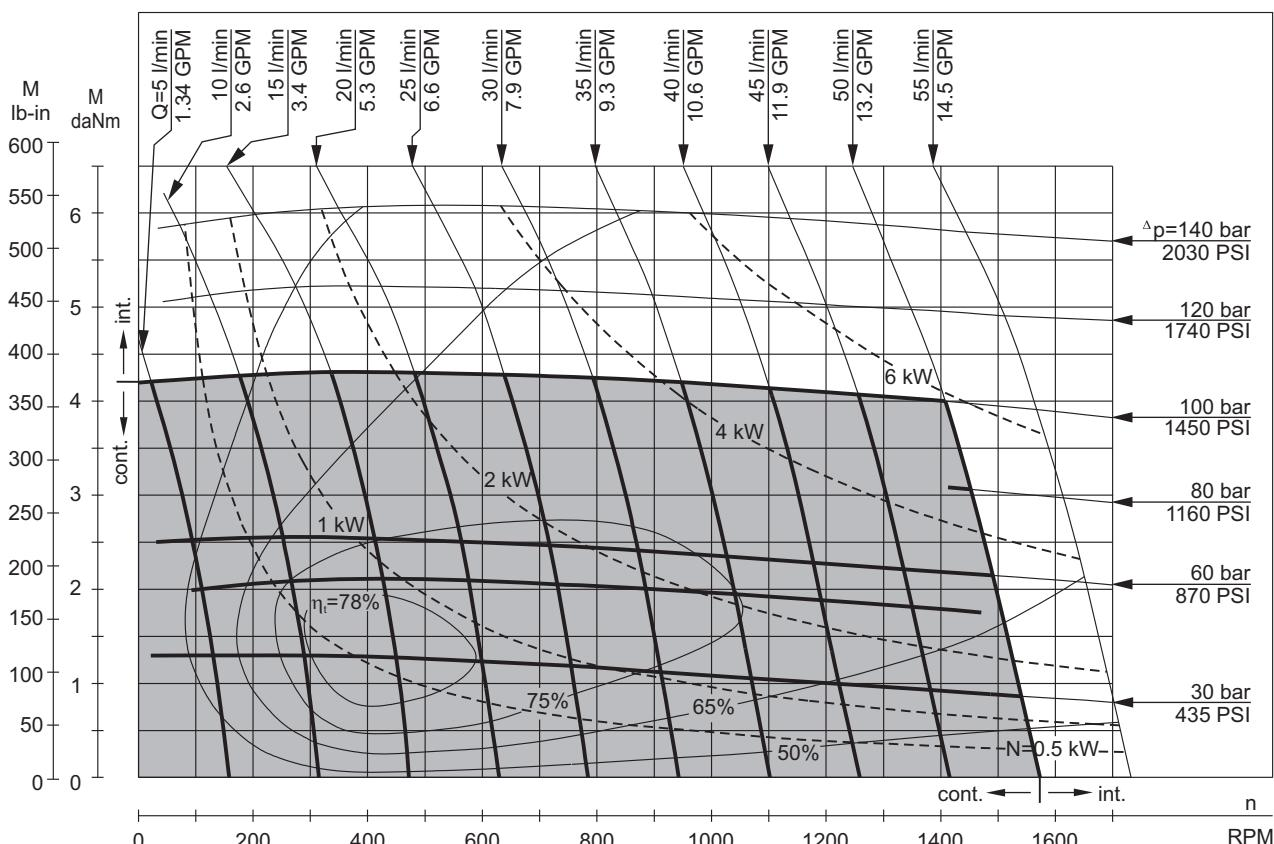


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI +145 PSI [5+10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHP 40**

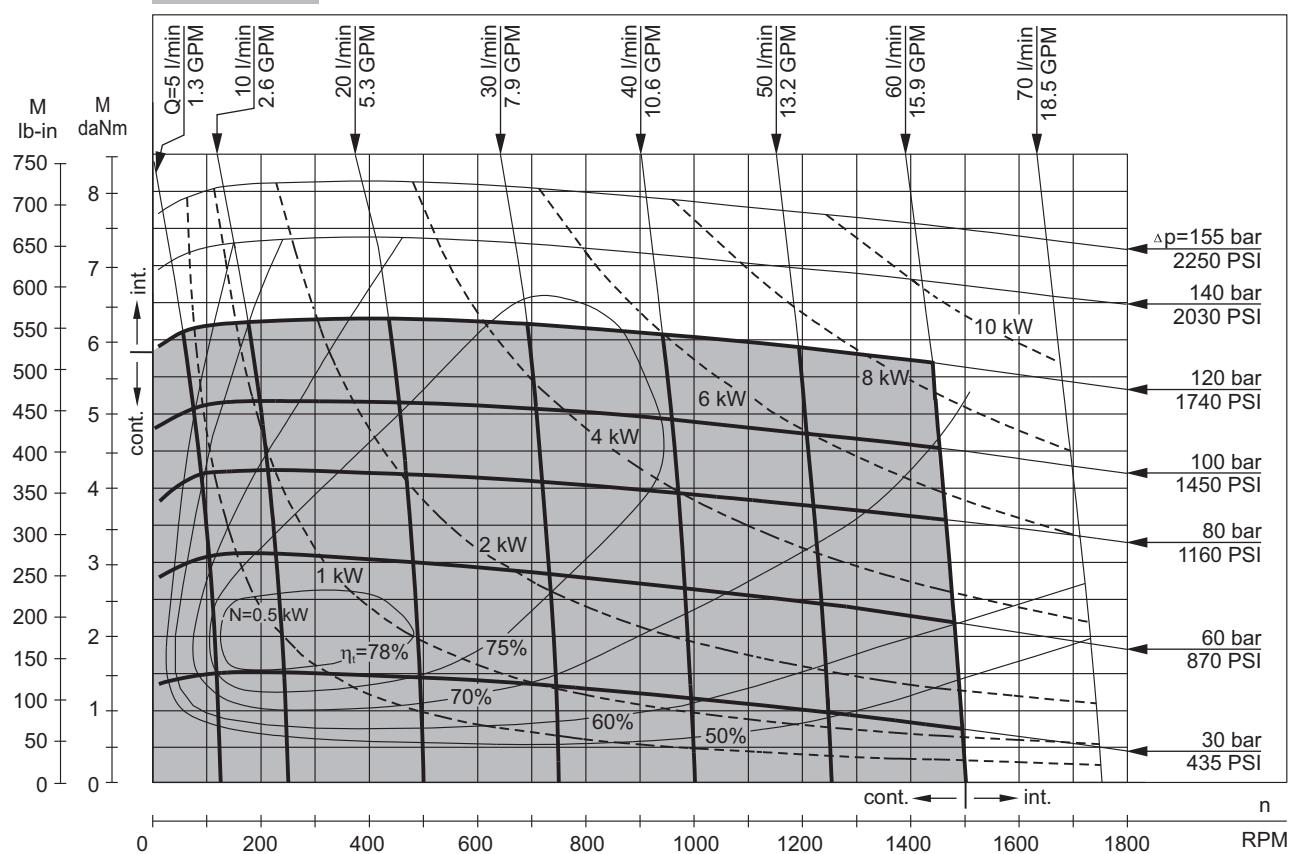


**MLHP 50**

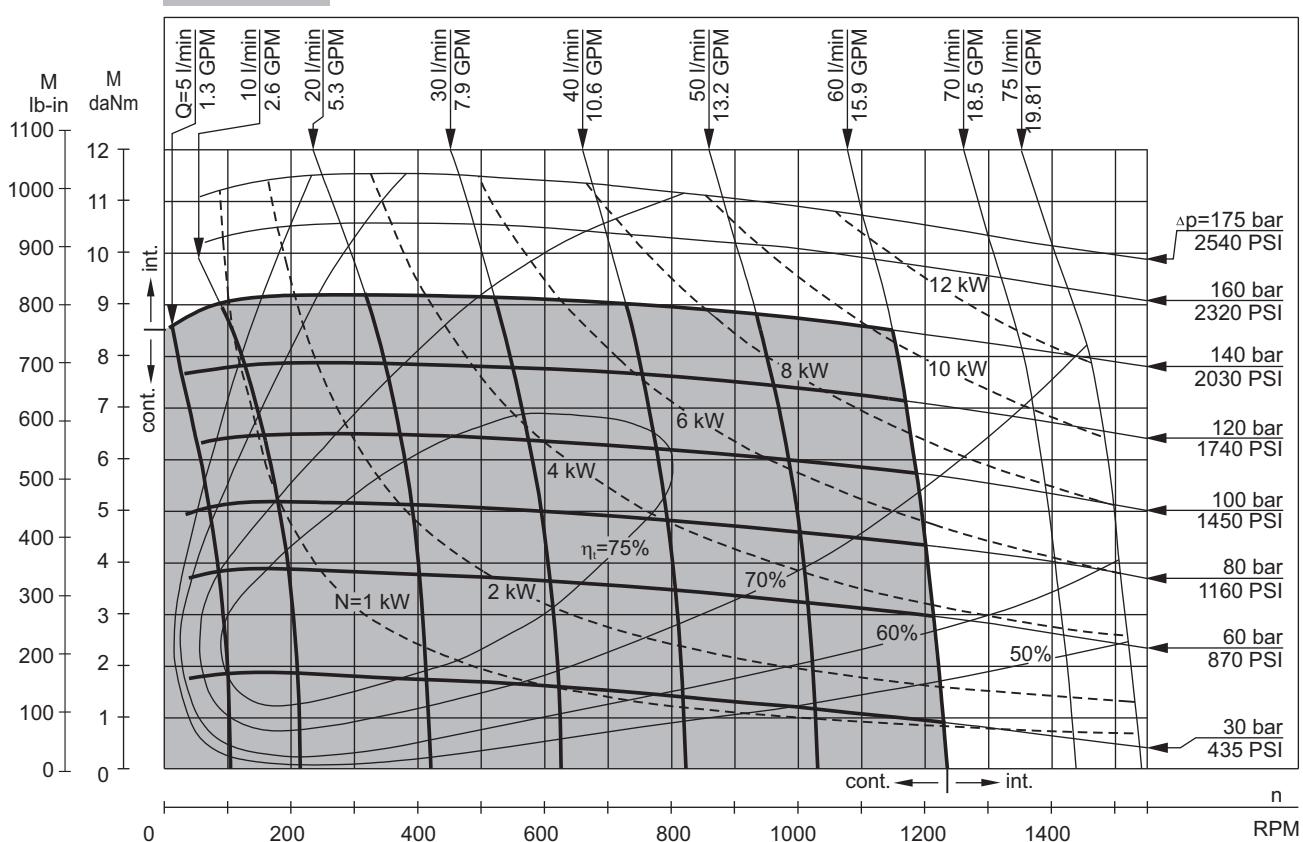


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI +145 PSI [5-10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHP 80**

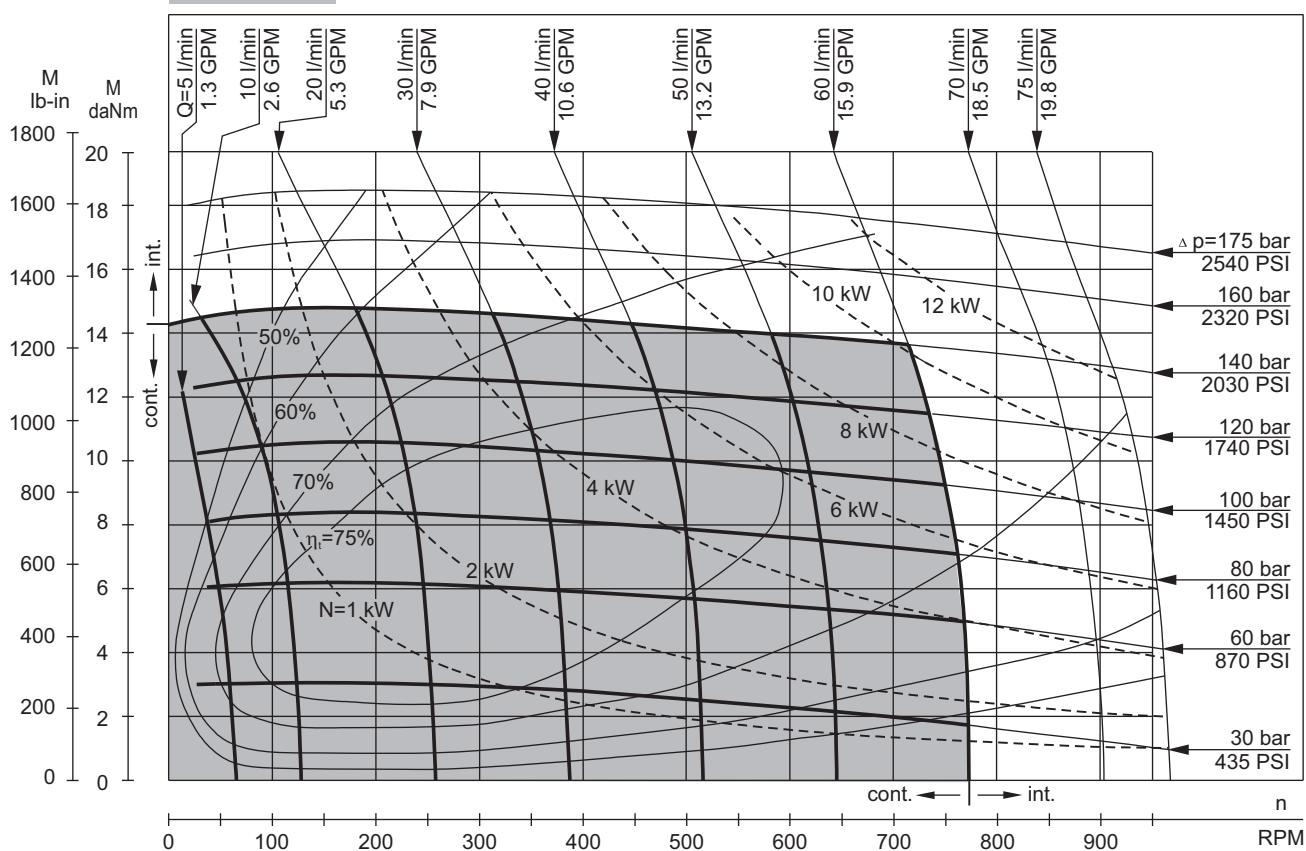


**MLHP 100**

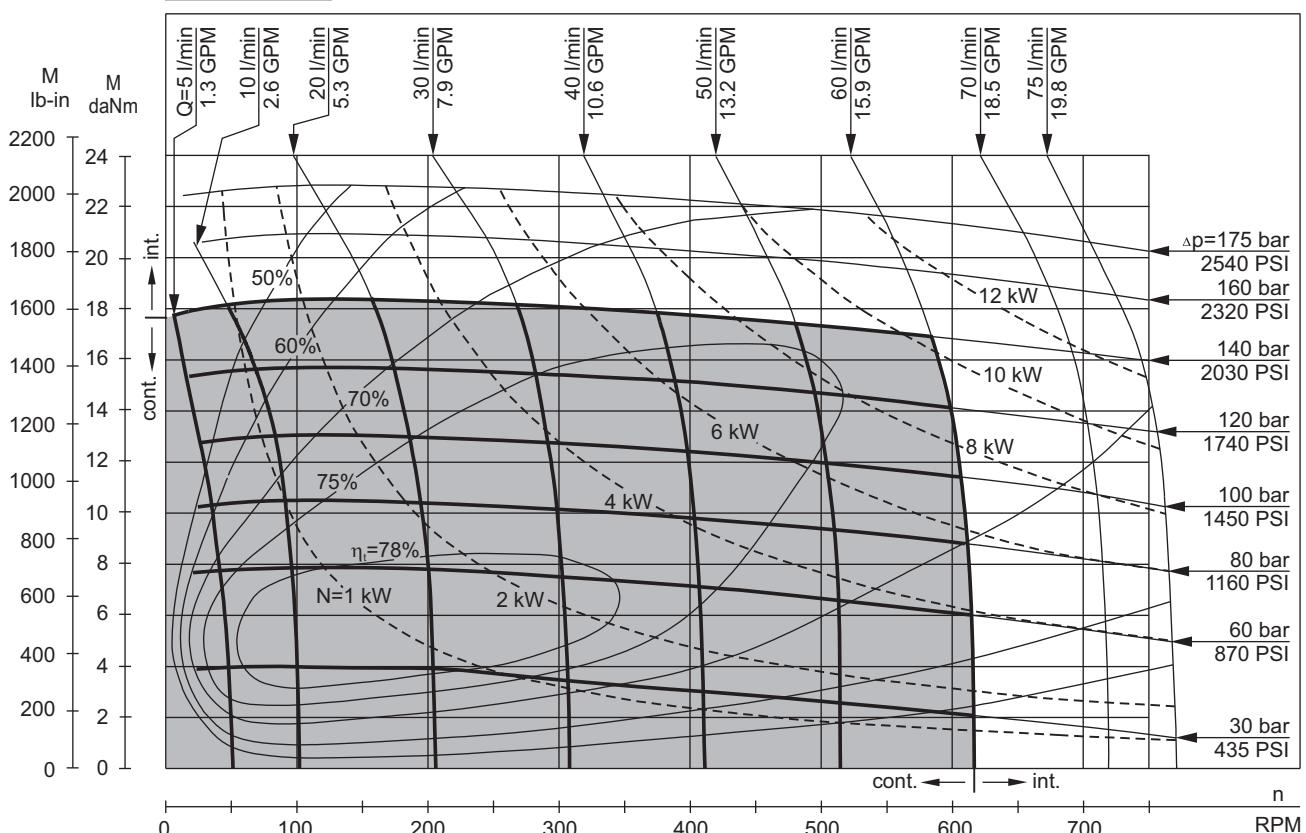


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI+145 PSI [5+10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHP 125**

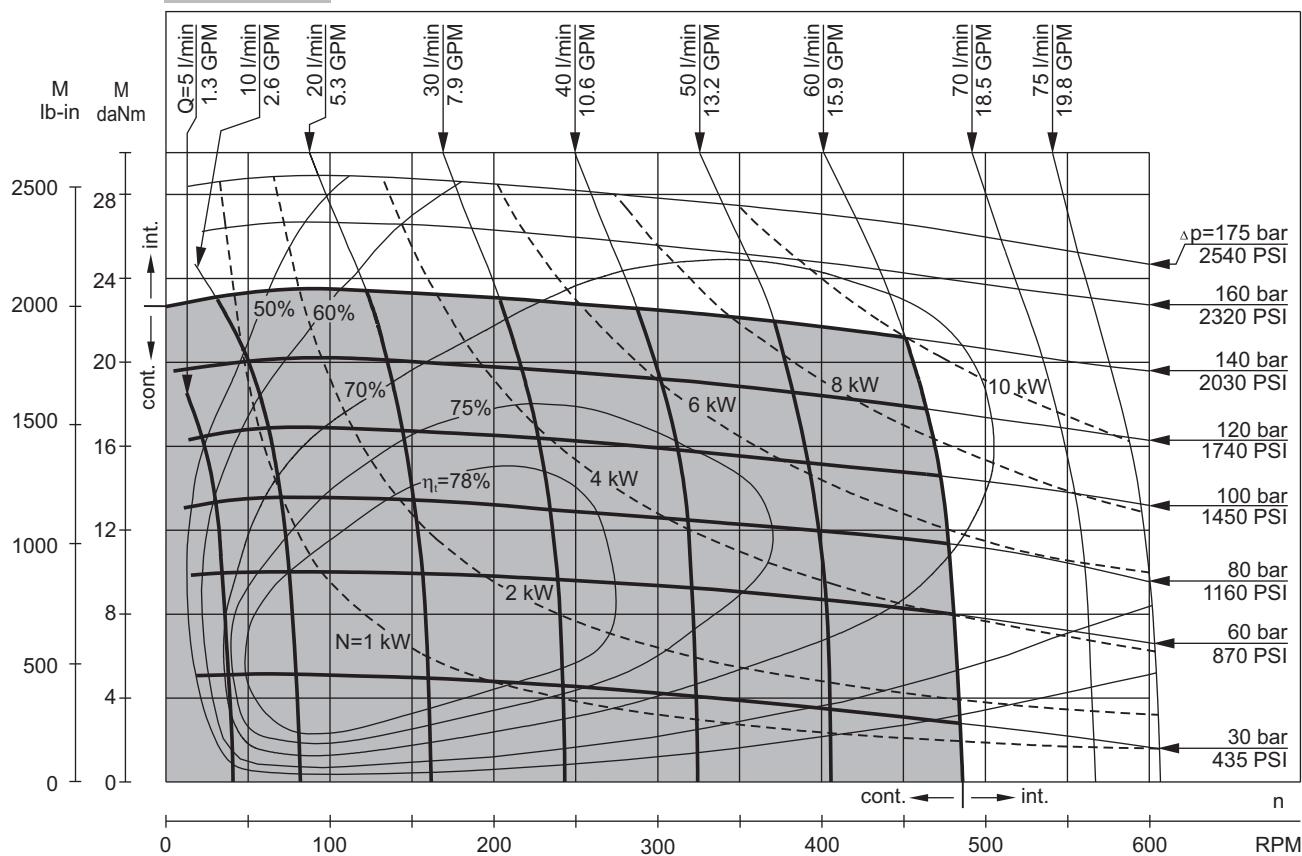


**MLHP 160**

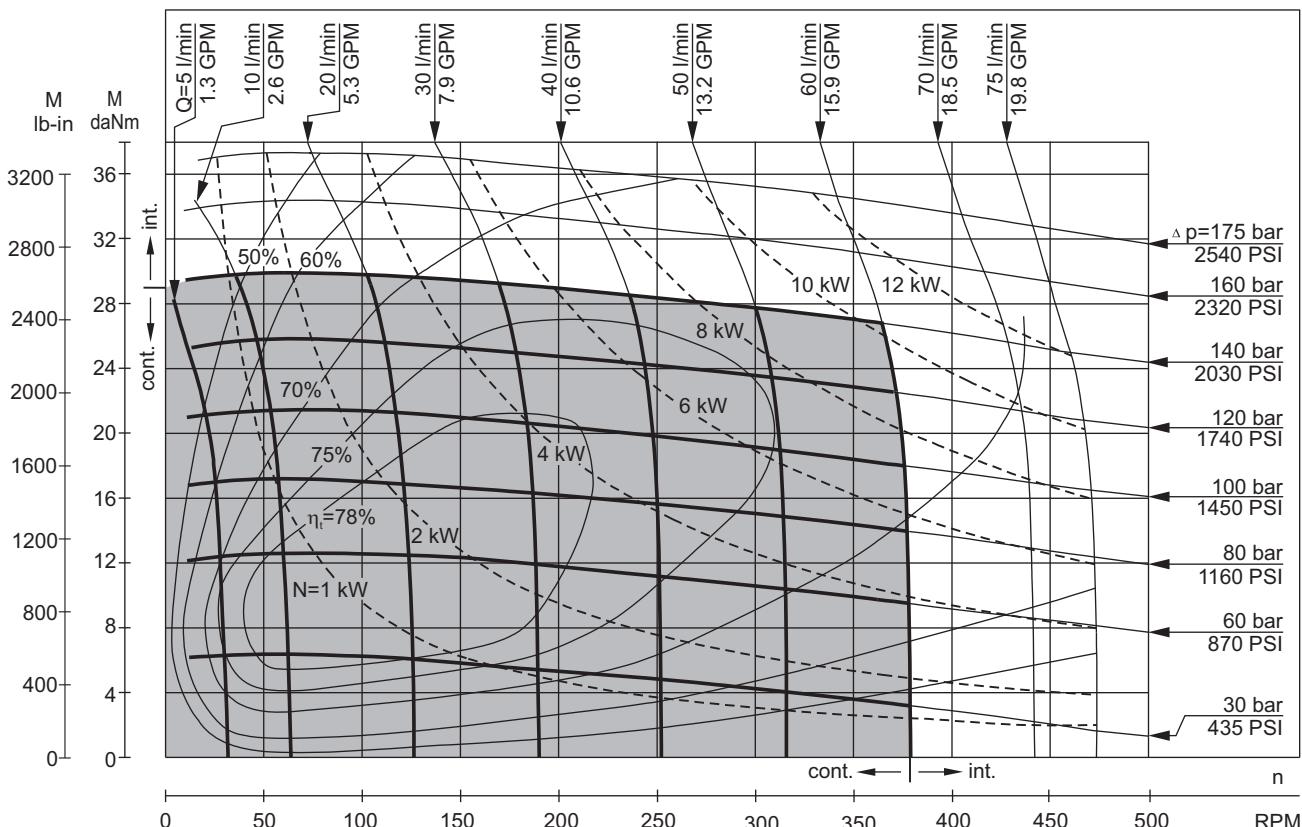


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI +145 PSI [5+10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHP 200**

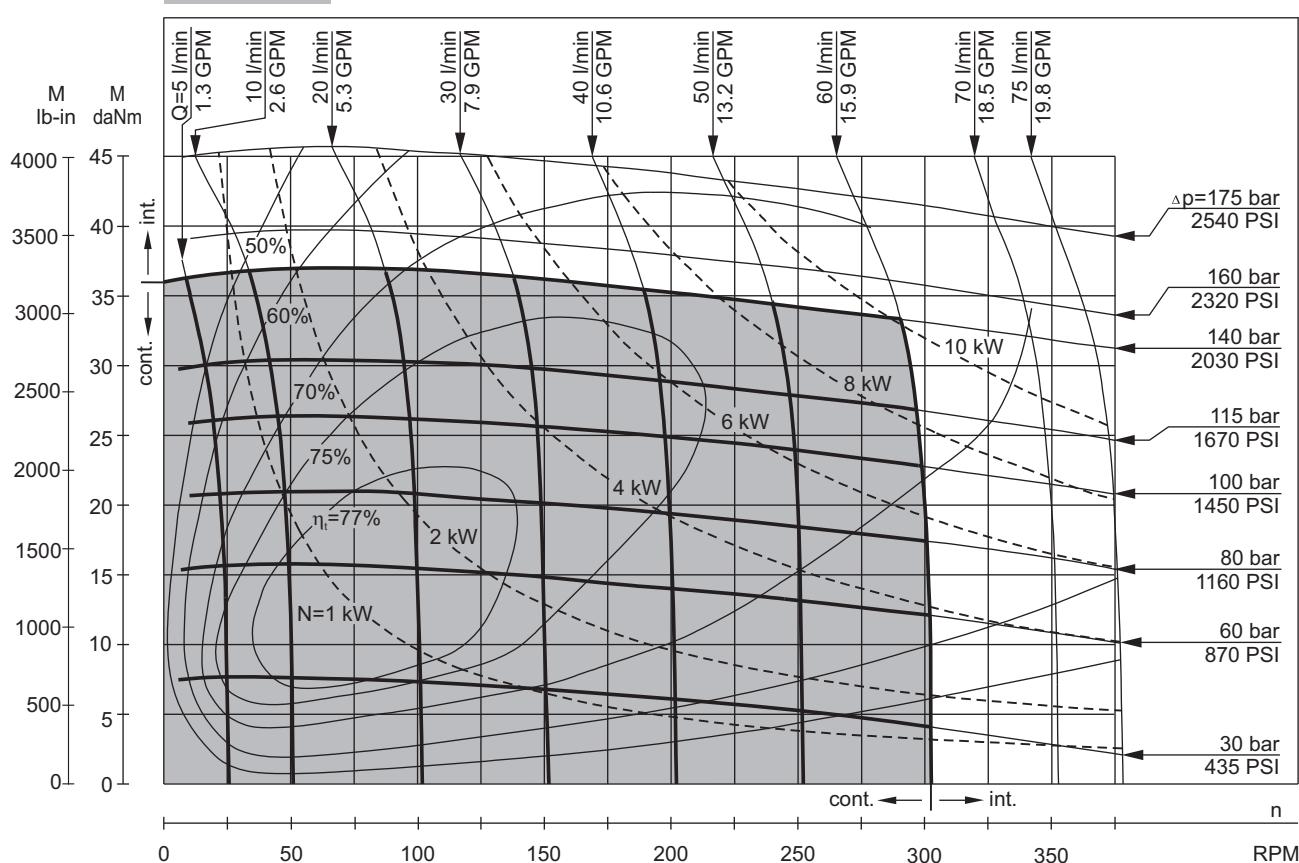


**MLHP 250**

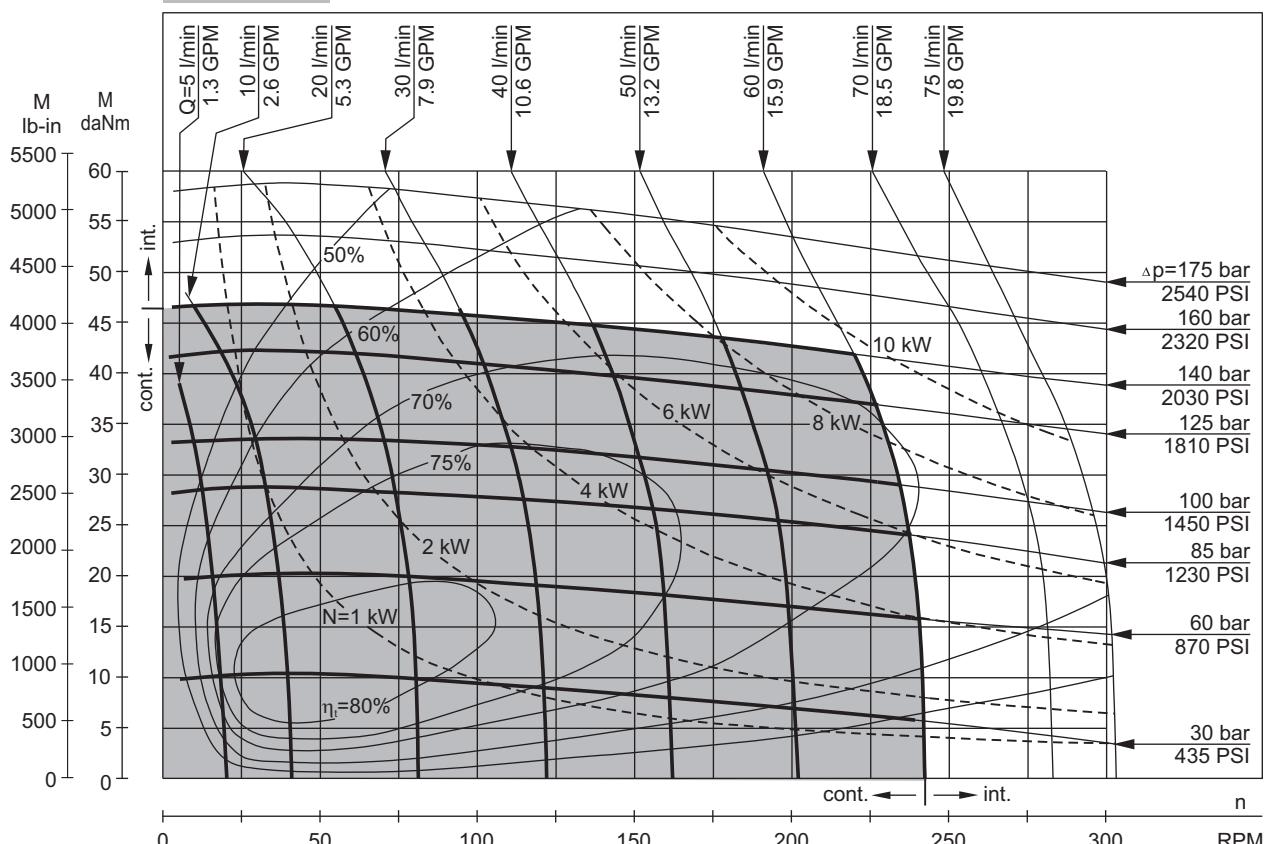


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI+145 PSI [5+10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHP 315**

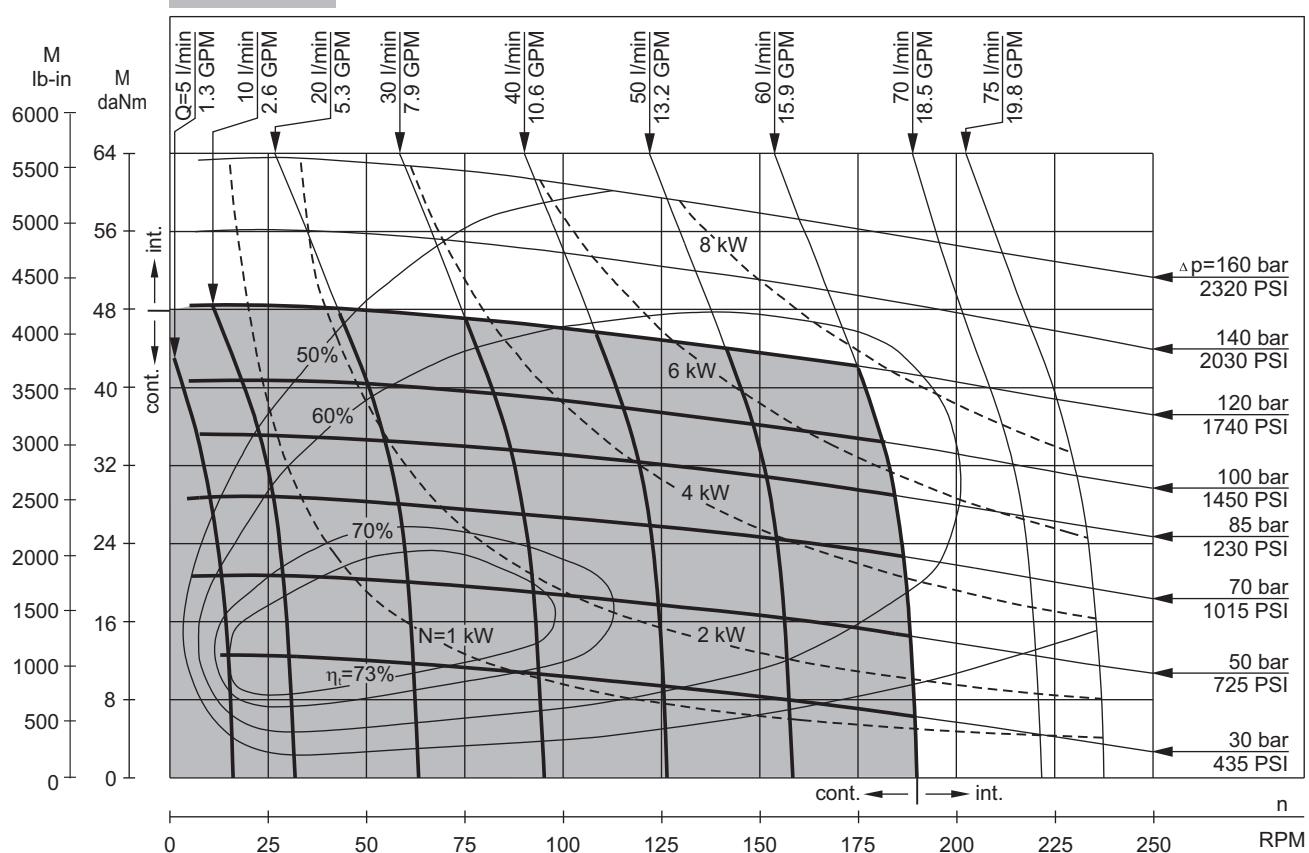


**MLHP 400**

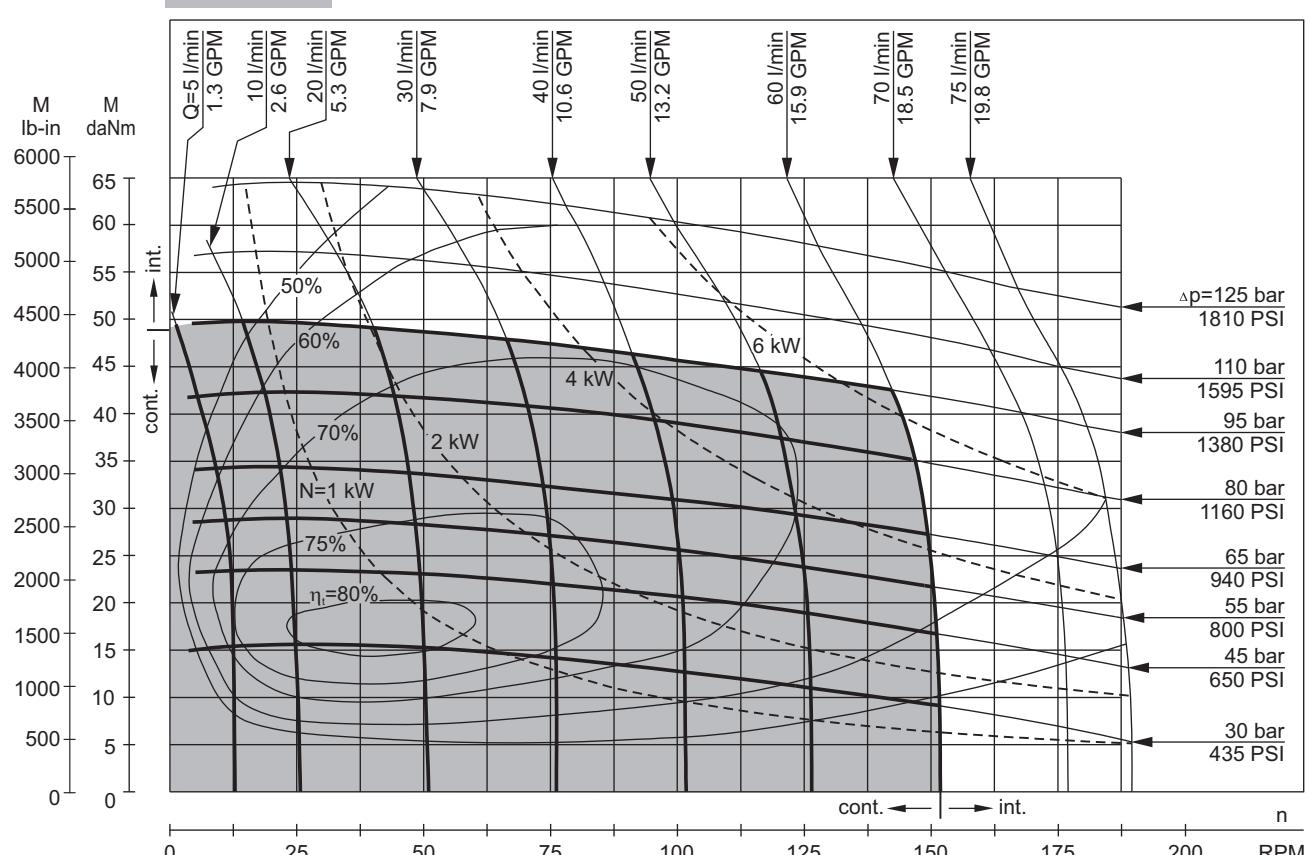


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI+145 PSI [5+10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHP 500**

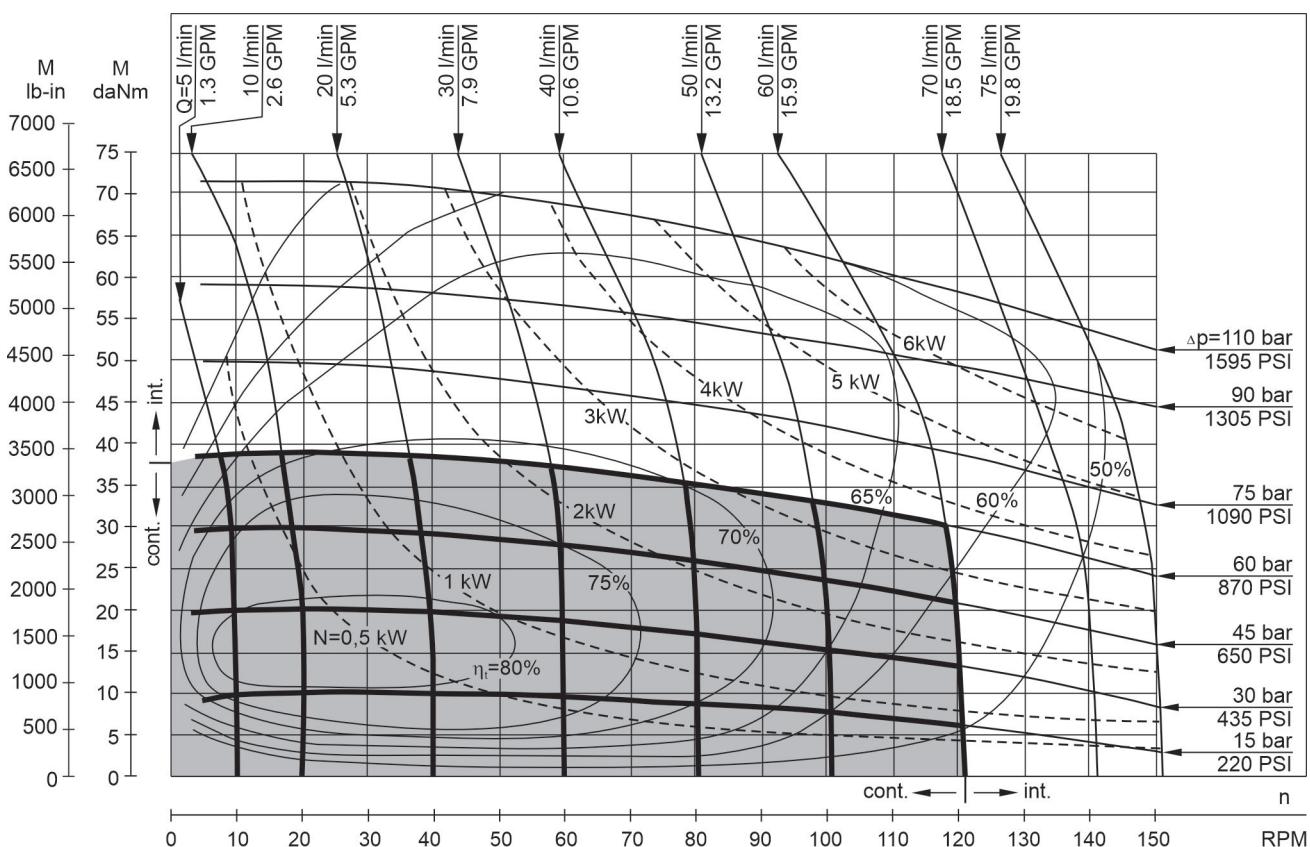


**MLHP 630**

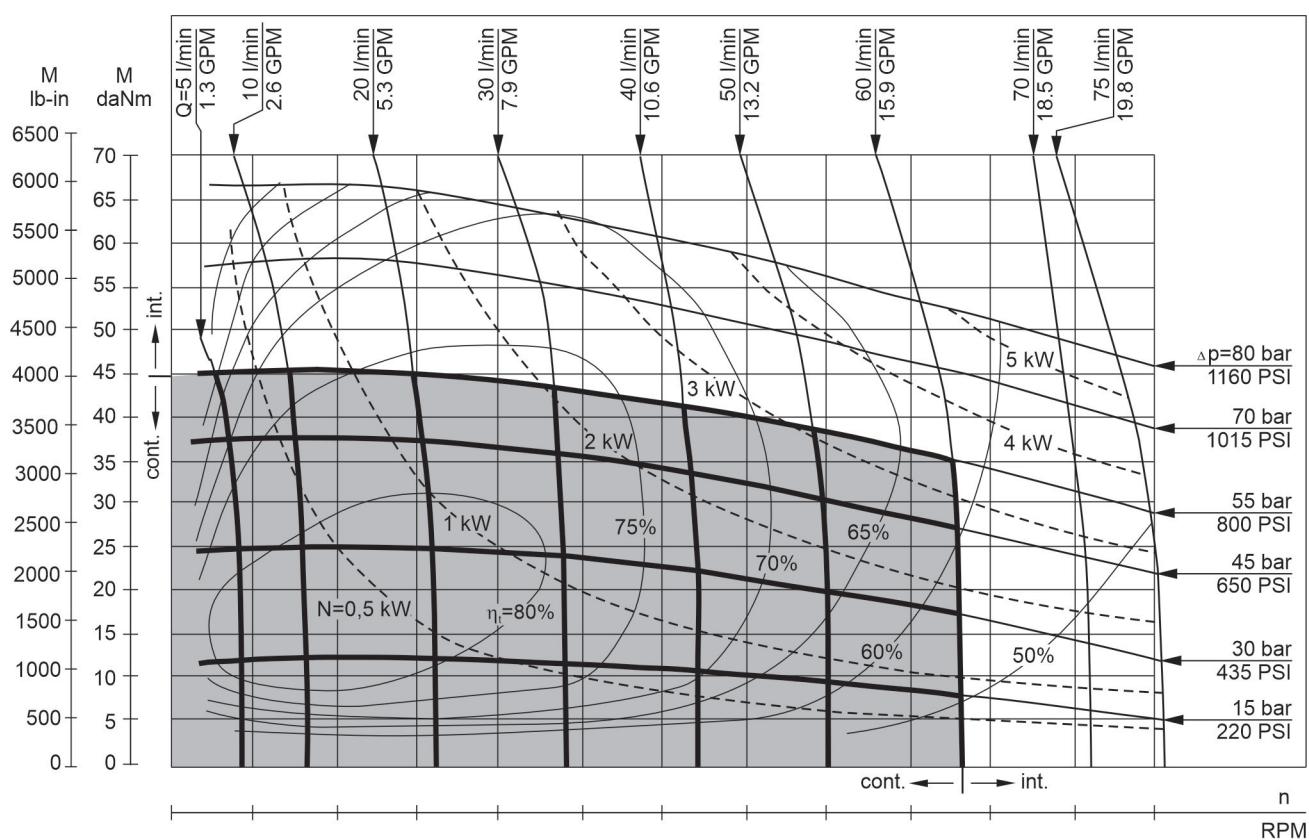


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI+145 PSI [5-10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

**DIMENSIONS and MOUNTING DATA**

**MLHP, MLHPF**

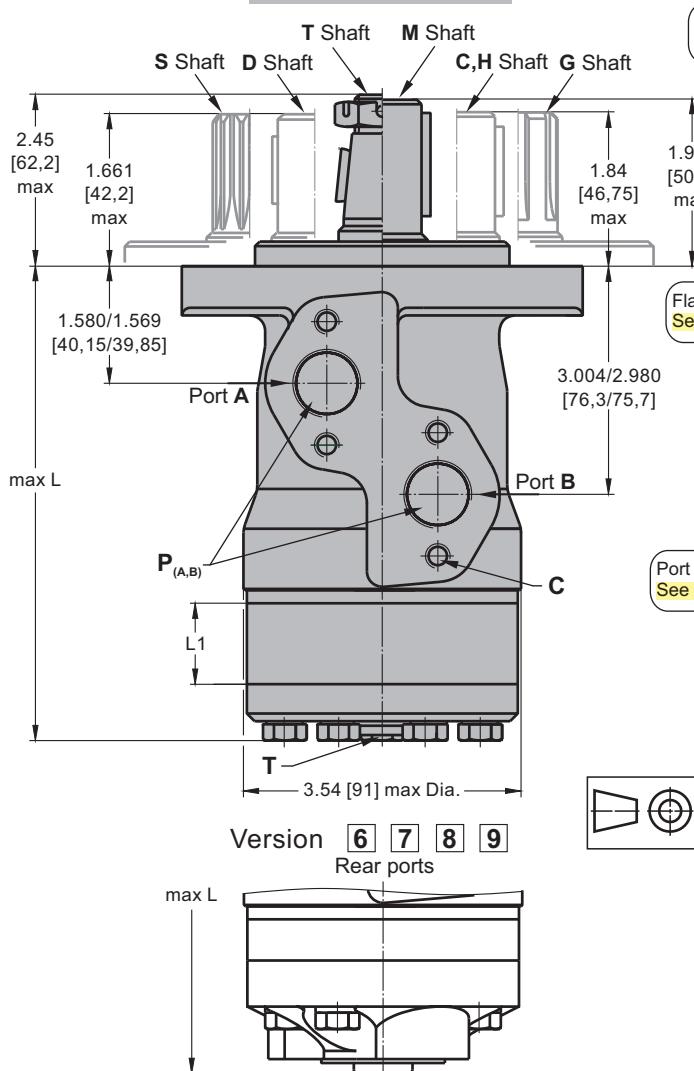

**MLHPQ, MLHPM**

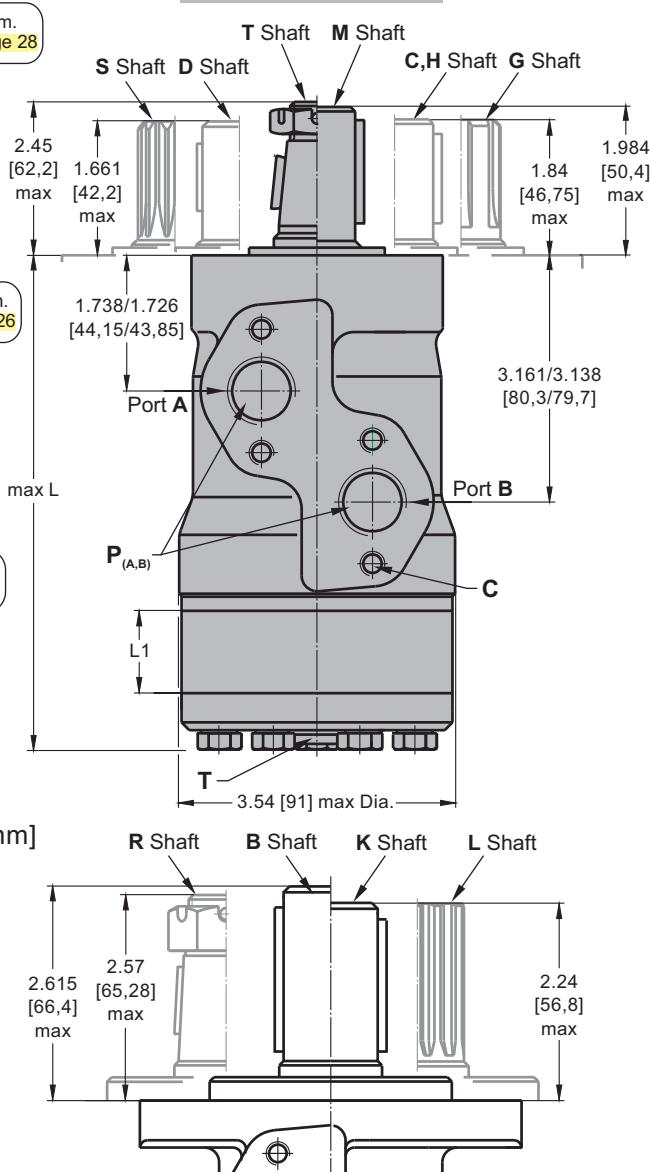

**Versions**

	<b>2, 6</b>	<b>3, 9</b>	<b>4, 7</b>	<b>5, 8</b>
<b>C</b>	4xM8	4xM8	4x 5/16 - 18 UNF	4x 5/16 - 18 UNF
<b>P<sub>(A,B)</sub></b>	2xG 1/2	2xM22x1,5	2x 7/8 - 14 UNF	2x 1/2 - 14 NPTF
<b>T</b>	G 1/4	M14x1,5	7/16 - 20 UNF	7/16 - 20 UNF

**Standard Rotation**

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

**Reverse Rotation**

Viewed from Shaft End




Port A Pressurized - CCW

Port B Pressurized - CW



<b>Type</b>	<b>L<sub>max</sub>, in [mm]</b>		<b>Type</b>	<b>L<sub>max</sub>, in [mm]</b>		<b>L<sub>1</sub>, in [mm]</b>
	<b>Versions 2,3,4,5</b>	<b>*Versions 6,7,8,9</b>		<b>Versions 2,3,4,5</b>	<b>*Versions 6,7,8,9</b>	
MLHP(F) 25	5.35 [136,0]	5.91 [150,0]	MLHPQ(M) 25	5.53 [140,5]	6.08 [154,5]	.21 [5,20]
MLHP(F) 32	5.39 [137,0]	5.96 [151,5]	MLHPQ(M) 32	5.57 [141,5]	6.12 [155,5]	.25 [6,30]
MLHP(F) 40	5.45 [138,5]	6.00 [152,5]	MLHPQ(M) 40	5.61 [142,5]	6.16 [156,5]	.29 [7,40]
MLHP(F) 50	5.41 [137,5]	5.96 [151,5]	MLHPQ(M) 50	5.59 [142,0]	6.14 [156,0]	.26 [6,67]
MLHP(F) 63	5.39 [137,0]	5.85 [148,5]	MLHPQ(M) 80	5.65 [143,5]	6.08 [154,5]	.33 [8,40]
MLHP(F) 80	5.57 [141,5]	6.12 [155,5]	MLHPQ(M) 80	5.75 [146,0]	6.29 [160,0]	.42 [10,67]
MLHP(F) 100	5.67 [144,0]	6.24 [158,5]	MLHPQ(M) 100	5.85 [148,5]	6.39 [162,5]	.52 [13,33]
MLHP(F) 125	5.81 [147,5]	6.36 [161,5]	MLHPQ(M) 125	5.98 [152,0]	6.54 [166,0]	.66 [16,67]
MLHP(F) 160	5.98 [152,0]	6.56 [166,5]	MLHPQ(M) 160	6.16 [156,5]	6.71 [170,5]	.84 [21,33]
MLHP(F) 200	6.20 [157,5]	6.75 [171,5]	MLHPQ(M) 200	6.38 [162,0]	6.93 [176,0]	1.05 [26,67]
MLHP(F) 250	6.46 [164,0]	7.03 [178,5]	MLHPQ(M) 250	6.63 [168,5]	7.19 [182,5]	1.31 [33,33]
MLHP(F) 315	6.83 [173,5]	7.38 [187,5]	MLHPQ(M) 315	7.01 [178,0]	7.56 [192,0]	1.68 [42,67]
MLHP(F) 400	7.24 [184,0]	7.81 [198,5]	MLHPQ(M) 400	7.42 [188,5]	7.97 [202,5]	2.10 [53,33]
MLHP(F) 500	7.78 [197,5]	8.33 [211,5]	MLHPQ(M) 500	7.95 [202,0]	8.50 [216,0]	2.62 [66,63]
MLHP(F) 630	8.47 [215,0]	9.02 [229,0]	MLHPQ(M) 630	8.62 [219,0]	9.17 [233,0]	3.31 [84,00]

\* - For Rear Ported Motors

**MOUNTING**

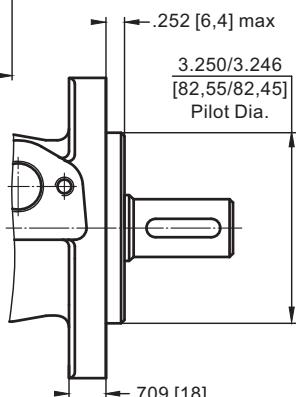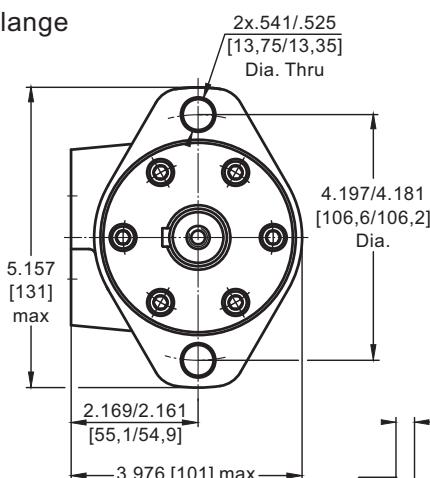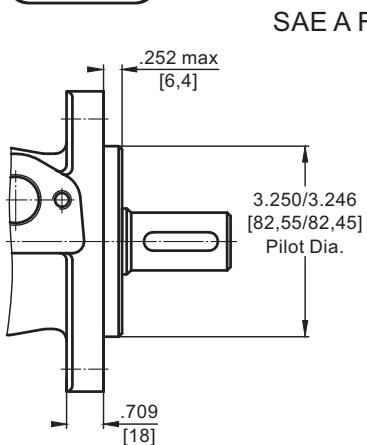

**F - Magneto Flange**

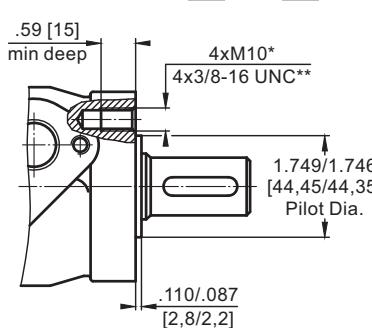


\* For M Flange  
\*\* For Q Flange

in [mm]

**PORTS**


**Side Ports**

Version **2** **3** **4** **5**

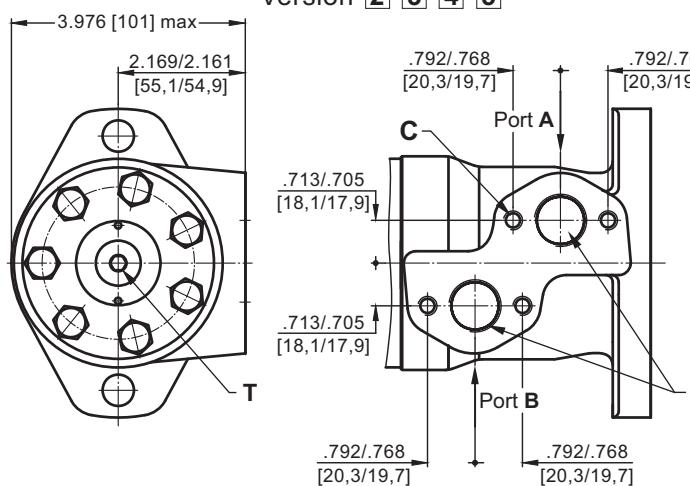

**Rear Ports**

Version **6** **7** **8** **9**

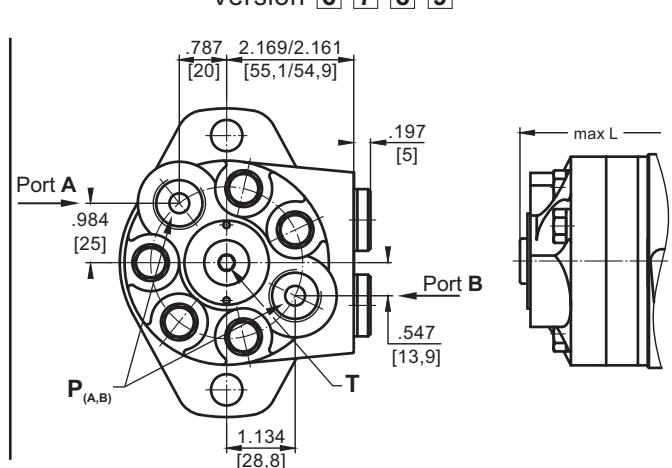


**Standard Rotation**  
Viewed from Shaft End  
Port A Pressurized - CW  
Port B Pressurized - CCW


**Reverse Rotation**  
Viewed from Shaft End  
Port A Pressurized - CCW  
Port B Pressurized - CW

	<b>Versions</b>			
	<b>2, 6</b>	<b>3, 9</b>	<b>4, 7</b>	<b>5, 8</b>
<b>C</b>	4xM8	4xM8	4x $\frac{5}{16}$ - 18 UNF	4x $\frac{5}{16}$ - 18 UNF
<b>P<sub>(A,B)</sub></b>	2xG $\frac{1}{2}$	2xM22x1,5	2x $\frac{7}{8}$ - 14 UNF	2x $\frac{1}{2}$ - 14 NPTF
<b>T</b>	G $\frac{1}{4}$	M14x1,5	$\frac{7}{16}$ - 20 UNF	$\frac{7}{16}$ - 20 UNF

## DIMENSIONS and MOUNTING DATA - MLHPW (WHEEL MOTOR)

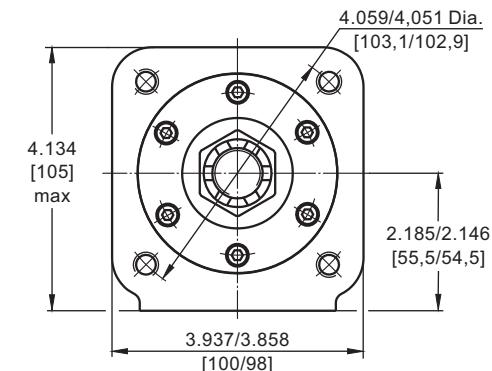

	Versions			
	2	3	4	5
C	4xM10	4xM10	3/8 - 16 UNF	3/8 - 16 UNF
P <sub>(A,B)</sub>	2xG1/2	2xM22x1,5	2x7/8 - 14 UNF	2x1/2 - 14 NPTF
T	G1/4	M14x1,5	7/16 - 20 UNF	7/16 - 20 UNF

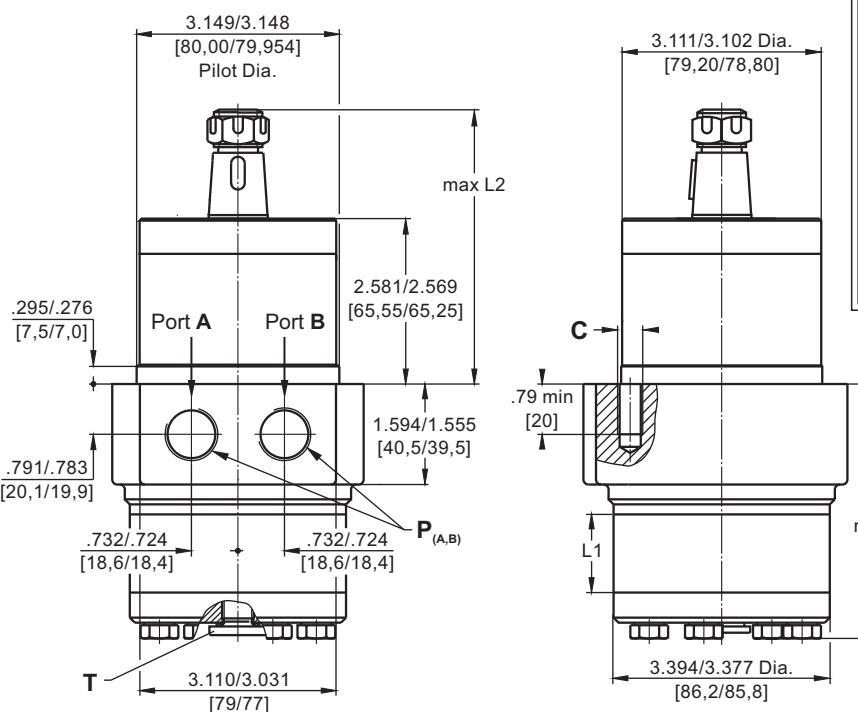

Type	L, in [mm]	L <sub>1</sub> , in [mm]
MLHPW(N) 25	3.01 [76,5]	.21 [5,20]
MLHPW(N) 32	3.07 [78,0]	.25 [6,30]
MLHPW(N) 40	3.13 [79,5]	.29 [7,40]
MLHPW(N) 50	3.07 [78,0]	.26 [6,67]
MLHPW(N) 80	3.23 [82,0]	.42 [10,67]
MLHPW(N) 100	3.35 [85,0]	.52 [13,33]
MLHPW(N) 125	3.47 [88,0]	.66 [16,67]
MLHPW(N) 160	3.66 [93,0]	.84 [21,33]
MLHPW(N) 200	3.86 [98,0]	1.05 [26,67]
MLHPW(N) 250	4.13 [105,0]	1.31 [33,33]
MLHPW(N) 315	4.51 [114,5]	1.68 [42,67]
MLHPW(N) 400	4.92 [125,0]	2.10 [53,33]

Shaft version	L <sub>2</sub> , in [mm]
C, G, H	4.17 [106]
S, D	3.99 [101,4]
M	4.32 [109,6]
T	4.78 [121,5]

**Standard Rotation**  
Viewed from Shaft End  
Port A Pressurized - CW  
Port B Pressurized - CCW


**Reverse Rotation**  
Viewed from Shaft End  
Port A Pressurized - CCW  
Port B Pressurized - CW

### PERMISSIBLE SHAFT LOADS

#### MLHPWN


The curves apply to a B10 bearing life of 2000 hours.

1. Max. radial shaft load
2. n= 50 RPM
3. n=200 RPM
4. n=800 RPM

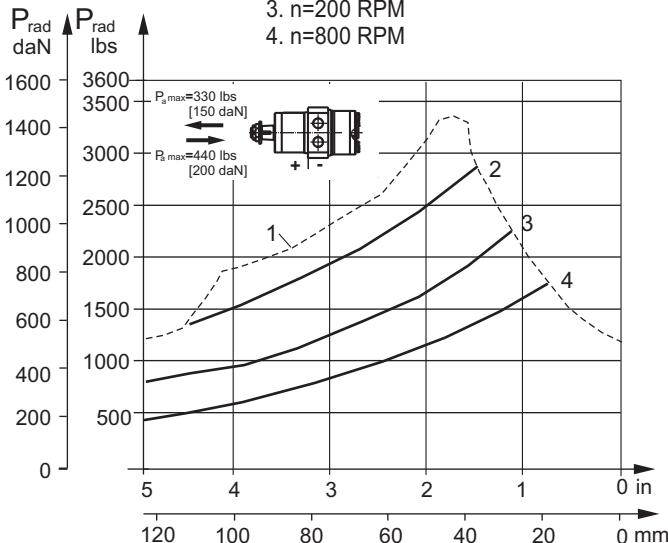

#### MLHPW

1. Max. radial shaft load
2. n=300 RPM
3. n=500 RPM
4. n=800 RPM

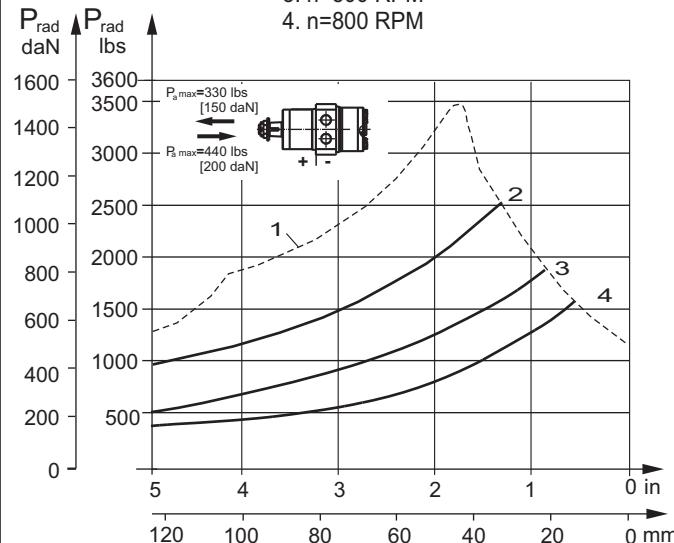


## SHAFT EXTENSIONS for MLHP and MLHR MOTORS


1.124 [28,56] sealing diameter

**C**


1" [25,4] straight, Parallel key  $\frac{1}{4}'' \times \frac{1}{4}'' \times 1\frac{1}{4}''$  BS 46  
Max. Torque 3009 lb-in [34 daNm]

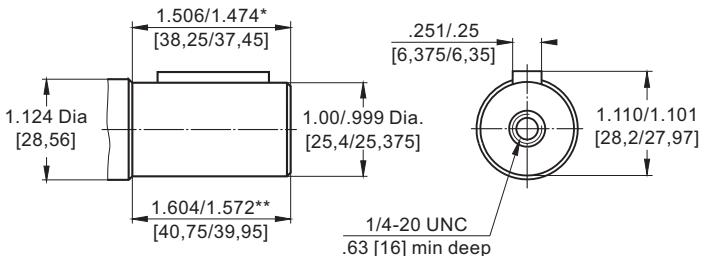**D**


$\frac{7}{8}$ " [22,2] straight, Parallel key  $\frac{1}{4}'' \times \frac{1}{4}'' \times 1''$  BS 46  
Max. Torque 3200 lb-in [36 daNm]

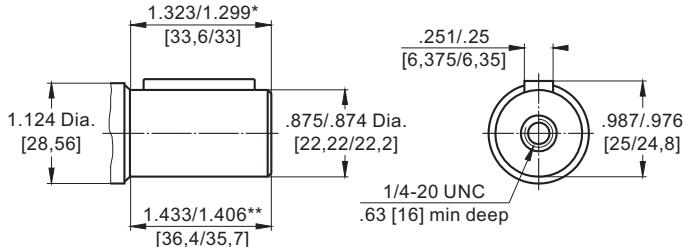**G**


1" [25,4], SAE 6B Splined  
Max. Torque 3540 lb-in [40 daNm]

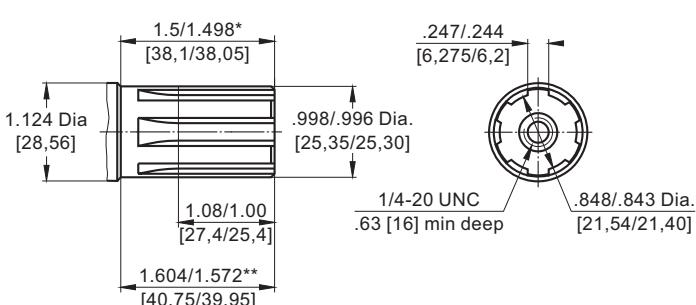**H**


1" [25,4] straight, w/ .406 [10,3] Crosshole  
Max. Torque 3009 lb-in [34 daNm]

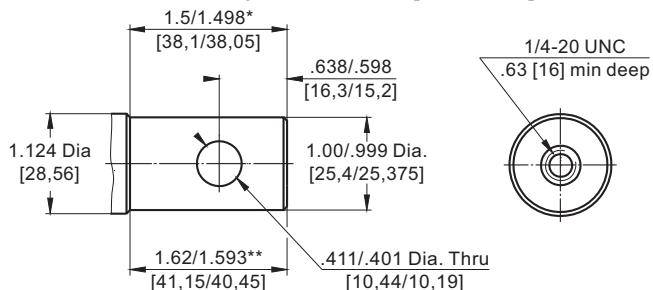**M**



$\varnothing 25$  straight, Parallel key A8x7x32 DIN 6885  
Max. Torque 3009 lb-in [34 daNm]

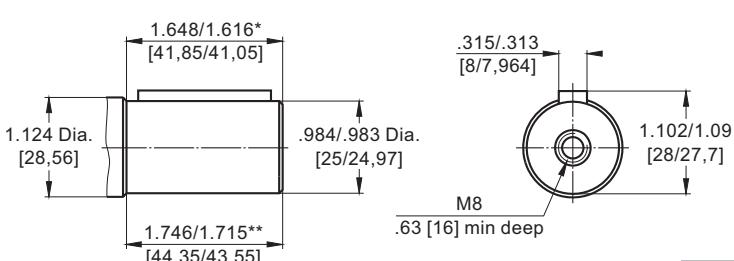**S**

13 T Splined,  $\frac{7}{8}$ " [22,2], ANS B 92.1-1976  
Max. Torque 3200 lb-in [36 daNm]

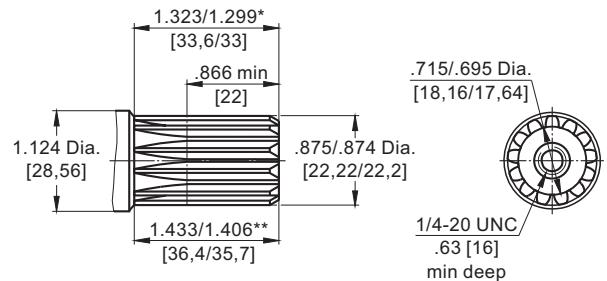**T**

1" [25,4], SAE J501 Tapered  
Woodruff key  $\frac{1}{4}'' \times 1''$  SAE J502  
Max. Torque 3540 lb-in [40 daNm]

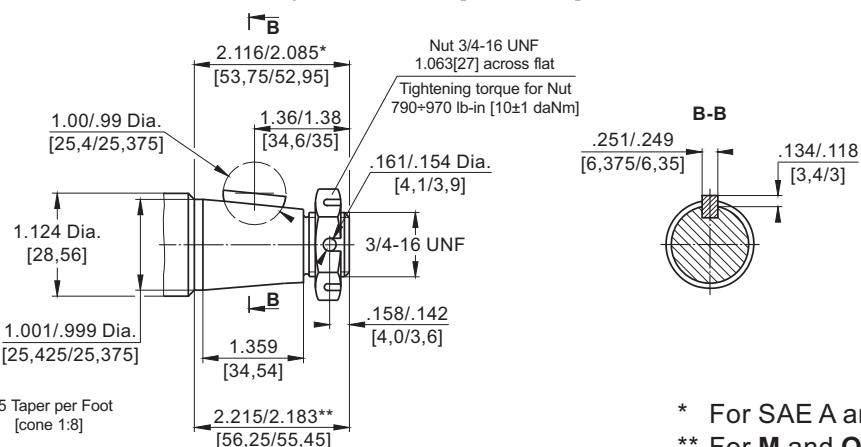

in [mm]

\* For SAE A and F Flange  
\*\* For M and Q Flange


Requirement max. Torque must not be exceeded.

## SHAFT EXTENSIONS for MLHP and MLHR MOTORS (continued)


1.378 [35] sealing diameter

**B**


$\varnothing 32$  straight, Parallel key A10x8x45 DIN 6885  
Max. Torque 6815 lb-in [77 daNm]

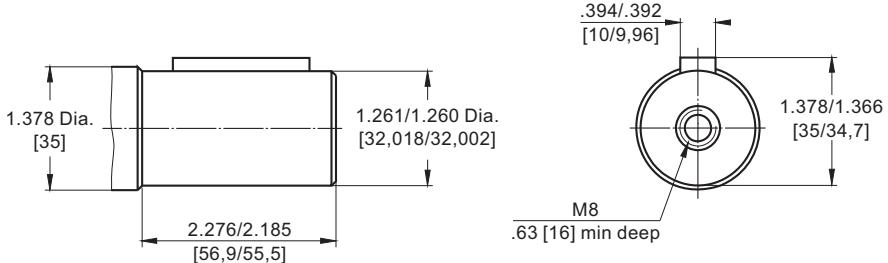**K**



$1\frac{1}{4}$  [31,75] straight, Parallel key  $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{4}$  BS 46  
Max. Torque 6815 lb-in [77 daNm]

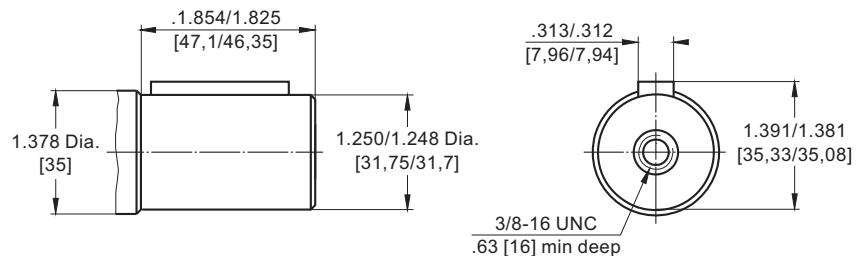**L**

14T Splined,  $1\frac{1}{4}$  [31,75], ANS B 92.1-1976  
Max. Torque 6815 lb-in [77 daNm]

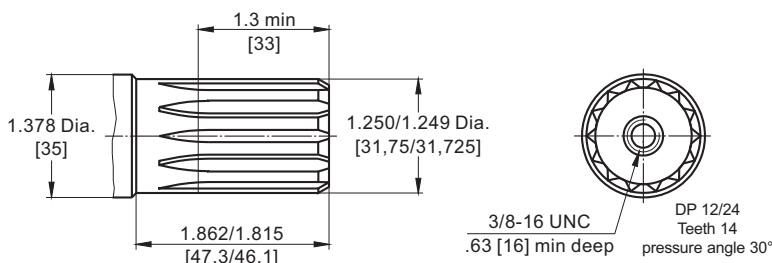**R**

$1\frac{1}{4}$  [31,75], SAE J501 Tapered, Parallel key  $\frac{5}{16}'' \times \frac{5}{16}'' \times 1''$   
Max. Torque 6815 lb-in [77 daNm]

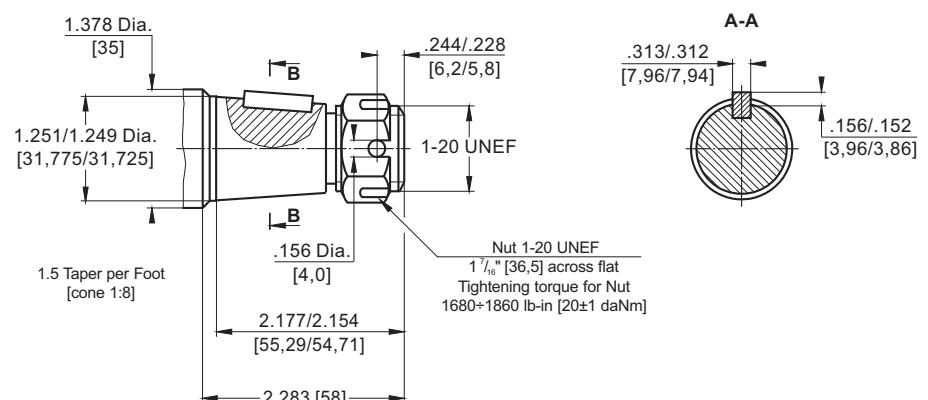 in [mm]


Requirement max. Torque must not be exceeded.

## PERMISSIBLE SHAFT LOADS for MLHP and MLHR MOTORS

The permissible radial shaft load  $P_{rad}$  depends on the speed  $n$ , RPM, mounting flange, distance  $L$  from the point of load to the mounting flange and shaft version.



<b>Mounting Flange</b>			
<b>Shaft Version</b>	Keyed C Splined G	Keyed B Splined L	Keyed C Splined G
<b>Radial Shaft Load <math>P_{rad}</math>, in mm</b>	$\frac{800}{n} \times \frac{25000}{95+L}$ , daN*	$\frac{800}{n} \times \frac{18750}{95+L}$ , daN*	$\frac{800}{n} \times \frac{25000}{101+L}$ , daN*
<b>Radial Shaft Load <math>P_{rad}</math>, in inch</b>	$\frac{800}{RPM} \times \frac{2215}{3.74+L}$ , lbs*	$\frac{800}{RPM} \times \frac{1660}{3.74+L}$ , lbs*	$\frac{800}{RPM} \times \frac{2215}{3.98+L}$ , lbs*

\*  $n < 200$  RPM; max  $P_{rad}=1800$  lbs [800 daN]


$n \geq 200$  RPM;  $L < 2.2$  in [55 mm]

### MLHP and MLHR

Radial Shaft Load  $P_{rad}$  for C, G Shaft Extensions by  $L=1.18$  in [30 mm] (.94 in [24 mm])

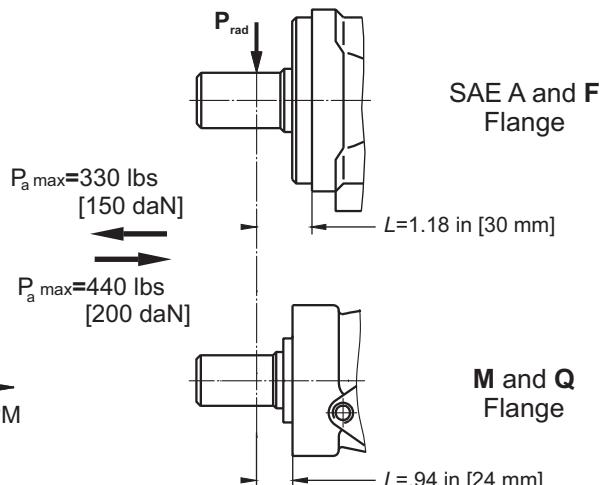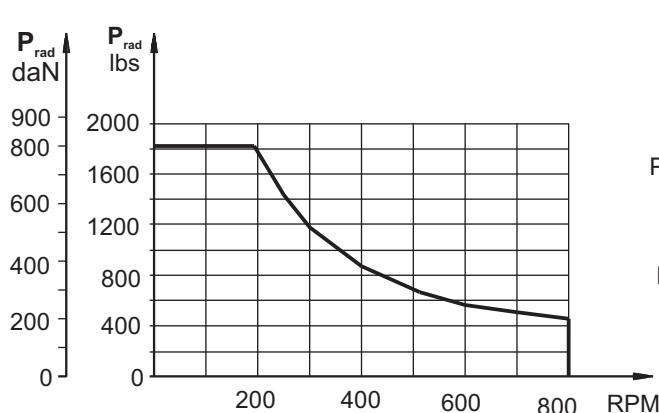

### MLHPN and MLHRN

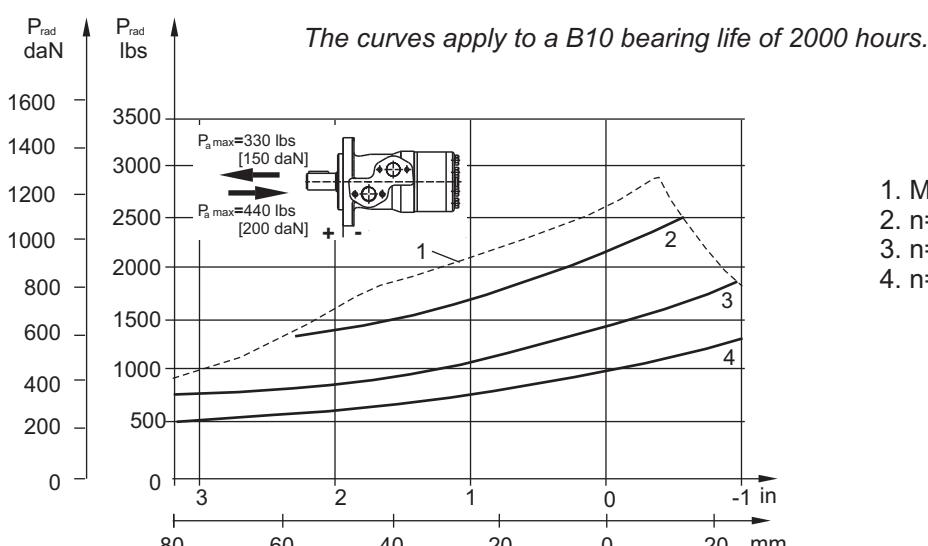

1. Max. radial shaft load
2.  $n= 50$  RPM
3.  $n=200$  RPM
4.  $n=800$  RPM




## MAX. PERMISSIBLE SHAFT SEAL PRESSURE for MLHP and MLHR MOTORS

**MLHP/MLHR...U1 motors  
with high pressure seal  
and without drain connection:**


The shaft seal pressure equals the average of input pressure and return pressure.

$$P_{\text{seal}} = \frac{P_{\text{input}} + P_{\text{return}}}{2}$$




**MLHP/MLHR...U motors  
with high pressure seal  
and with drain connection:**

The shaft seal pressure equals the pressure in the drain line.





**MLHP/MLHR...1 motors  
with standard shaft seal  
and without drain connection:**

The shaft seal pressure never exceeds the pressure in the return line.



**MLHP/MLHR... motors  
with standard shaft seal  
and with drain connection:**

The shaft seal pressure equals the pressure in the drain line.

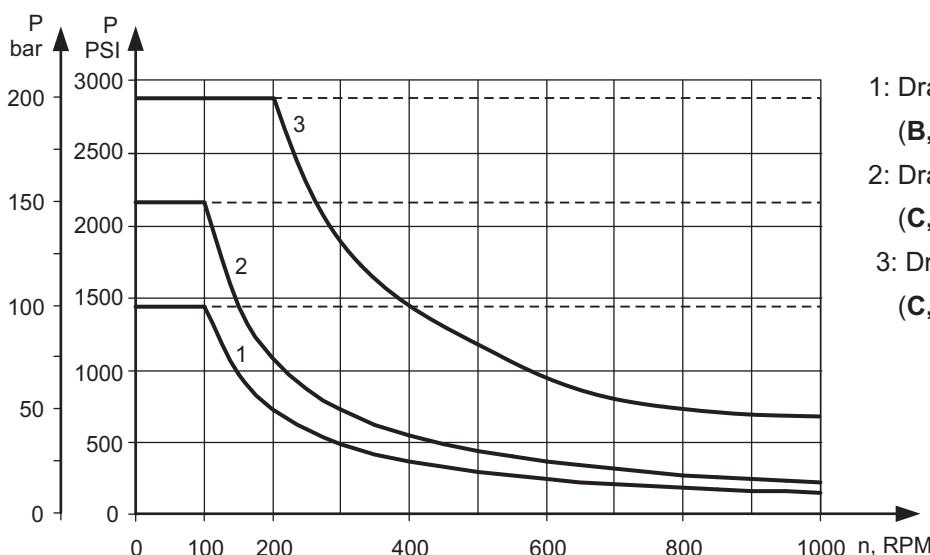

- 1: Drawing for Standard Shaft Seal (B, K, L, R shafts)
- 2: Drawing for Standard Shaft Seal (C, G, D, H, M, S, T shafts)
- 3: Drawing for High Pressure Seal ("U" Seal) (C, G, D, H, M, S, T shafts)

— - continuous operations  
- - - - - intermittent operations

## ORDER CODE

1    2    3    4    5    6    7    8    9

M L H P								
---------	--	--	--	--	--	--	--	--

**Pos.1 - Mounting Flange**

omit - SAE A, two holes

**F** - Magneto, six holes

**M** - Square metric, four bolts M10

**Q** - Square, four bolts

**W** - Wheel motor

**Pos.2 - Displacement code**

**25\*** - 1.73 in<sup>3</sup>/rev [ 28,4 cm<sup>3</sup>/rev]

**32\*** - 2.11 in<sup>3</sup>/rev [ 34,5 cm<sup>3</sup>/rev]

**40\*** - 2.47 in<sup>3</sup>/rev [ 40,5 cm<sup>3</sup>/rev]

**50** - 3.02 in<sup>3</sup>/rev [ 49,5 cm<sup>3</sup>/rev]

**63\*\*** - 3.80 in<sup>3</sup>/rev [ 62,3 cm<sup>3</sup>/rev]

**80** - 4.83 in<sup>3</sup>/rev [ 79,2 cm<sup>3</sup>/rev]

**100** - 6.04 in<sup>3</sup>/rev [ 99,0 cm<sup>3</sup>/rev]

**125** - 7.55 in<sup>3</sup>/rev [123,8 cm<sup>3</sup>/rev]

**160** - 9.66 in<sup>3</sup>/rev [158,4 cm<sup>3</sup>/rev]

**200** - 12.10 in<sup>3</sup>/rev [198,0 cm<sup>3</sup>/rev]

**250** - 15.10 in<sup>3</sup>/rev [247,5 cm<sup>3</sup>/rev]

**315** - 19.30 in<sup>3</sup>/rev [316,8 cm<sup>3</sup>/rev]

**400** - 24.16 in<sup>3</sup>/rev [396,0 cm<sup>3</sup>/rev]

**500** - 30.20 in<sup>3</sup>/rev [495,0 cm<sup>3</sup>/rev]

**630** - 38.05 in<sup>3</sup>/rev [623,6 cm<sup>3</sup>/rev]

**Pos.3 - Shaft Extensions\*\*\* [see pages 28 and 29]**

**C** - 1" [25,4] straight, Parallel key

**VC** - 1" [25,4] straight, Parallel key w/ corrosion  
resistant bushing

**D** - 7/8" [22,2] straight, Parallel key

**G** - 1" [25,4] SAE 6B Splined

**H** - 1" [25,4] straight w/ .406 [10,3] Crosshole

**M** - 25 mm straight, Parallel key

**VM** - 25 mm straight, Parallel key w/ corrosion  
resistant bushing

**S** - 7/8" [22,2] 13T Splined

**T** - 1" [25,4] SAE J501 Tapered

**B** - 32 mm straight, Parallel key

**K** - 1 1/4" [31,75] straight, Parallel key

**L** - 1 1/4" [31,75] 14T Splined

**R** - 1 1/4" [31,75] SAE J501 Tapered

**NOTES:** \* Not with Low Pressure Seal.

\*\* 63 displacement code is not for MLHPW!

\*\*\* The permissible output torque for shafts must not be exceeded.

The following combinations are not allowed: - **Q, M, W** flange with **B, K, L, R** shafts;

- **N** option with **B, K, L, R** shafts, **U** option or **RS** option;

- **W** flange with rear ports;

- **B, K, L, R** shafts with **U** option.


Displacement codes 25, 32, 40, 50 and 63 are not allowed with **B, K, L, R** shafts!

# HYDRAULIC MOTORS MLHR



## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Grass cutting machinery etc.



## CONTENTS

Specification data .....	34÷35
Function diagrams .....	36÷40
Dimensions and mounting .....	41÷42
Shaft extensions .....	28÷29
Permissible shaft loads .....	30
Permissible shaft seal pressure ....	31
Order code .....	43

## OPTIONS

- » Model - Spool valve, roll-gerotor
- » Flange mount
- » Motor with needle bearing
- » Side and rear ports
- » Shafts - straight, splined and tapered
- » SAE, Metric and BSPP ports
- » Speed sensoring
- » Other special features


## GENERAL

<b>Max. Displacement,</b> in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	24.4 [397]
<b>Max. Speed,</b> [RPM]	970
<b>Max. Torque,</b> lb-in [daNm]	cont.: 5400 [61] int.: 6100 [69]
<b>Max. Output,</b> HP [kW]	20.1 [15]
<b>Max. Pressure Drop,</b> PSI [bar]	cont.: 2540 [175] int.: 2900 [200]
<b>Max. Oil Flow,</b> GPM [lpm]	19.8 [75]
<b>Min. Speed,</b> [RPM]	10
<b>Pressure fluid</b>	Mineral based - HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °F [°C]	-40 ÷ 284 [-40 ÷ 140]
<b>Optimal Viscosity range,</b> SUS [mm <sup>2</sup> /s]	98 ÷ 347 [20 ÷ 75]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure drop PSI [bar]	Viscosity SUS [mm <sup>2</sup> /s]	Oil flow in drain line GPM [lpm]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]

Pressure Losses

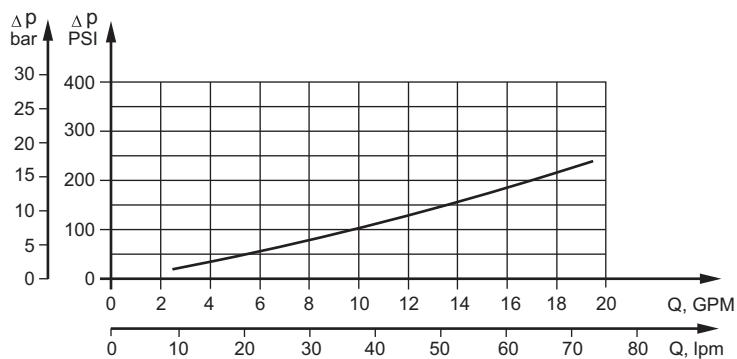

## SPECIFICATION DATA

Specification Data for MLHR... motors with **C, D, G, H, M, S** and **T** shafts.

(1.124 [28,56] sealing diameter)

Type	MLHR 50	MLHR 80	MLHR 100	MLHR 125	MLHR 160	MLHR 200	MLHR 250	MLHR 315	MLHR 400
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	3.14 [51,5]	4.90 [80,3]	6.09 [99,8]	7.67 [125,7]	9.74 [159,6]	12.19 [199,8]	15.26 [250,1]	19.26 [315,7]	24.4 [397]
<b>Max. Speed, [RPM]</b>	Cont. Int.*	775 970	750 940	600 750	475 600	375 470	300 375	240 300	190 240
<b>Max. Torque, lb-in [daNm]</b>	Cont. Int.* Peak**	900 [10,1] 1150 [13]	1725 [19,5] 1947 [22]	2125 [24] 2480 [28]	2655 [30] 3010 [34]	3450 [39] 3805 [43]	3410 [38,5] 4070 [46]	3450 [39] 5150 [58]	3450 [39] 5045 [57]
<b>Max. Output, HP [kW]</b>	Cont. Int.*	9.5 [7] 11.9 [8,5]	17 [12,5] 20.1 [15]	17.4 [13] 20.1 [15]	16.8 [12,5] 19.5 [14,5]	15.4 [11,5] 18.8 [14]	12 [9] 15.4 [11,5]	8.7 [6,5] 14.1 [10,5]	8 [6] 12.9 [9,6]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont. Int.* Peak**	2030 [140] 2540 [175]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2030 [140] 2540 [175]	1600 [110] 2540 [175]	1300 [90] 2030 [140]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont. Int.*	10.5 [40] 13.2 [50]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]
<b>Max. Return Pres- sure with Drain Line, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	145 [10]	130 [9]	102 [7]	73 [5]	58 [4]	44 [3]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont. At max.press. drop Int.*	710 [8]	1330 [15]	1770 [20]	2215 [25]	2832 [32]	2920 [33]	2740 [31]	2920 [33]
<b>Min. Speed***, [RPM]</b>		10	10	10	10	10	10	10	10
<b>Weight, lb [kg]</b>	MLHR(F)(N) For rear ports +1.433 [0,650]	15 [6,8]	15,2 [6,9]	15.9 [7,2]	16.1 [7,3]	15.2 [7,5]	17.6 [8]	18.5 [8,4]	20 [9,1]
	MLHRQ(M)(N)	13.7 [6,2]	13.9 [6,3]	14.6 [6,6]	15 [6,8]	15 [6,8]	14.7 [7,2]	17.2 [7,8]	19 [8,6]
									20.5 [9,3]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## SPECIFICATION DATA (continued)

Specification Data for MLHR... motors with **B, K, R** and **L** shafts.

(1.378 [35] sealing diameter)

Type	MLHR 50	MLHR 80	MLHR 100	MLHR 125	MLHR 160	MLHR 200	MLHR 250	MLHR 315	MLHR 400
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	3.14 [51,5]	4.90 [80,3]	6.09 [99,8]	7.67 [125,7]	9.74 [159,6]	12.19 [199,8]	15.26 [250,1]	19.26 [315,7]	24.4 [397]
<b>Max. Speed, [RPM]</b>	Cont. Int.*	775 970	750 940	600 750	475 600	375 470	300 375	240 300	190 240
<b>Max. Torque, lb-in [daNm]</b>	Cont. Int.* Peak**	900 [10,1] 1150 [13]	1725 [19,5] 1947 [22]	2125 [24] 2480 [28]	2655 [30] 3010 [34]	3450 [39] 3805 [43]	4000 [45] 4425 [50]	4780 [54] 5400 [61]	4870 [55] 5580 [63]
<b>Max. Output, HP [kW]</b>	Cont. Int.*	9.5 [7] 11.9 [8,5]	17 [12,5] 20.1 [15]	17.4 [13] 20.1 [15]	16.8 [12,5] 19.5 [14,5]	15.4 [11,5] 18.8 [14]	14.8 [11] 17.4 [13]	13.4 [10] 16.1 [12]	12 [9] 14.8 [11]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont. Int.* Peak**	2030 [140] 2540 [175]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	1960 [135] 2320 [160]	1670 [115] 2030 [140]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont. Int.*	10.5 [40] 13.2 [50]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]	15.8 [60] 19.8 [75]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]
<b>Max. Return Pres- sure with Drain Line, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]	2540 [175] 2900 [200]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	145 [10]	130 [9]	102 [7]	73 [5]	58 [4]	44 [3]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont. At max.press. drop Int.*	710 [8] 885 [10]	1330 [15] 1505 [17]	1770 [20] 2035 [23]	2215 [25] 2480 [28]	2832 [32] 3275 [37]	3630 [41] 4070 [46]	4000 [45] 4870 [55]	4000 [45] 5840 [66]
<b>Min. Speed***, [RPM]</b>		10	10	10	10	10	10	10	10
<b>Weight, lb [kg]</b>		15.2 [6,9]	15.4 [7]	16.1 [7,3]	16.3 [7,4]	15.4 [7,6]	18.9 [8,1]	18.7 [8,5]	20.3 [9,2]
<b>For rear ports +1.433 [0,650]</b>									21.8 [9,9]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## FUNCTION DIAGRAMS

**MLHR 50**

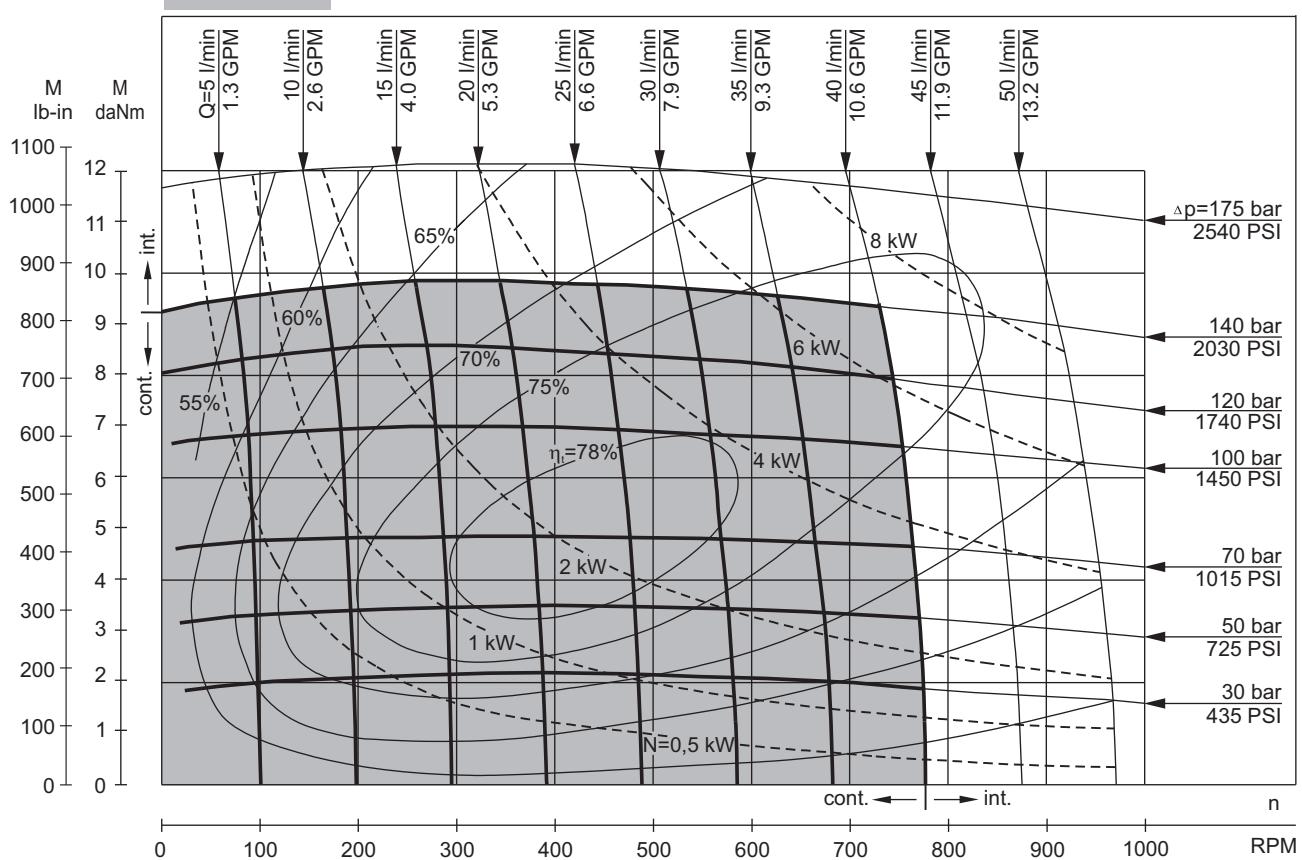


**MLHR 80**

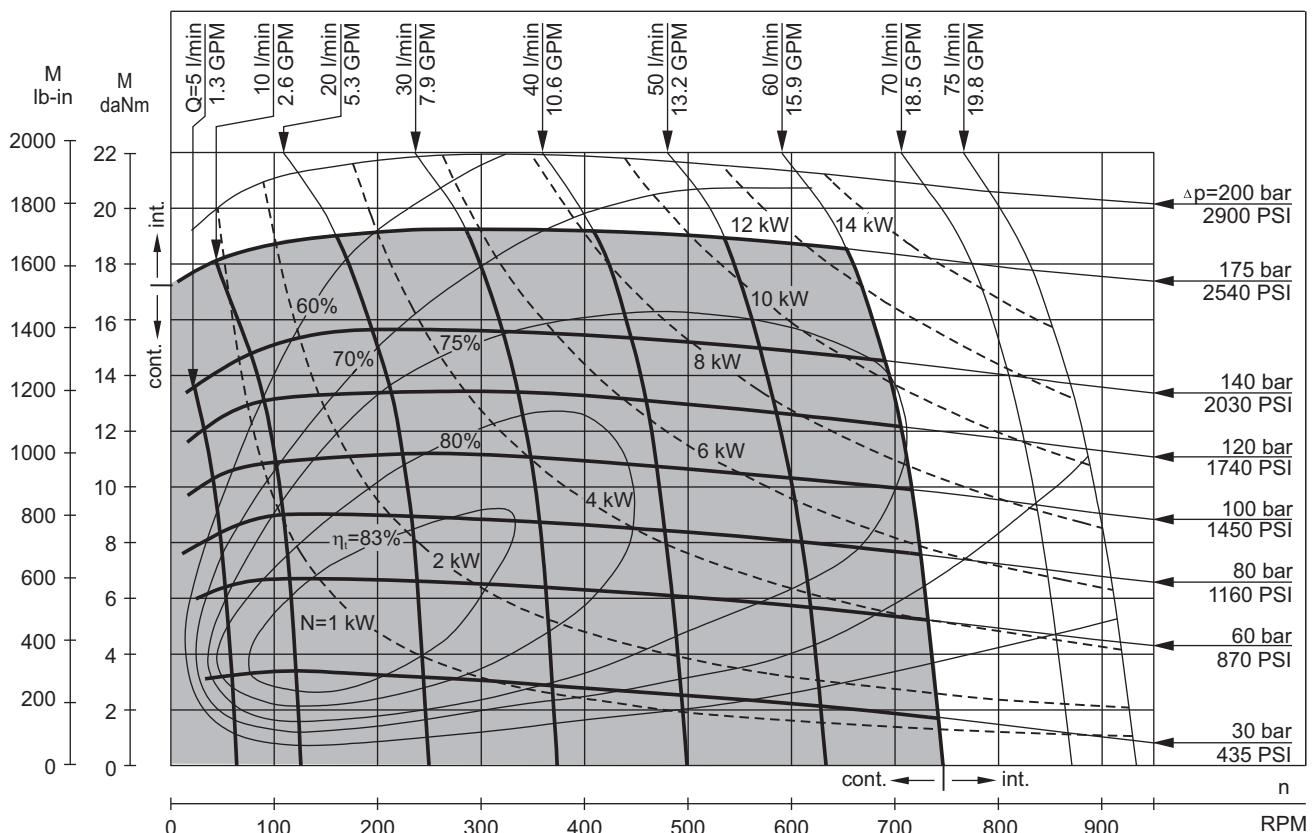


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI+145 PSI [5-10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHR 100**

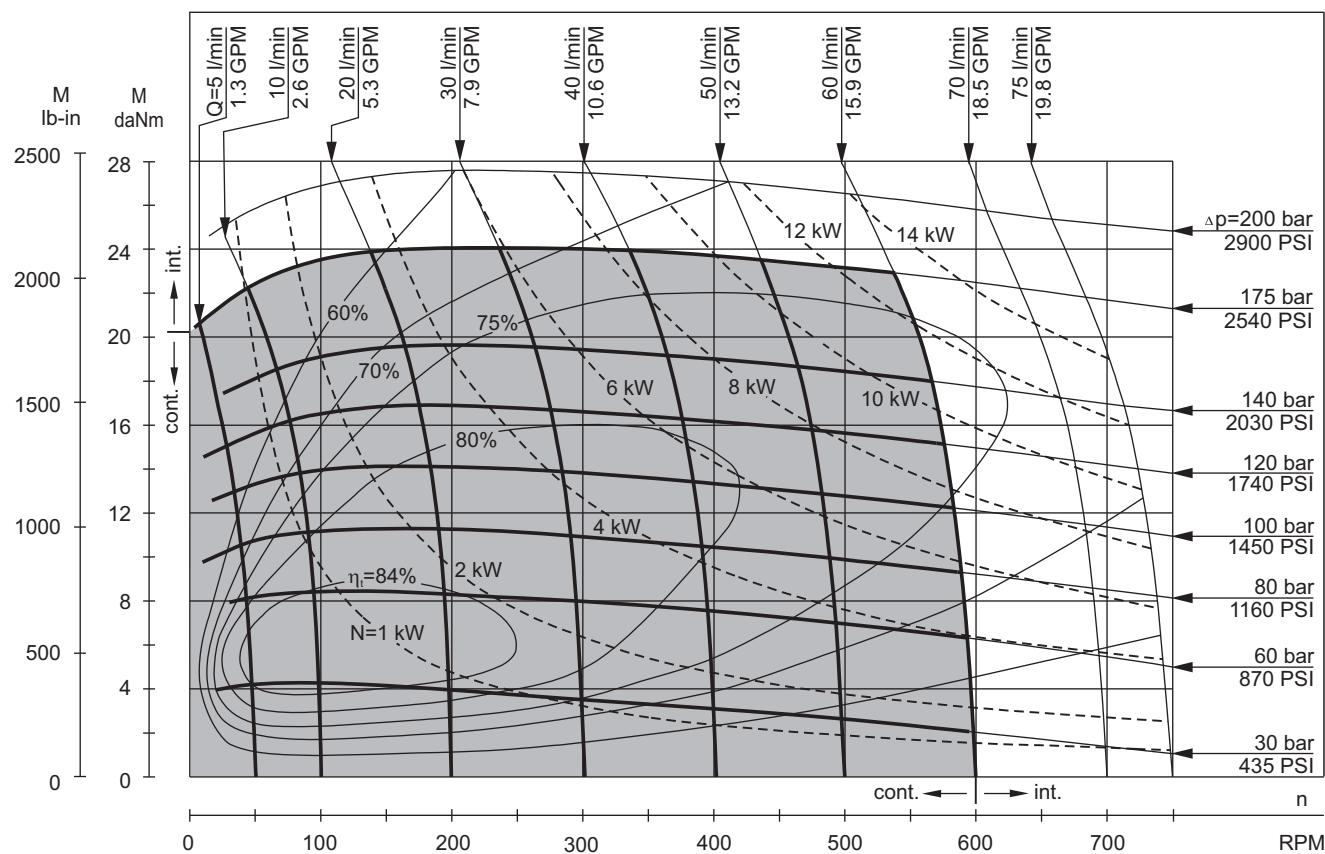


**MLHR 125**

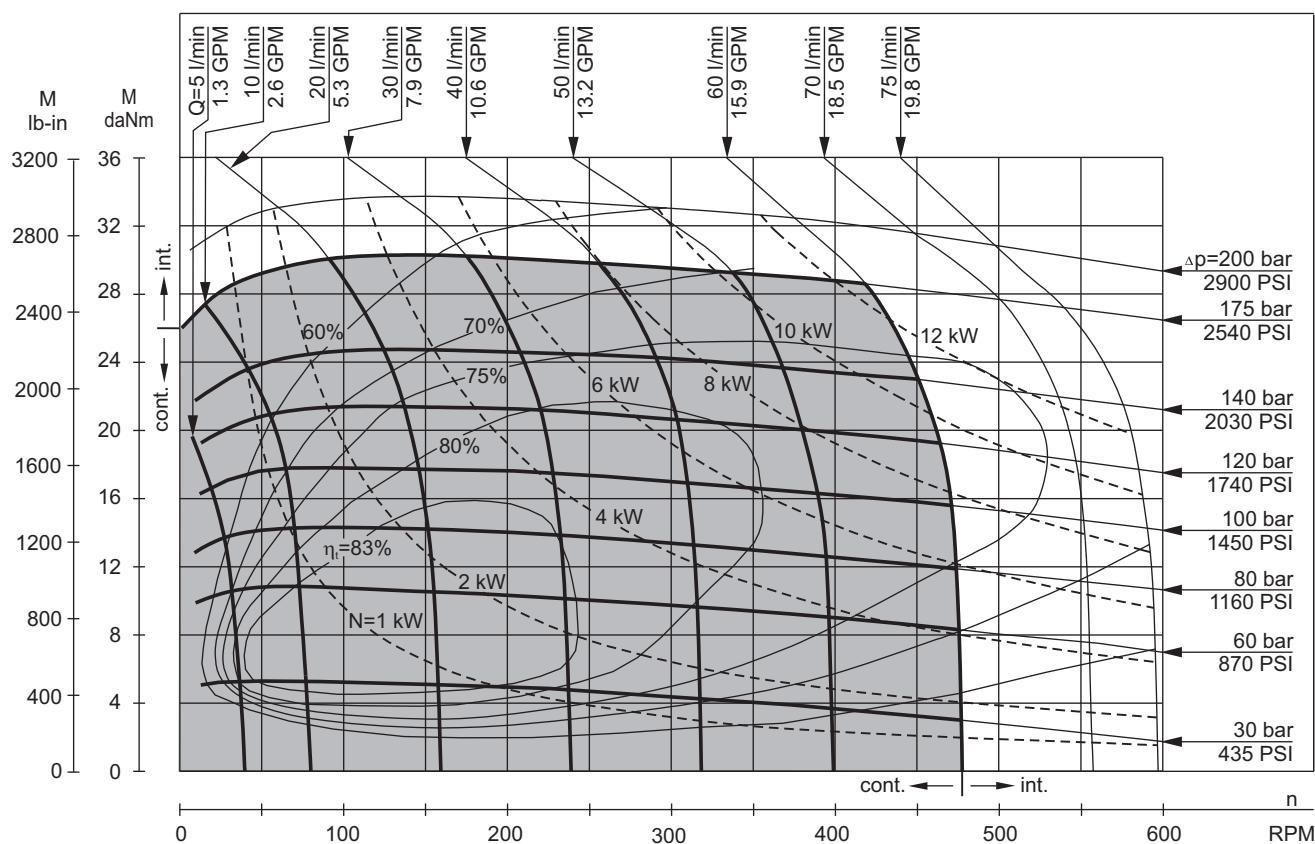


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI+145 PSI [5+10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHR 160**

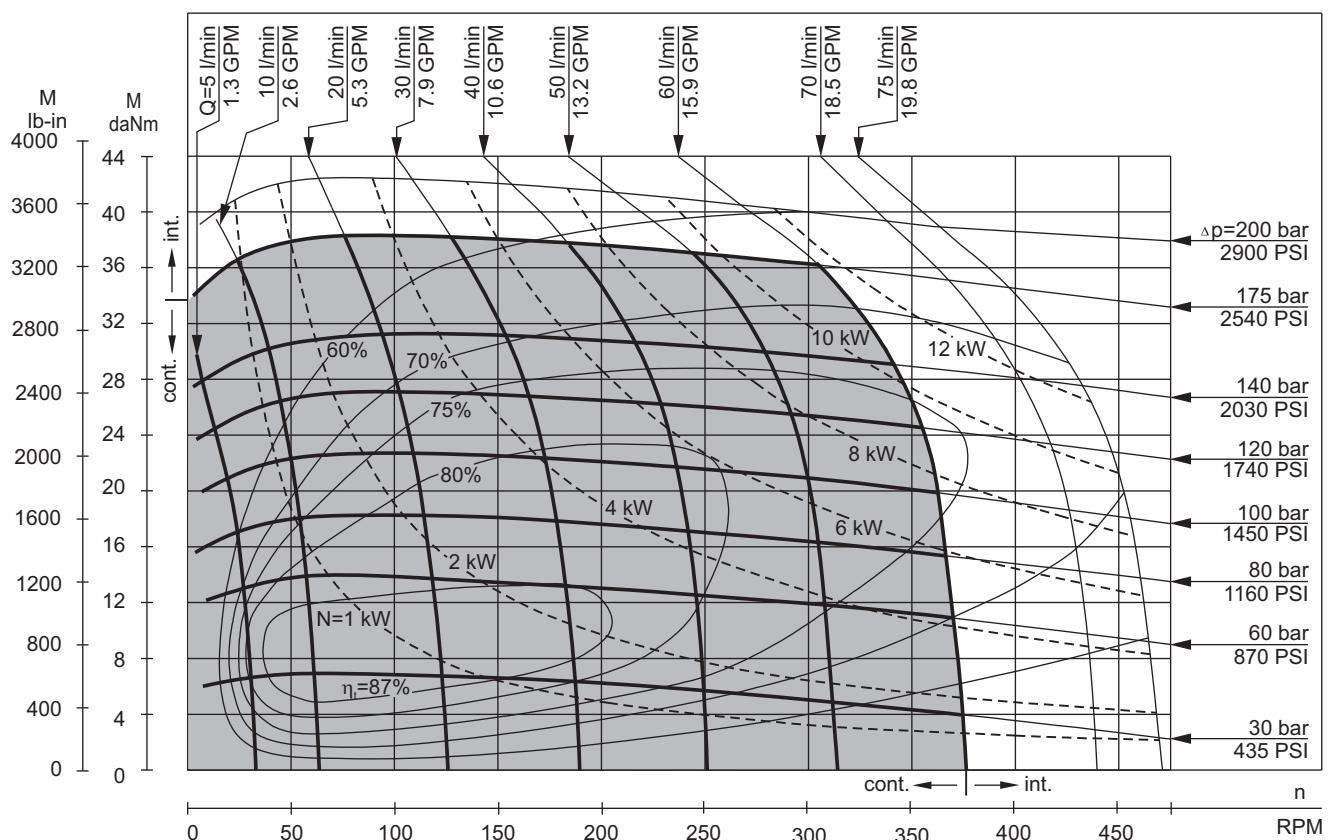


**MLHR 200**

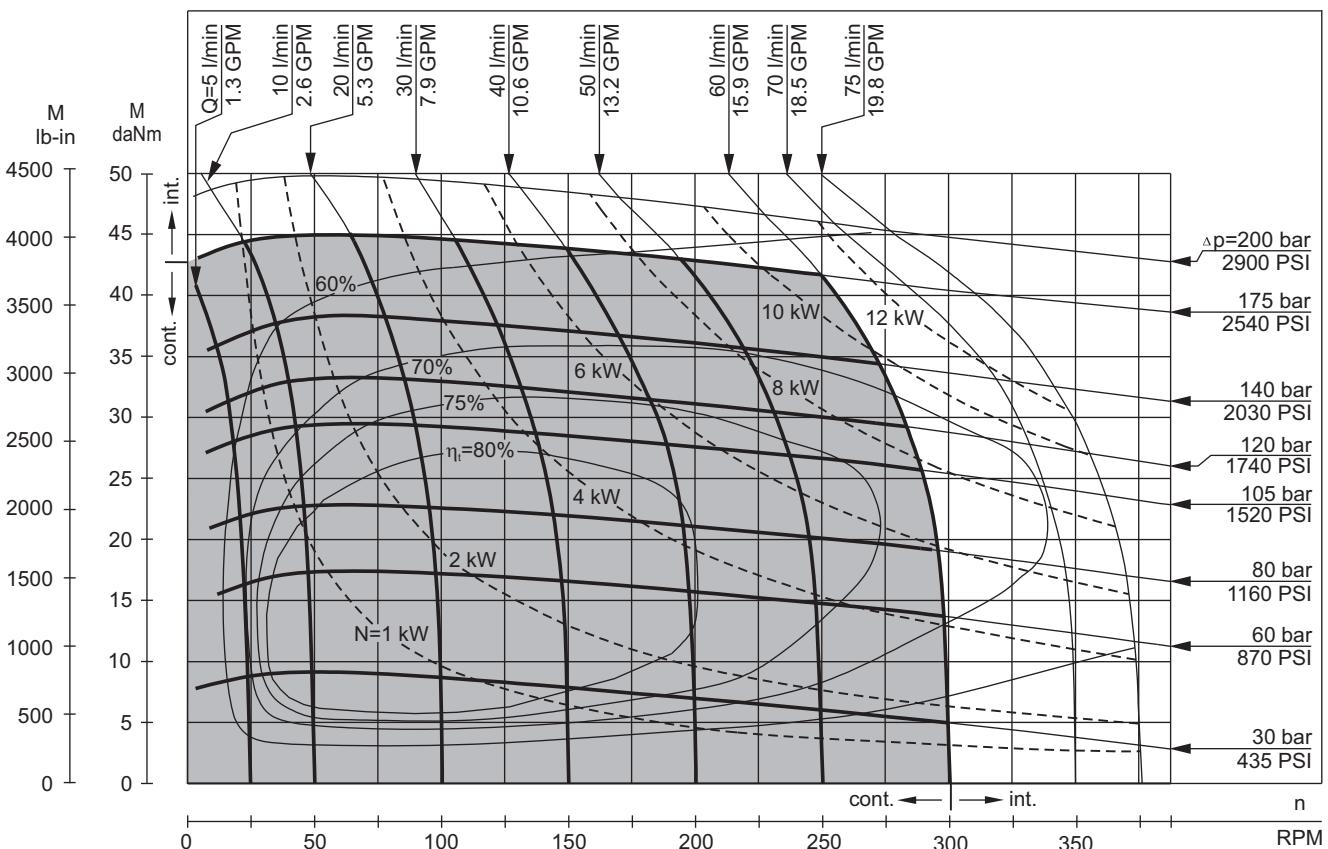


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI+145 PSI [5-10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHR 250**

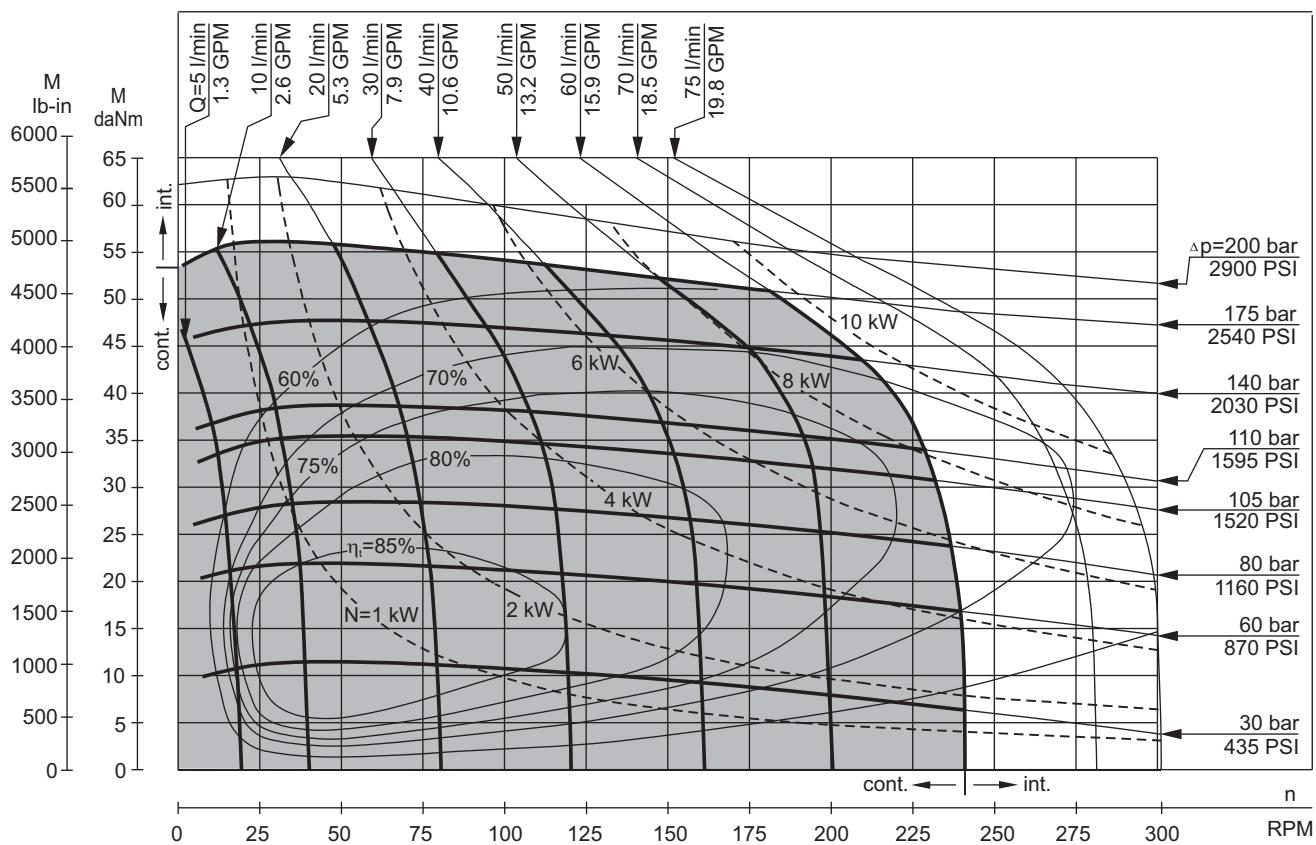


**MLHR 315**

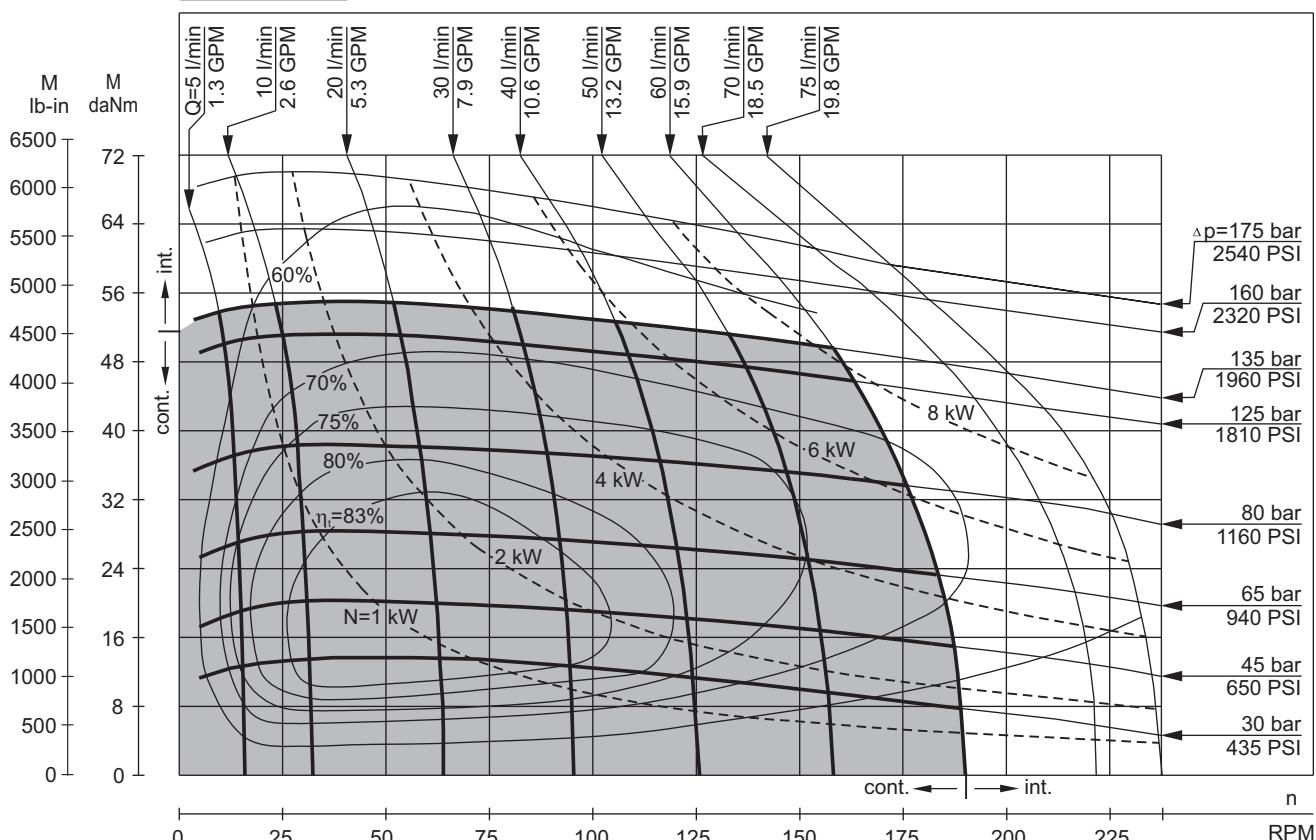

The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI +145 PSI [5-10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS


**MLHR 400**

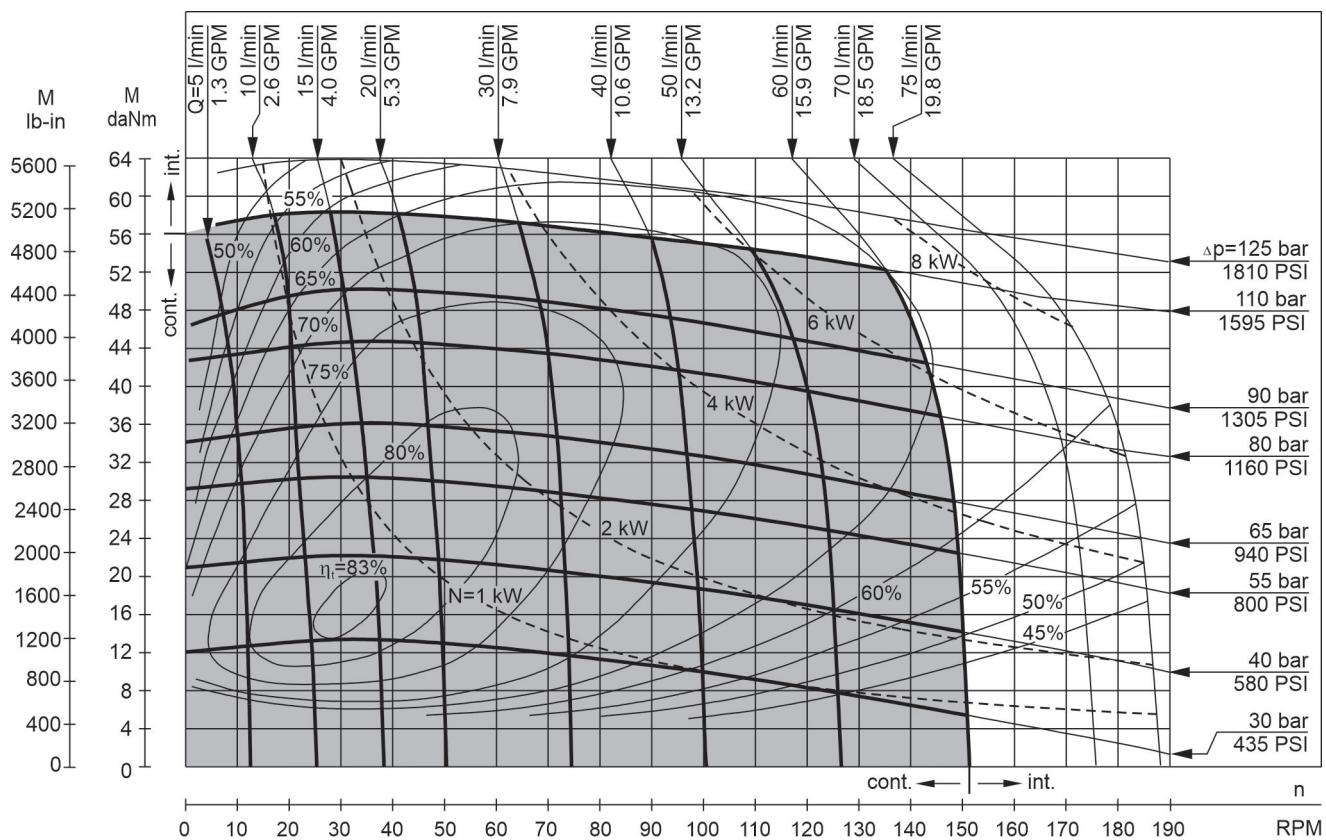


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI=145 PSI [5-10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

**DIMENSIONS and MOUNTING DATA**


**MLHR, MLHRF**

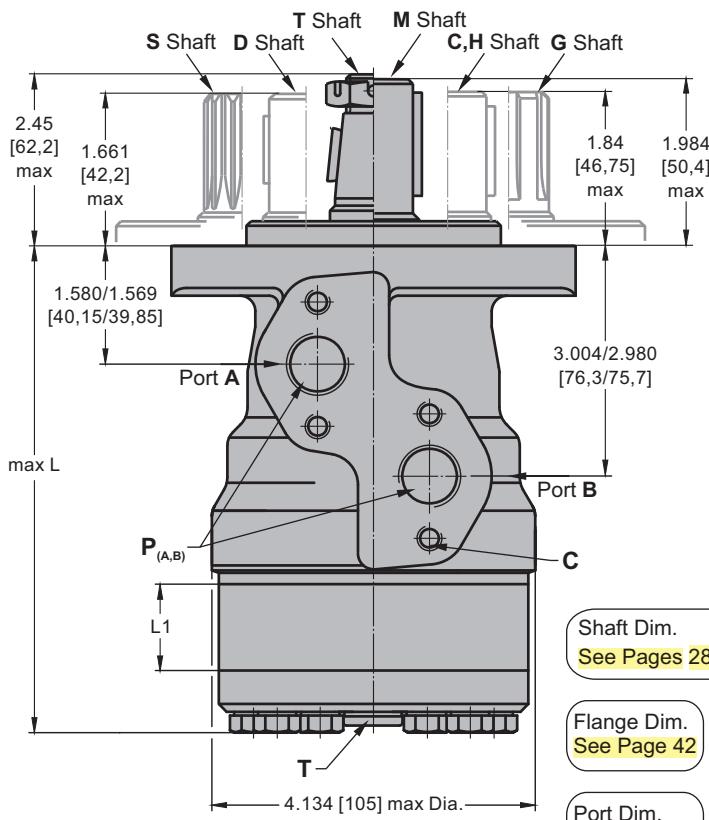


Version **6** **7** **8** **9**  
Rear ports

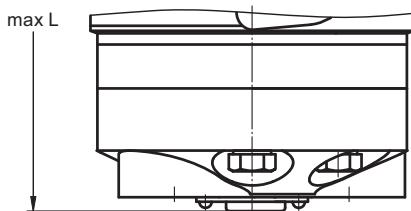


**MLHRQ, MLHRM**

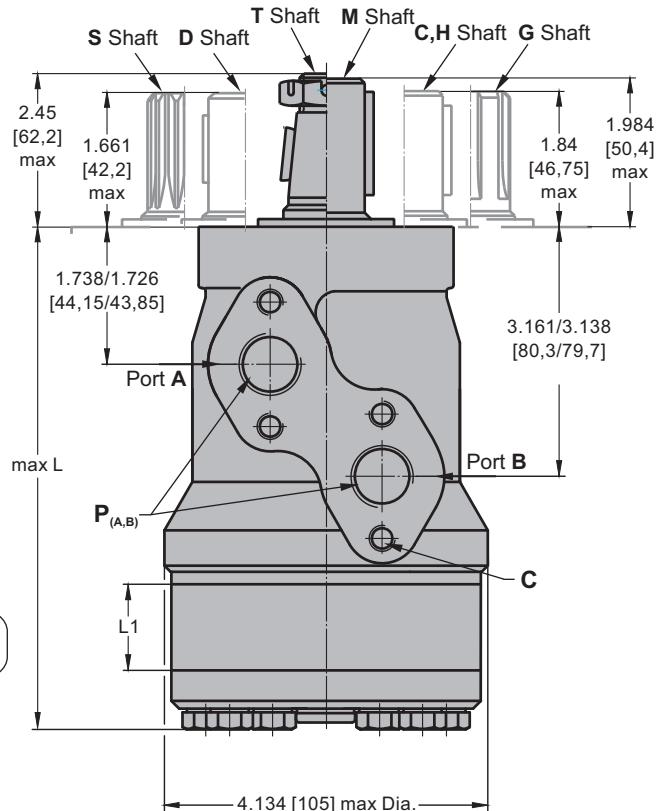

R Shaft B Shaft K Shaft L Shaft

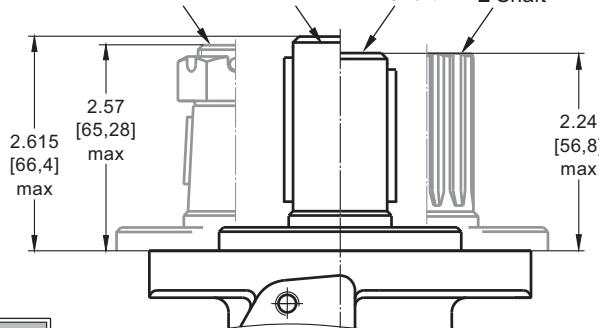

 in [mm]

**Versions**

	<b>2 , 6</b>	<b>3 , 9</b>	<b>4 , 7</b>	<b>5 , 8</b>
<b>C</b>	4xM8	4xM8	4x 5/16 - 18 UNF	4x 5/16 - 18 UNF
<b>P<sub>(A,B)</sub></b>	2xG 1/2	2xM22x1,5	2x 7/8 - 14 UNF	2x 1/2 - 14 NPTF
<b>T</b>	G 1/4	M14x1,5	7/16 - 20 UNF	7/16 - 20 UNF

**Standard Rotation**

Viewed from Shaft End

Port **A** Pressurized - **CW**

Port **B** Pressurized - **CCW**

**Reverse Rotation**

Viewed from Shaft End

Port **A** Pressurized - **CCW**


Port **B** Pressurized - **CW**

Type	L <sub>max</sub> , in [mm]		Type	L <sub>max</sub> , in [mm]		L <sub>1</sub> , in [mm]
	Versions 2,3,4,5	*Versions 6,7,8,9		Versions 2,3,4,5	*Versions 6,7,8,9	
MLHR(F) 50	5.51 [140,0]	6.14 [156,0]	MLHRQ(M) 50	5.67 [144,0]	6.30 [160,0]	.35 [9,0]
MLHR(F) 80	5.71 [145,0]	6.34 [161,0]	MLHRQ(M) 80	5.87 [149,0]	6.50 [165,0]	.55 [14,0]
MLHR(F) 100	5.85 [148,5]	6.48 [164,5]	MLHRQ(M) 100	6.00 [152,5]	6.63 [168,5]	.69 [17,4]
MLHR(F) 125	6.00 [152,5]	6.63 [168,5]	MLHRQ(M) 125	6.18 [157,0]	6.81 [173,0]	.86 [21,8]
MLHR(F) 160	6.24 [158,5]	6.87 [174,5]	MLHRQ(M) 160	6.42 [163,0]	7.05 [179,0]	1.09 [27,8]
MLHR(F) 200	6.52 [165,5]	7.15 [181,5]	MLHRQ(M) 200	6.69 [170,0]	7.32 [186,0]	1.37 [34,8]
MLHR(F) 250	6.87 [174,5]	7.50 [190,5]	MLHRQ(M) 250	7.03 [178,5]	7.60 [194,5]	1.71 [43,5]
MLHR(F) 315	7.30 [185,5]	7.93 [201,5]	MLHRQ(M) 315	7.48 [190,0]	8.11 [206,0]	2.16 [54,8]
MLHR(F) 400	7.89 [200,5]	8.52 [216,5]	MLHRQ(M) 400	8.05 [204,5]	8.68 [220,5]	2.73 [69,4]


\* - For Rear Ported Motors

## MOUNTING


SAE A Flange

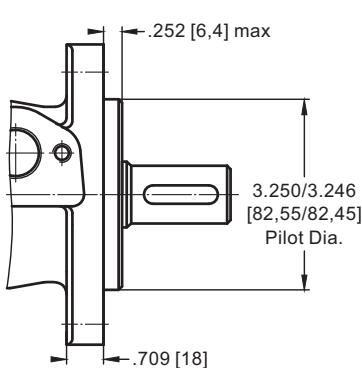

**F** - Magneto Flange

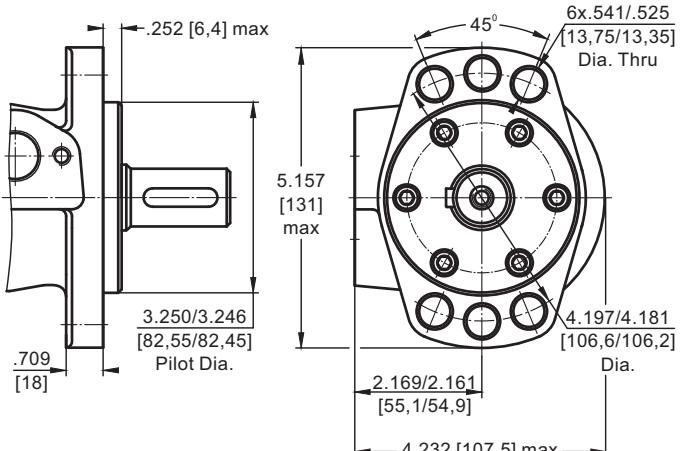

**M** and **Q** - Square Flange

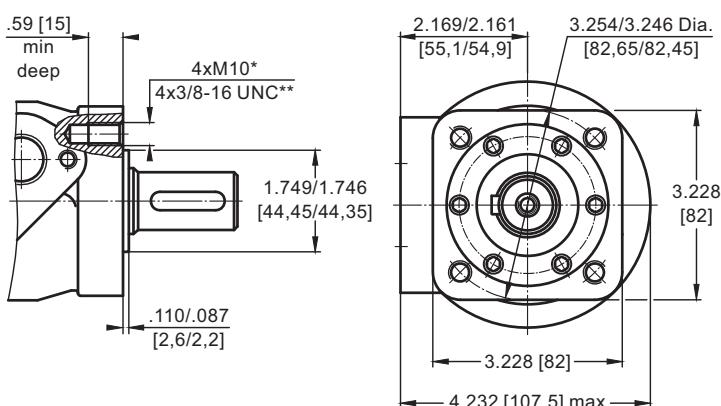


\* For **M** Flange  
\*\* For **Q** Flange

in [mm]

Side Ports


Version **2** **3** **4** **5**

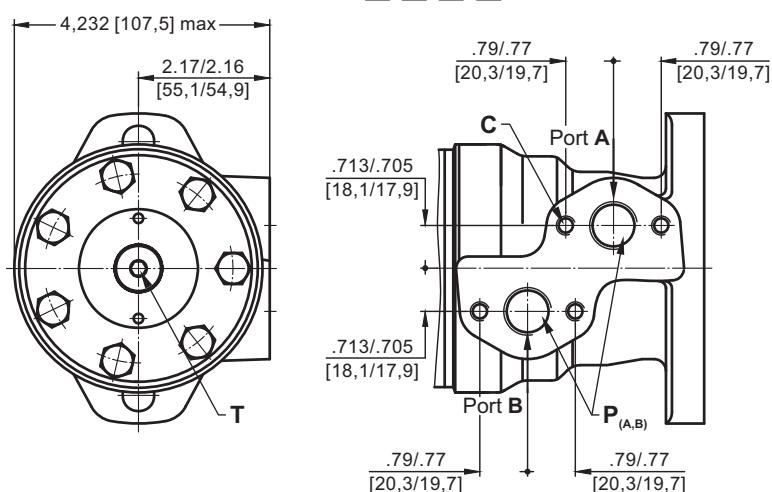

**PORTS**

Rear Ports

Version **6** **7** **8** **9**

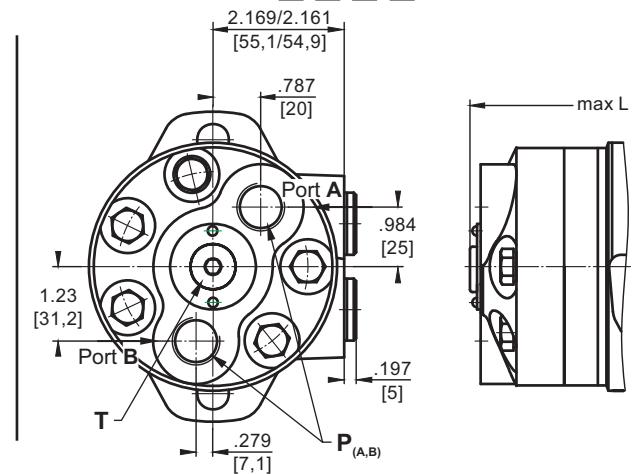

**Versions**

	<b>2</b> , <b>6</b>	<b>3</b> , <b>9</b>	<b>4</b> , <b>7</b>	<b>5</b> , <b>8</b>
<b>C</b>	4xM8	4xM8	4x $\frac{5}{16}$ - 18 UNF	4x $\frac{5}{16}$ - 18 UNF
<b>P<sub>(A,B)</sub></b>	2xG $\frac{1}{2}$	2xM22x1,5	2x $\frac{7}{8}$ - 14 UNF	2x $\frac{1}{2}$ - 14 NPTF
<b>T</b>	G $\frac{1}{4}$	M14x1,5	$\frac{7}{16}$ - 20 UNF	$\frac{7}{16}$ - 20 UNF

### Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

### Reverse Rotation

Viewed from Shaft End

Port A Pressurized - CCW

Port B Pressurized - CW

## ORDER CODE

1    2    3    4    5    6    7    8    9

M L H R								
---------	--	--	--	--	--	--	--	--

**Pos.1 - Mounting Flange**

- omit - SAE A, two holes
- F** - Magneto, six holes
- M** - Square metric, four bolts M10
- Q** - Square, four bolts

**Pos.2 - Displacement code**

- |            |   |
|------------|---|
| <b>50</b>  | - 3.14 in <sup>3</sup> /rev [ 51,5 cm <sup>3</sup> /rev]  |
| <b>80</b>  | - 4.90 in <sup>3</sup> /rev [ 80,3 cm <sup>3</sup> /rev]  |
| <b>100</b> | - 6.09 in <sup>3</sup> /rev [ 99,8 cm <sup>3</sup> /rev]  |
| <b>125</b> | - 7.67 in <sup>3</sup> /rev [125,7 cm <sup>3</sup> /rev]  |
| <b>160</b> | - 9.74 in <sup>3</sup> /rev [159,6 cm <sup>3</sup> /rev]  |
| <b>200</b> | - 12.19 in <sup>3</sup> /rev [199,8 cm <sup>3</sup> /rev] |
| <b>250</b> | - 15.26 in <sup>3</sup> /rev [250,1 cm <sup>3</sup> /rev] |
| <b>315</b> | - 19.26 in <sup>3</sup> /rev [315,7 cm <sup>3</sup> /rev] |
| <b>400</b> | - 24.40 in <sup>3</sup> /rev [397,0 cm <sup>3</sup> /rev] |

**Pos.3 - Shaft Extensions\* [see pages 28 and 29]**

- |           |   |
|-----------|---|
| <b>C</b>  | - 1" [25,4] straight, Parallel key                                |
| <b>VC</b> | - 1" [25,4] straight, Parallel key w/ corrosion resistant bushing |
| <b>D</b>  | - 7/8" [22,2] straight, Parallel key                              |
| <b>G</b>  | - 1" [25,4] SAE 6B Splined  |
| <b>H</b>  | - 1" [25,4] straight w/ .406 [10,3] Crosshole                     |
| <b>M</b>  | - 25 mm straight, Parallel key                                    |
| <b>VM</b> | - 25 mm straight, Parallel key w/ corrosion resistant bushing     |
| <b>S</b>  | - 7/8" [22,2] 13T Splined   |
| <b>T</b>  | - 1" [25,4] SAE J501 Tapered                                      |
| <b>B</b>  | - 32 mm straight, Parallel key                                    |
| <b>K</b>  | - 1 1/4" [31,75] straight, Parallel key                           |
| <b>L</b>  | - 1 1/4" [31,75] 14T Splined                                      |
| <b>R</b>  | - 1 1/4" [31,75] SAE J501 Tapered                                 |

**Pos.4 - Option [needle bearings]**

- |          |  |
|----------|--|
| <b>N</b> | - with needle bearings                                   |
| <b>2</b> | - side ports, 2xG1/2, G1/4, BSP thread, ISO 228          |
| <b>3</b> | - side ports, 2xM22x1,5, M14x1,5, metric thread, ISO 262 |
| <b>4</b> | - side ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF          |
| <b>5</b> | - side ports, 2x1/2-14 NPTF, 7/16-20 UNF                 |
| <b>6</b> | - rear ports, 2xG1/2, G1/4, BSP thread, ISO 228          |
| <b>7</b> | - rear ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF          |
| <b>8</b> | - rear ports, 2x1/2-14 NPTF, 7/16-20 UNF                 |
| <b>9</b> | - rear ports, 2xM22x1,5, M14x1,5, metric thread, ISO 262 |

**Pos.6 - Shaft Seal Version [see page 31]**

- omit - Standard shaft seal
- U** - High pressure shaft seal (without check valves)

**Pos.7 - Drain Port**

- omit - with drain port
- 1** - without drain port

**Pos.8 - Special Features [see page 110]**
**Pos.9 - Design Series**

- omit - Factory specified

**NOTES:** \* The permissible output torque for shafts must not be exceeded!

The following combinations are not allowed: - **Q** and **M** flange with **B**, **K**, **L**, **R** shafts;

- **N** option with **B**, **K**, **L**, **R** shafts, **U** option or **RS** option;
- **B**, **K**, **L**, **R** shafts with **U** option.

The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS MLHRFL

## APPLICATION

- » Actuator motor as driving-motor for steering mechanism of the three-wheel vehicles;
- » For conveyors (series connection);
- » Dosing motor etc.

## OPTIONS




- » Good start-up characteristics;
- » Precise control of the Torque at low small flow.
- » Smooth operation at high pressure and small oil flow;
- » High volumetric efficiency.

The hydraulic motors type MLHRFL... are designed to be used in operating modes with peak radial loads of the output shaft (especially at starting and stopping) at direct drive of wheels or mechanisms (without clutch or gearbox).

The radial loads are borne by a radial ball bearing which is mounted on the shaft of the hydraulic motor.



The main technical features correspond to the standard motors series MLHRFL 1.378 Dia. [35 mm] sealing diameter. There are no changes in the overall and mounting dimensions. For detailed technical and mounting data please refer to MLHR catalogue.

## MAX. PERMISSIBLE SHAFT SEAL PRESSURE

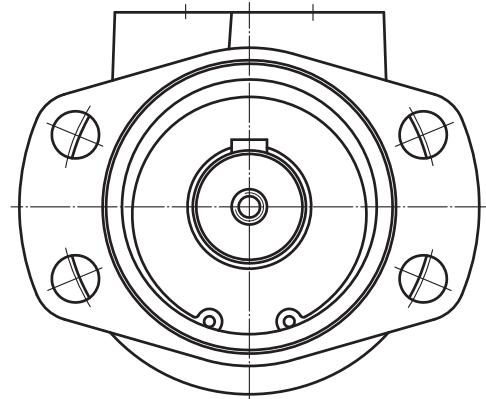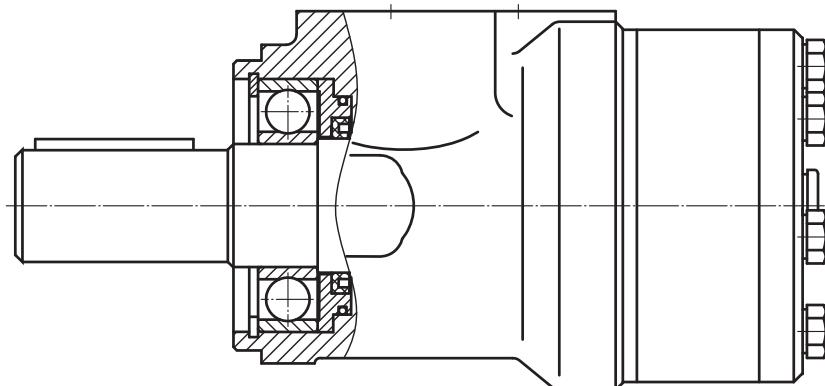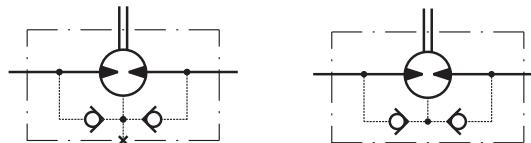


M2:1


D - Option with Dust Seal

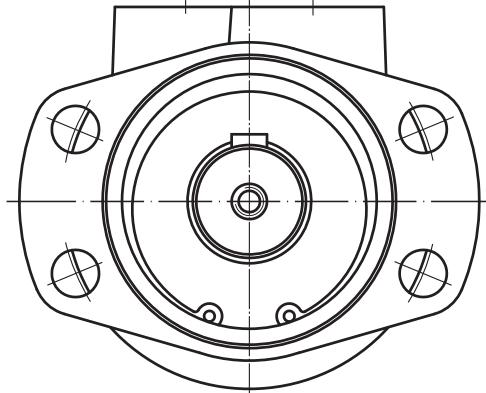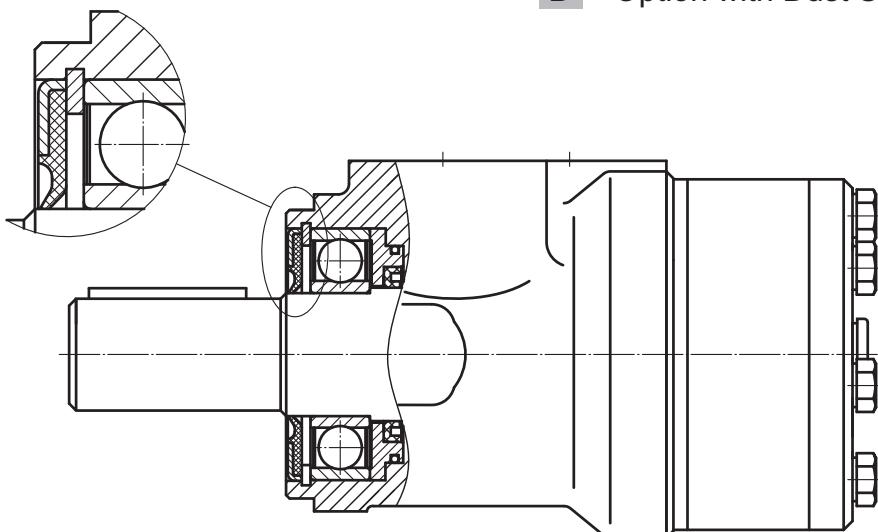

### PERMISSIBLE SHAFT LOADS

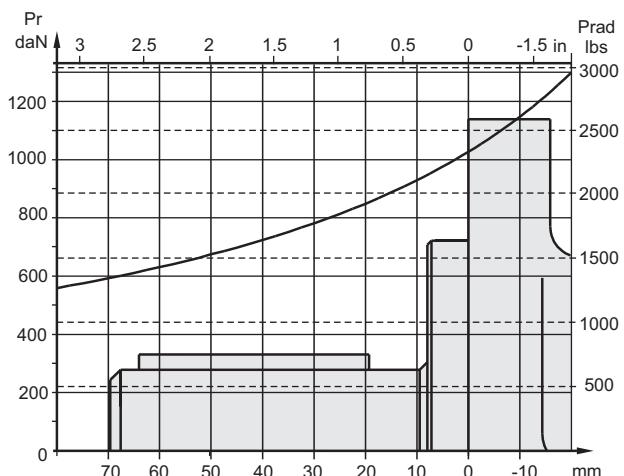

### MAX. PERMISSIBLE SHAFT SEAL PRESSURE

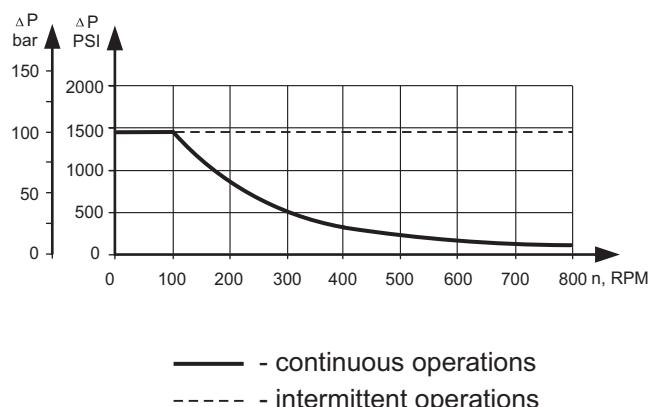

### ORDER CODE

<b>MR</b>	1	2	3	4	5	6	7	8	9	10
-----------	---	---	---	---	---	---	---	---	---	----

**Pos.1 - Mounting Flange**

**F** - Oval mount, four holes

**Pos.2 - Option [bearings]**

**L** - with radial ball bearing

**Pos.3 - Port type**

omit - Side ports

**E** - Rear ports

**Pos.4 - Displacement code**

**50** - 51,5 cm<sup>3</sup>/rev [ 3.14 in<sup>3</sup>/rev]

**80** - 80,3 cm<sup>3</sup>/rev [ 4.90 in<sup>3</sup>/rev]

**100** - 99,8 cm<sup>3</sup>/rev [ 6.09 in<sup>3</sup>/rev]

**125** - 125,7 cm<sup>3</sup>/rev [ 7.67 in<sup>3</sup>/rev]

**160** - 159,6 cm<sup>3</sup>/rev [ 9.74 in<sup>3</sup>/rev]

**200** - 199,8 cm<sup>3</sup>/rev [12.19 in<sup>3</sup>/rev]

**250** - 250,1 cm<sup>3</sup>/rev [15.26 in<sup>3</sup>/rev]

**315** - 315,7 cm<sup>3</sup>/rev [19.26 in<sup>3</sup>/rev]

**400** - 397,0 cm<sup>3</sup>/rev [24.40 in<sup>3</sup>/rev]

**Pos. 5 - Shaft Extensions**

**CB** - ø32 straight, Parallel key A10x8x45 DIN6885

**KB** - ø35 tapered 1:10, Parallel key B6x6x20 DIN6885

**SB** - splined A 25x22 DIN 5482

**OB** - ø1¼" tapered 1:8, Parallel key 5/16"x5/16"x1¼" BS46

**HB** - ø1¼" splined 14T ANSI B92.1 - 1976

**Pos. 6 - Option [Dust Seal]**

omit - without dust seal

**D** - with dust seal

**Pos. 7 - Drain Port**

omit - with drain port

**1** - without drain port

**Pos. 8 - Ports**

omit - BSPP (ISO 228)

**M** - Metric (ISO 262)

**Pos. 9 - Special Features [see page 110]**


**Pos.10 - Design Series**

omit - Factory specified

**NOTES:** \* The permissible output torque for shafts must not be exceeded!



The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS MLHPL



## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Mining machinery etc.



## CONTENTS

Specification data .....	45
Dimensions and mounting .....	46
Shaft extensions .....	47
Permissible shaft loads .....	48
Order code .....	48

## OPTIONS

- » Model - Spool valve, gerotor
- » Antifriction needle bearing
- » Flange mount
- » Shafts - straight, splined and tapered
- » Metric and BSPP ports
- » Other special features


## GENERAL

<b>Max. Displacement,</b> in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	24.16 [396]
<b>Max. Speed,</b> [RPM]	1515
<b>Max. Torque,</b> lb-in [daNm]	cont.: 4415 [50] int.: 5222 [59]
<b>Max. Output,</b> HP [kW]	23.5 [17,5]
<b>Max. Pressure Drop,</b> PSI [bar]	cont.: 2030 [140] int.: 2540 [175]
<b>Max. Oil Flow,</b> GPM [lpm]	20 [75]
<b>Min. Speed,</b> [RPM]	10
<b>Pressure fluid</b>	Mineral based - HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °F [°C]	-40 ÷ 284 [-40 ÷ 140]
<b>Optimal Viscosity range,</b> SUS [mm <sup>2</sup> /s]	98 ÷ 347 [20 ÷ 75]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure drop PSI [bar]	Viscosity SUS [mm <sup>2</sup> /s]	Oil flow in drain line GPM [lpm]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]

Pressure Losses

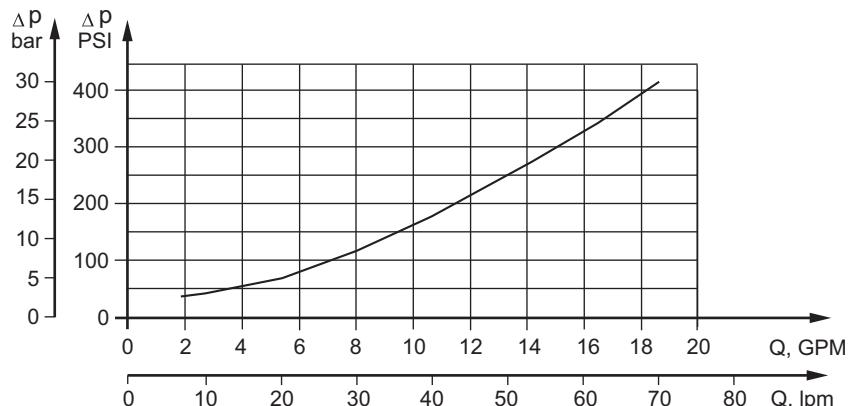

## SPECIFICATION DATA

Type	MLHPL 50	MLHPL 80	MLHPL 100	MLHPL 125	MLHPL 160	MLHPL 200	MLHPL 250	MLHPL 315	MLHPL 400
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	3.02 [49,5]	4.83 [79,2]	6.04 [99]	7.55 [123,8]	9.66 [158,4]	12.1 [198]	15.1 [247,5]	19.3 [316,8]	24.16 [396]
<b>Max. Speed, [RPM]</b>	Cont. Int.*	1210 1515	755 945	605 755	485 605	378 472	303 378	242 303	190 236
<b>Max. Torque, lb-in [daNm]</b>	Cont. Int.* Peak**	832 [9,4] 1054 [11,9] 1240 [14,0]	1336 [15,1] 1725 [19,5] 1947 [22,0]	1708 [19,3] 2097 [23,7] 2390 [27,0]	2100 [23,7] 2637 [29,8] 3230 [36,5]	2770 [31,3] 3345 [37,8] 3717 [42]	3240 [36,6] 4035 [45,6] 4700 [53]	4160 [47] 5160 [58,3] 5930 [67]	4300 [48,6] 4956 [56] 7523 [85]
<b>Max. Output, HP [kW]</b>	Cont. Int.*	13.3 [9,9] 16.8 [12,5]	13.3 [9,9] 16.8 [12,5]	13.3 [9,9] 16.8 [12,5]	13.3 [9,9] 16.8 [12,5]	15.7 [11,7] 16.8 [12,5]	13.8 [10,3] 20.8 [15,5]	13.1 [9,8] 23.5 [17,5]	10.2 [7,6] 11 [8,2]
<b>Max. Pressure Drop,</b>	Cont. Int.* Peak**	2030 [140] 2540 [175]	1300 [120] 2030 [140]	1015 [95] 1665 [115]					
<b>PSI [bar]</b>	Cont. Int.* Peak**	3260 [225] 3260 [225]	2610 [180]						
<b>Max. Oil Flow, GPM [lpm]</b>	Cont. Int.*	16 [60] 20 [75]							
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200]							
<b>Max. Return Pres- sure without Drain Line or Max. Pres- sure in Drain Line, PSI [bar]</b>	Cont. 0-100 RPM Cont. 100-300 RPM Cont. 300-600 RPM Cont. >600 RPM Int.* 0-max. RPM	1450 [100] 725 [50] 365 [25] 220 [15] 1450 [100]							
<b>Max. Return Pre- ssure with Drain Line, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200]							
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	145 [10]	130 [9]	116 [8]	100 [7]	87 [6]	73 [5]
<b>Min. Starting Torque, lb-in [daNm]</b>		681 [7,7]	1150 [13]	1487 [16,8]	1860 [21]	2478 [28]	2850 [32,2]	3665 [41,4]	3805 [43]
<b>Min. Speed***, [RPM]</b>		10	10	10	10	10	10	10	10
<b>Weight, lb [kg]</b>		15 [6,8]	15.4 [7]	15.7 [7,1]	15.9 [7,2]	16.3 [7,4]	16.8 [7,6]	17.2 [7,8]	18 [8,2]
									18.9 [8,6]


\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## DIMENSIONS and MOUNTING DATA

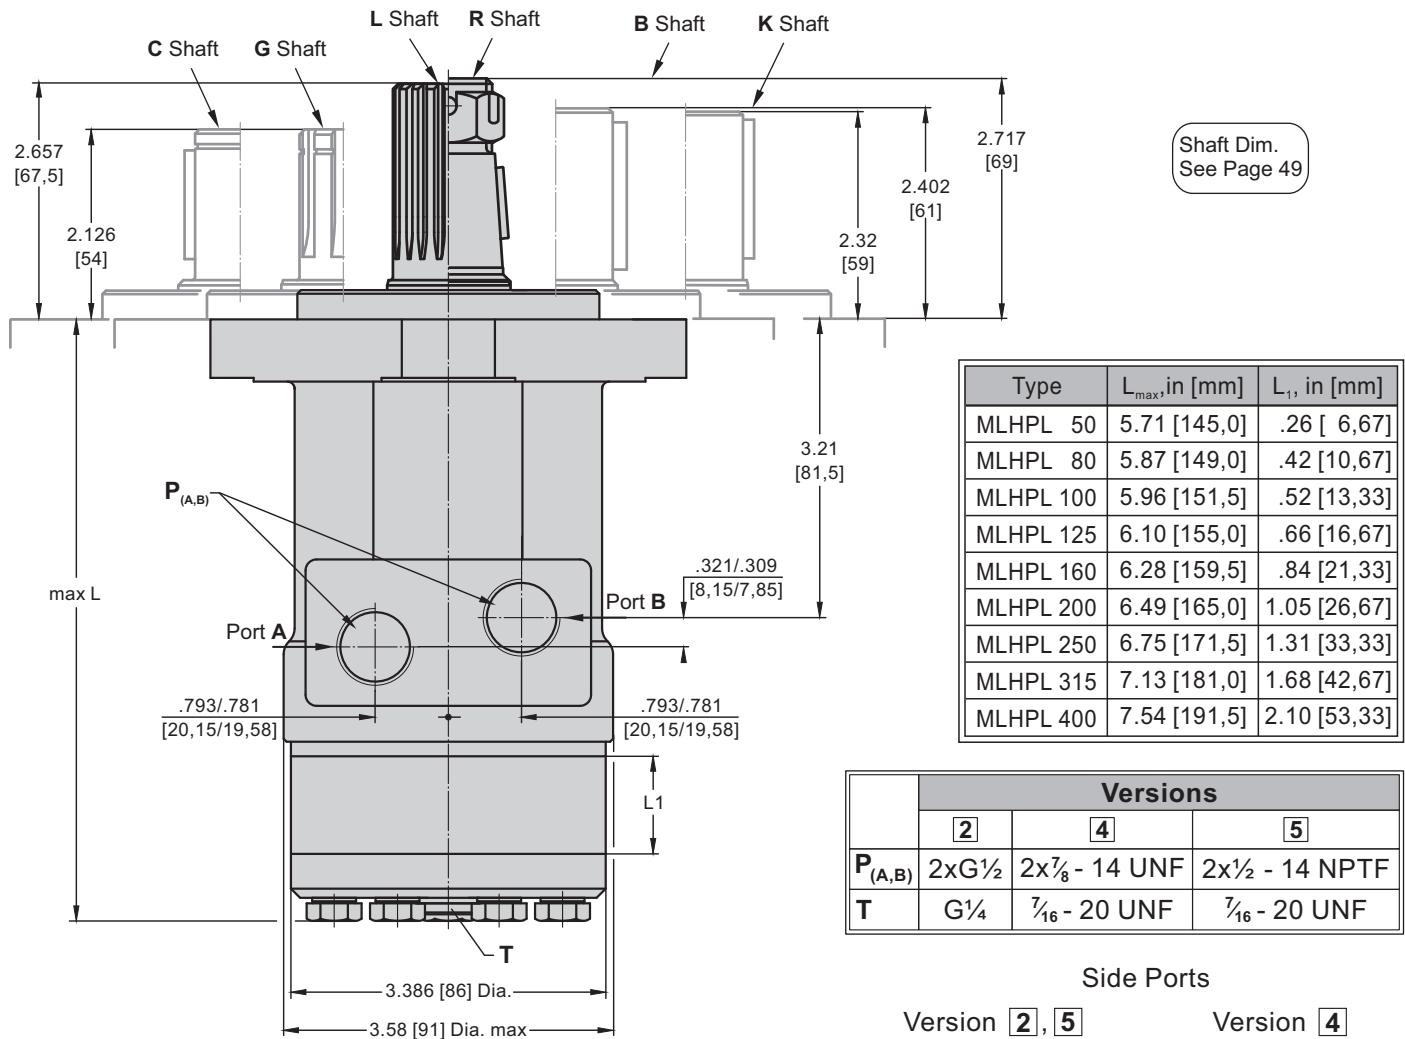



**Standard Rotation**  
Viewed from Shaft End  
Port A Pressurized - CW  
Port B Pressurized - CCW

**Reverse Rotation**  
Viewed from Shaft End  
Port A Pressurized - CCW  
Port B Pressurized - CW

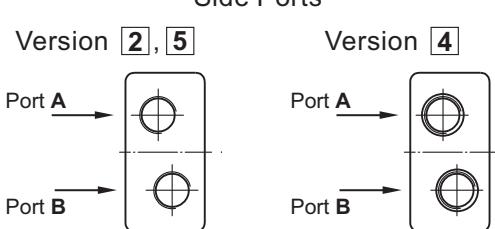


## MOUNTING

Square Mount (4 Holes)

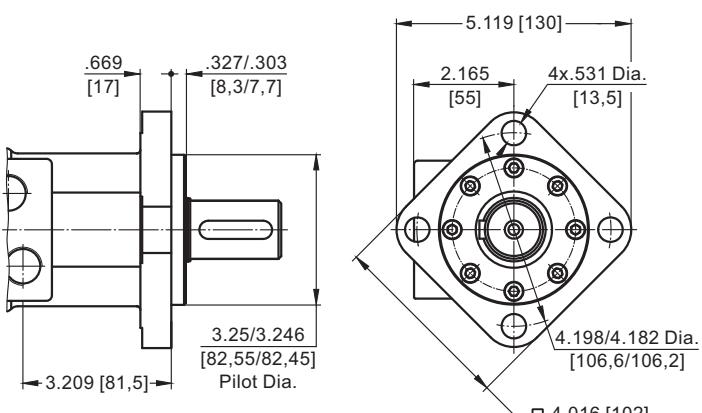


in [mm]

F - Oval Mount (four Holes)

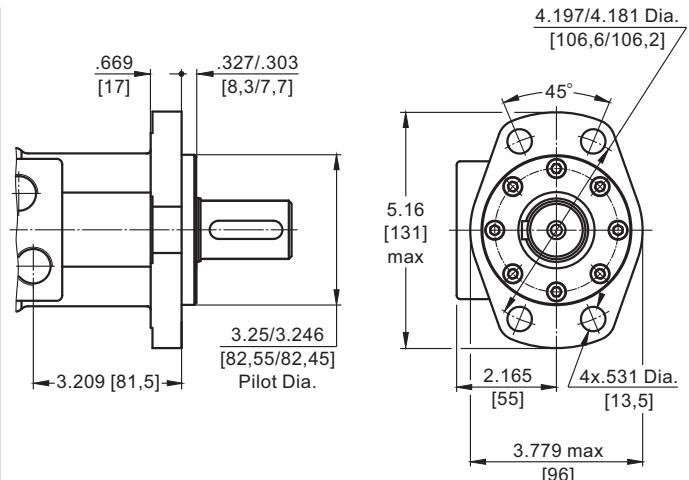


## SHAFT EXTENSIONS for MLHPL and MLHRL


**B** - ø32, Parallel key A10x8x40 DIN 6885  
Max. Torque 6815 lb-in [77 daNm]

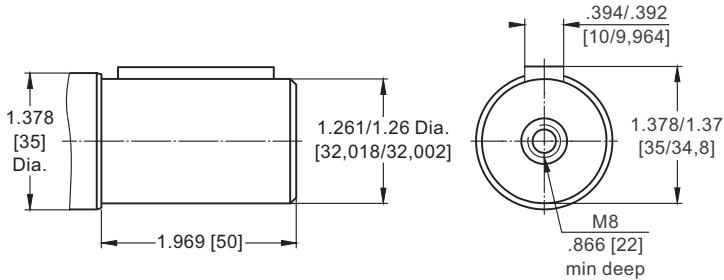


**L** - 14T splined, 1¼" [31,75], ANS B92.1-1976  
Max. Torque 6815 lb-in [77 daNm]

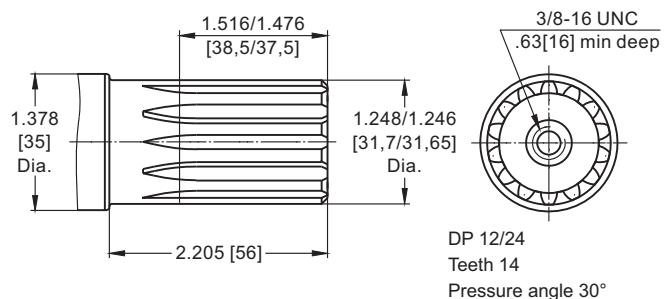


**K** - 1¼" [31,75] straight, Parallel key 5/16" x 5/16" x 1¼" BS46  
Max. Torque 6815 lb-in [77 daNm]

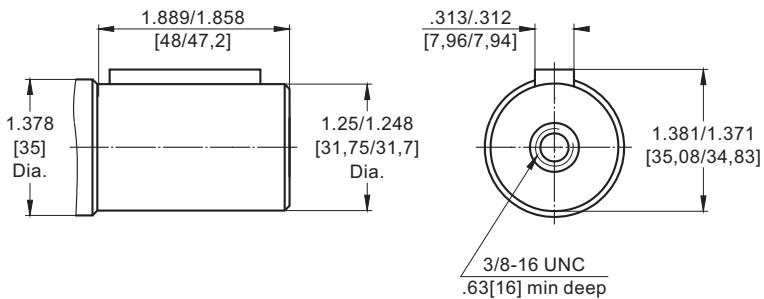


**C** - 1" [25,4] straight, Parallel key 1/4" x 1/4" x 1¼" BS46  
Max. Torque 3010 lb-in [34 daNm]

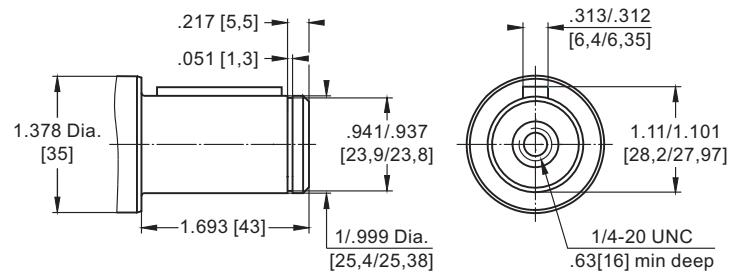

**G** - 1" [25,4] splined Bs2059 (SAE 6B)  
Max. Torque 3010 lb-in [34 daNm]

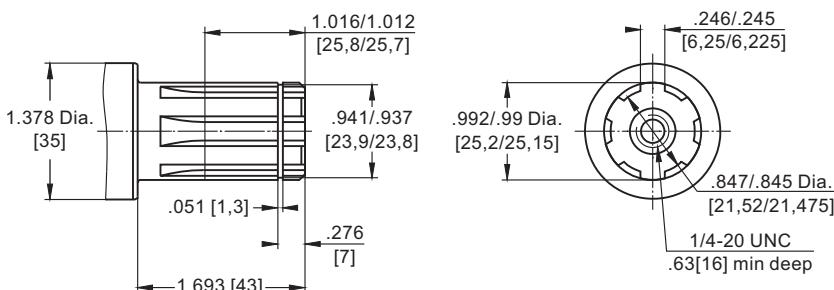

**R** - 1¼" [31,75] tapered, SAE J501,  
Parallel key 5/16" x 5/16" x 1" BS46  
Max. Torque 34 daNm [3010 lb-in]

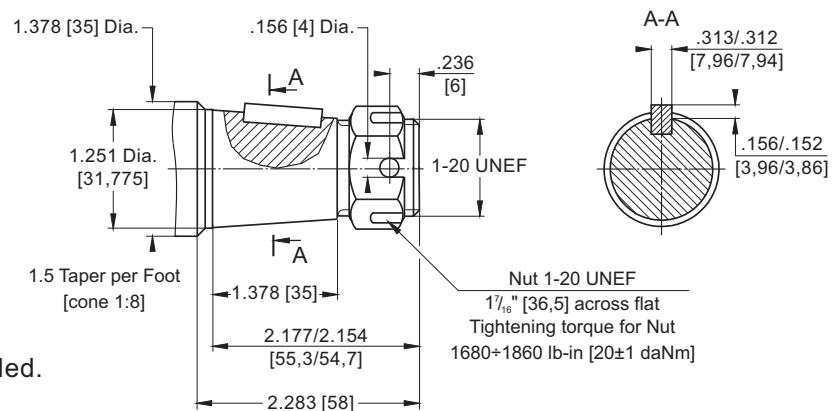


▽ - Motor Mounting Surface



Requirement max. Torque must be not exceeded.

## PERMISSIBLE SHAFT LOADS for MLHPL and MLHRL

The curves apply to a B10 bearings life of 2000 hrs

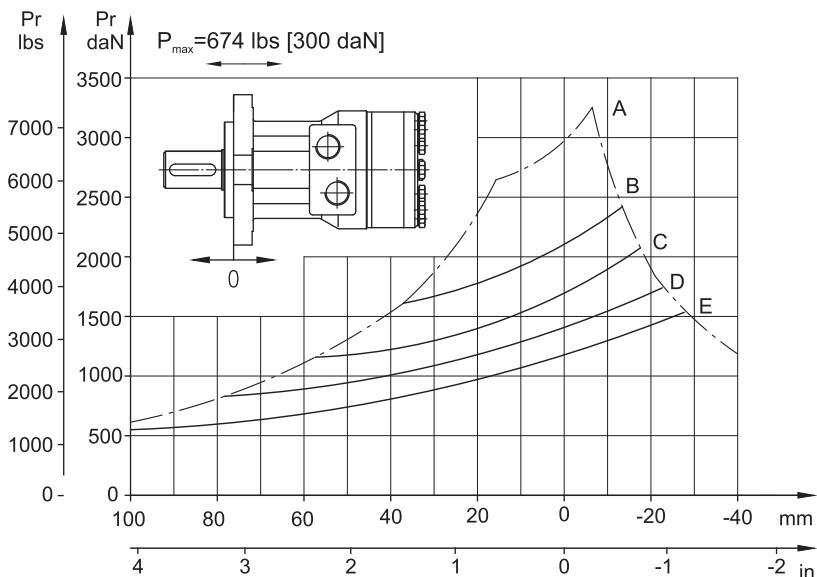

- A** - Max. radial shaft load.
- B** -  $n=50 \text{ min}^{-1}$
- C** -  $n=100 \text{ min}^{-1}$
- D** -  $n=200 \text{ min}^{-1}$
- E** -  $n=400 \text{ min}^{-1}$

## ORDER CODE

<b>MLHPL</b>	1	2	3	4	5	6
--------------	---	---	---	---	---	---

### Pos.1 - Mounting Flange

omit - Square mount, four holes

**F** - Oval mount, four holes

### Pos.2 - Displacement code\*

<b>50</b>	- 3.02 in <sup>3</sup> /rev [ 49,5 cm <sup>3</sup> /rev]
<b>80</b>	- 4.83 in <sup>3</sup> /rev [ 79,2 cm <sup>3</sup> /rev]
<b>100</b>	- 6.04 in <sup>3</sup> /rev [ 99,0 cm <sup>3</sup> /rev]
<b>125</b>	- 7.55 in <sup>3</sup> /rev [123,8 cm <sup>3</sup> /rev]
<b>160</b>	- 9.66 in <sup>3</sup> /rev [158,4 cm <sup>3</sup> /rev]
<b>200</b>	- 12.10 in <sup>3</sup> /rev [198,0 cm <sup>3</sup> /rev]
<b>250</b>	- 15.10 in <sup>3</sup> /rev [247,5 cm <sup>3</sup> /rev]
<b>315</b>	- 19.30 in <sup>3</sup> /rev [316,8 cm <sup>3</sup> /rev]
<b>400</b>	- 24.16 in <sup>3</sup> /rev [396,0 cm <sup>3</sup> /rev]

### Pos.3 - Shaft Extensions\*\*

**B** - ø32 straight, Parallel key

**K** - 1 1/4" [31,75] straight, Parallel key

**L** - 1 1/4" [31,75] splined 14T ANS B 92.1-1976

**R** - 1 1/4" [31,75] tapered SAE J 501

**C** - ø25,4 straight, Parallel key

**G** - ø25,4 splined BS 2059 (SAE 6B)

### Pos.4 - Port Size/Type [standard manifold to each]

**2** - side ports, 2xG1/2, G1/4, BSP thread, ISO 228

**4** - side ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF

**5** - side ports, 2x1/2-14 NPTF, 7/16-20 UNF

### Pos.5 - Special Features [see page 110]

### Pos.6 - Design Series

omit - Factory specified


## NOTES:

\* For the Function Diagrams please look at "M+S Hydraulic" Catalogue for MLHP motors, pages 19÷23.

\*\* The permissible output torque for shafts must not be exceeded!



The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS MLHRL

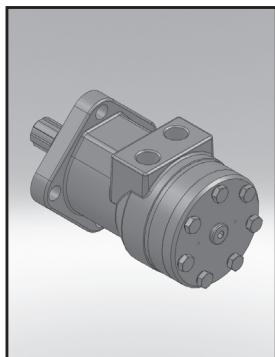

## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Mining machinery etc.



## CONTENTS

Specification data .....	52
Dimensions and mounting .....	53
Shaft extensions .....	49
Permissible shaft loads .....	50
Permissible shaft seal pressure ....	50
Order code .....	54

## OPTIONS

- » Model - Spool valve, roll-gerotor
- » Antifriction needle bearing
- » Flange mount
- » Shafts - straight, splined and tapered
- » Metric and BSPP ports
- » Other special features


## GENERAL

<b>Max. Displacement,</b> in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	24.4 [397]
<b>Max. Speed,</b> [RPM]	970
<b>Max. Torque,</b> lb-in [daNm]	cont.: 5400 [61] int.: 6100 [69]
<b>Max. Output,</b> HP [kW]	21.5 [16]
<b>Max. Pressure Drop,</b> PSI [bar]	cont.: 2540 [175] int.: 2900 [200]
<b>Max. Oil Flow,</b> GPM [lpm]	20 [75]
<b>Min. Speed,</b> [RPM]	10
<b>Pressure fluid</b>	Mineral based - HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °F [°C]	-40 ÷ 284 [-40 ÷ 140]
<b>Optimal Viscosity range,</b> SUS [mm <sup>2</sup> /s]	98 ÷ 347 [20 ÷ 75]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure drop PSI [bar]	Viscosity SUS [mm <sup>2</sup> /s]	Oil flow in drain line GPM [lpm]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]

Pressure Losses

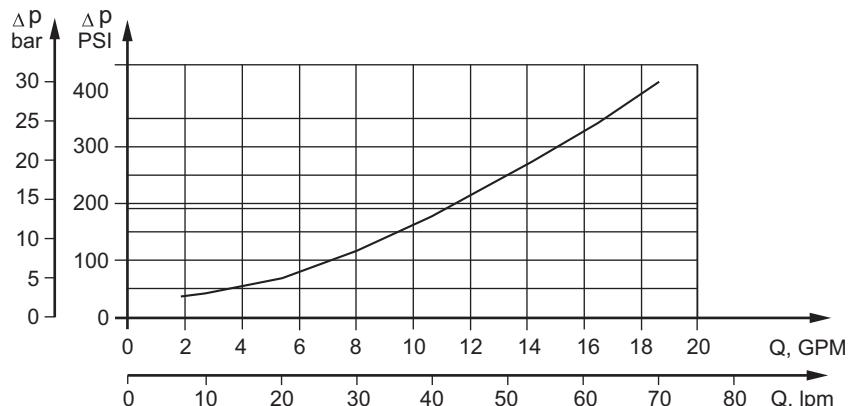

**SPECIFICATION DATA**

Type	MLHRL 50	MLHRL 80	MLHRL 100	MLHRL 125	MLHRL 160	MLHRL 200	MLHRL 250	MLHRL 315	MLHRL 400
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	3.14 [51,5]	4.90 [80,3]	6.09 [99,8]	7.67 [125,7]	9.74 [159,6]	12.19 [199,8]	15.26 [250,1]	19.26 [315,7]	24.4 [397]
<b>Max. Speed, [RPM]</b>	Cont.	775	750	600	475	375	300	240	190
	Int.*	970	940	750	600	470	375	300	240
<b>Max. Torque, lb-in [daNm]</b>	Cont.	900 [10,1]	1770 [20]	2125 [24]	2655 [30]	3450 [39]	4000 [45]	4780 [54]	4870 [55]
	Int.*	1150 [13]	1947 [22,0]	2480 [28]	3010 [34]	3805 [43]	4425 [50]	5400 [61]	5580 [63]
	Peak**	1505 [17]	2390 [27,0]	2832 [32]	3275 [37]	4070 [46]	4960 [56]	6280 [71]	7350 [83]
<b>Max. Output, HP [kW]</b>	Cont.	9.5 [7]	17 [12,5]	17.4 [13]	16.8 [12,5]	15.4 [11,5]	14.8 [11]	13.4 [10]	12 [9]
	Int.*	11.9 [8,5]	20.1 [15]	20.1 [15]	21.5 [16]	18.8 [14]	17.4 [13]	16.1 [12]	14.8 [11]
<b>Max. Pressure Drop,</b>	Cont.	2030 [140]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	1960 [135]
<b>PSI [bar]</b>	Int.*	2540 [175]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2320 [160]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	2030 [140]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont.	11 [40]	16 [60]	16 [60]	16 [60]	16 [60]	16 [60]	16 [60]	16 [60]
	Int.*	13 [50]	20 [75]	20 [75]	20 [75]	20 [75]	20 [75]	20 [75]	20 [75]
<b>Max. Inlet Pressure,</b>	Cont.	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
<b>PSI [bar]</b>	Int.*	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	2900 [200]
<b>Max. Return Pres- sure without Drain</b>	Cont. 0-100 RPM	1450 [100]	1450 [100]	1450 [100]	1450 [100]	1450 [100]	1450 [100]	1450 [100]	1450 [100]
	Cont. 100-300 RPM	725 [50]	725 [50]	725 [50]	725 [50]	725 [50]	725 [50]	725 [50]	725 [50]
<b>Line or Max. Pres- sure in Drain Line,</b>	Cont. 300-600 RPM	365 [25]	365 [25]	365 [25]	365 [25]	365 [25]	365 [25]	365 [25]	365 [25]
<b>PSI [bar]</b>	Cont. >600 RPM	220 [15]	220 [15]	220 [15]	220 [15]	220 [15]	220 [15]	220 [15]	220 [15]
	Int.* 0-max. RPM	1450 [100]	1450 [100]	1450 [100]	1450 [100]	1450 [100]	1450 [100]	1450 [100]	1450 [100]
<b>Max. Return Pre- ssure with Drain</b>	Cont.	2030 [140]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
<b>Line, PSI [bar]</b>	Int.*	2540 [175]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2900 [200]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	2900 [200]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>	145 [10]	145 [10]	145 [10]	130 [9]	100 [7]	73 [5]	58 [4]	44 [3]	44 [3]
<b>Min. Starting Torque, lb-in [daNm]</b>	710 [8]	1330 [15]	1770 [20]	2215 [25]	2835 [32]	3275 [37]	4000 [45]	4000 [45]	4340 [49]
<b>Min. Speed***, [RPM]</b>	10	10	10	10	10	10	10	10	10
<b>Weight, lb [kg]</b>	18.7 [8,5]	19 [8,6]	19.6 [8,9]	19.8 [9,0]	20.3 [9,2]	21.2 [9,6]	22.3 [10,1]	23.8 [10,8]	25.4 [11,5]


\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## DIMENSIONS and MOUNTING DATA

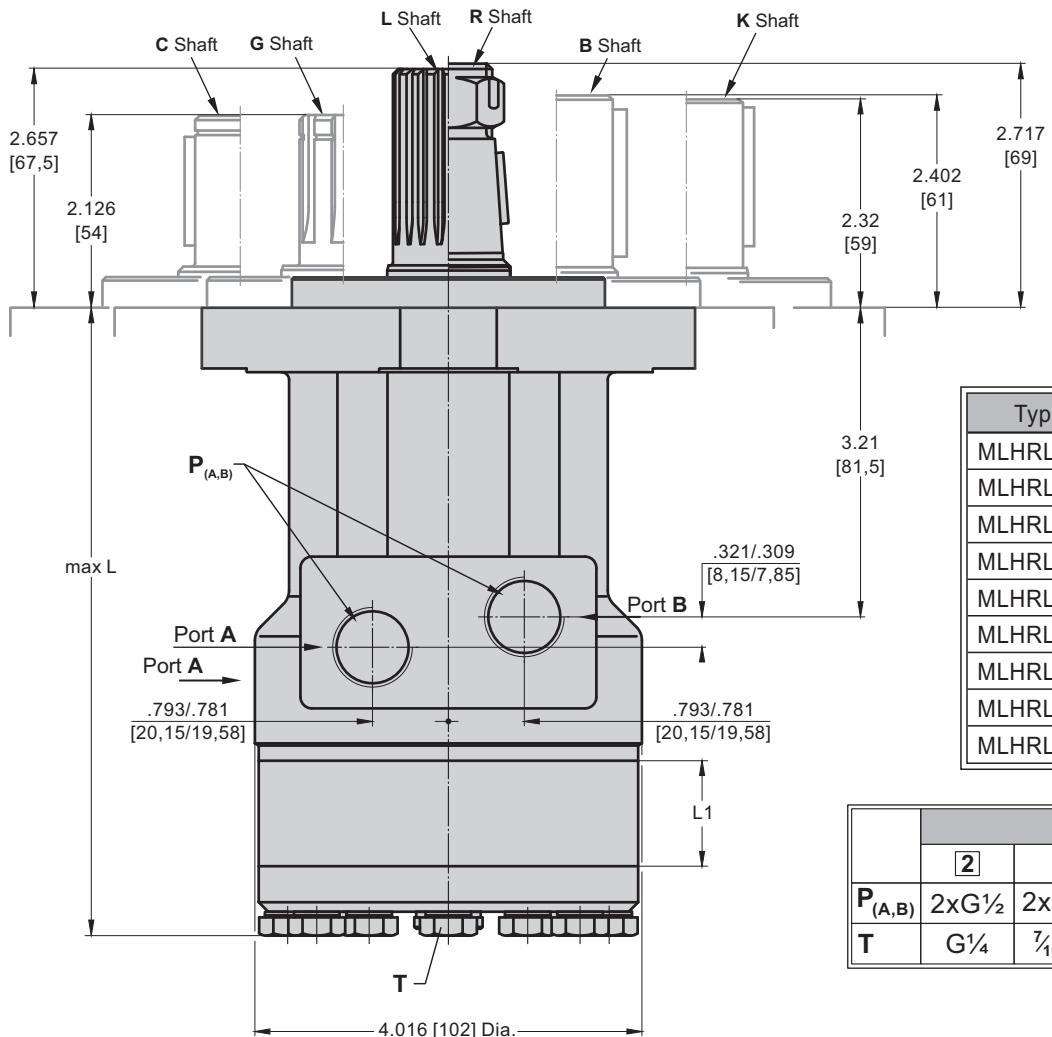


Shaft Dim.  
See Page 49

Type	L <sub>max</sub> , in [mm]	L <sub>1</sub> , in [mm]
MLHRL 50	8.80 [147,5]	.35 [ 9,0]
MLHRL 80	6.00 [152,5]	.55 [14,0]
MLHRL 100	6.12 [155,5]	.69 [17,4]
MLHRL 125	6.30 [160,0]	.86 [21,8]
MLHRL 160	6.54 [166,0]	1.09 [27,8]
MLHRL 200	6.81 [173,0]	1.37 [34,8]
MLHRL 250	7.15 [181,5]	1.71 [43,5]
MLHRL 315	7.60 [193,0]	2.16 [54,8]
MLHRL 400	8.17 [207,5]	2.73 [69,4]


	Versions		
	[2]	[4]	[5]
P <sub>(A,B)</sub>	2xG½	2x7/8 - 14 UNF	2x1/2 - 14 NPTF
T	G½	7/16 - 20 UNF	7/16 - 20 UNF

### Side Ports

#### Version [2], [5]



#### Version [4]




#### Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW



in [mm]

#### Reverse Rotation


Viewed from Shaft End

Port A Pressurized - CCW


Port B Pressurized - CW

## MOUNTING

### Square Mount (4 Holes)

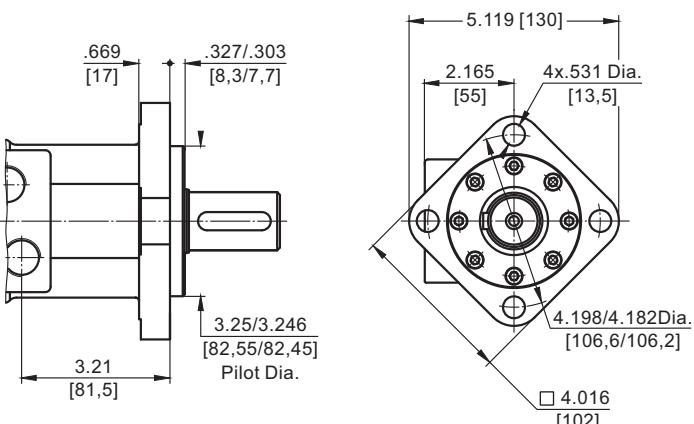

### F - Oval Mount (four Holes)

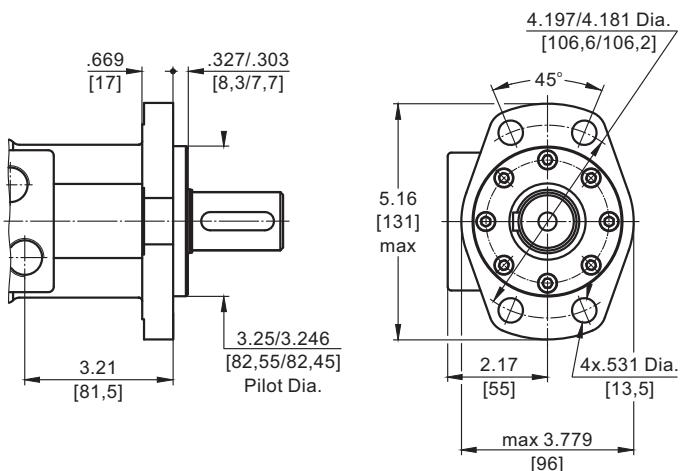

**ORDER CODE**

1    2    3    4    5    6

<b>MLHRL</b>						
--------------	--	--	--	--	--	--

**Pos.1 - Mounting Flange**

omit - Square mount, four holes

**F** - Oval mount, four holes

**Pos.2 - Displacement code\***

**50** - 3.14 in<sup>3</sup>/rev [ 51,5 cm<sup>3</sup>/rev]

**80** - 4.90 in<sup>3</sup>/rev [ 80,3 cm<sup>3</sup>/rev]

**100** - 6.09 in<sup>3</sup>/rev [ 99,8 cm<sup>3</sup>/rev]

**125** - 7.67 in<sup>3</sup>/rev [125,7 cm<sup>3</sup>/rev]

**160** - 9.74 in<sup>3</sup>/rev [159,6 cm<sup>3</sup>/rev]

**200** - 12.19 in<sup>3</sup>/rev [199,8 cm<sup>3</sup>/rev]

**250** - 15.26 in<sup>3</sup>/rev [250,1 cm<sup>3</sup>/rev]

**315** - 19.26 in<sup>3</sup>/rev [315,7 cm<sup>3</sup>/rev]

**400** - 24.40 in<sup>3</sup>/rev [397,0 cm<sup>3</sup>/rev]

**Pos.3 - Shaft Extensions\*\* [see page 49]**

**B** - ø32 straight, Parallel key

**K** - 1½" [31,75] straight, Parallel key

**L** - 1½" [31,75] splined 14T ANS B 92.1-1976

**R** - 1½" [31,75] tapered SAE J 501

**C** - ø25,4 straight, Parallel key

**G** - ø25,4 splined BS 2059 (SAE 6B)

**Pos.4 - Port Size/Type [standard manifold to each]**

**2** - side ports, 2xG1/2, G1/4, BSP thread, ISO 228

**4** - side ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF

**5** - side ports, 2x1/2-14 NPTF, 7/16-20 UNF

**Pos.5 - Special Features [see page 110]**

**Pos.6 - Design Series**

omit - Factory specified

**NOTES:**

\* For the Function Diagrams please look at "M+S Hydraulic" Catalogue for MLHR motors, pages 36÷40.


\*\* The permissible output torque for shafts must not be exceeded!

The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS HP

## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Grass cutting machinery etc.



## CONTENTS

Specification data .....	56÷57
Dimensions and mounting .....	58÷59
Shaft extensions .....	60÷61
Permissible shaft loads .....	62
Permissible shaft seal pressure ....	62
Order code .....	63

## OPTIONS

- » Model - Spool valve, gerotor
- » Flange mount
- » Side ports
- » Shafts - straight, splined and tapered
- » SAE and manifold ports
- » Speed sensoring
- » Other special features


## GENERAL

<b>Max. Displacement,</b> in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	24.16 [396]
<b>Max. Speed,</b> [RPM]	1408
<b>Max. Torque,</b> lb-in [daNm]	cont.: 3665 [41,4] int.: 4520 [51,1]
<b>Max. Output,</b> HP [kW]	16.1 [12]
<b>Max. Pressure Drop,</b> PSI [bar]	cont.: 1815 [125] int.: 2540 [175]
<b>Max. Oil Flow,</b> GPM [lpm]	20 [75]
<b>Min. Speed,</b> [RPM]	10
<b>Pressure fluid</b>	Mineral based - HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °F [°C]	-40 ÷ 284 [-40 ÷ 140]
<b>Optimal Viscosity range,</b> SUS [mm <sup>2</sup> /s]	98 ÷ 347 [20 ÷ 75]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure Losses

Pressure drop PSI [bar]	Viscosity SUS [mm <sup>2</sup> /s]	Oil flow in drain line GPM [lpm]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]

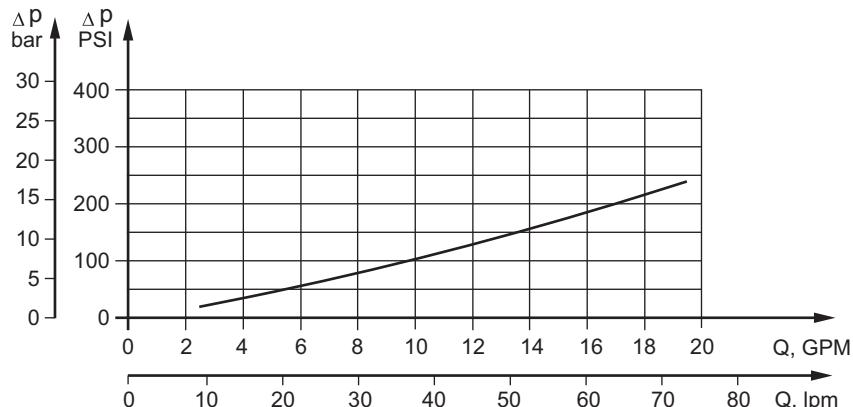

## SPECIFICATION DATA

Type	HP 25	HP 32	HP 40	HP 50	HP 80	HP 100
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	1.73 [28,4]	2.11 [34,5]	2.47 [40,5]	3.02 [49,5]	4.83 [79,2]	6.04 [99,0]
<b>Max. Speed, [RPM]</b>	Cont.	1055	1160	900	909	758
	Int.*	1600	1300	1110	1111	947
<b>Max. Torque, lb-in [daNm]</b>	Cont.	290 [3,3]	460 [5,2]	575 [6,5]	717 [8,1]	1141 [12,9]
	Int.*	400 [4,5]	620 [7,0]	795 [9,0]	990 [11,2]	1585 [17,9]
	Peak**	610 [6,9]	780 [8,8]	975 [11]	1210 [13,7]	1930 [21,8]
<b>Max. Output, HP [kW]</b>	Cont.	4.60 [3,4]	7.5 [5,6]	7.5 [5,6]	11.3 [8,4]	11.3 [8,4]
	Int.*	8.2 [6,1]	11.3 [8,4]	11.5 [8,6]	14.1 [10,5]	16 [12]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont.	1450 [100]	1815 [125]	1815 [125]	1815 [125]	1815 [125]
	Int.*	2030 [140]	2465 [170]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont.	8 [30]	10.5 [40]	10.5 [40]	11.9 [45]	15.9 [60]
	Int.*	10.5 [40]	11.9 [45]	11.9 [45]	14.5 [55]	19.8 [75]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Return Pres- sure with Drain Line, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	145 [10]	145 [10]	145 [10]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont.	265 [3,0]	425 [4,8]	566 [6,4]	655 [7,4]	1045 [11,8]
	At max.press. drop Int.*	362 [4,1]	565 [6,4]	725 [8,2]	900 [10,2]	1440 [16,3]
<b>Min. Speed***, [RPM]</b>		20	15	10	10	10
<b>Weight, lb [kg]</b>	HP	11.5 [5,2]	11.5 [5,2]	11.5 [5,2]	11.7 [5,3]	11.9 [5,4]
	HPQ	10.6 [4,8]	10.6 [4,8]	10.6 [4,8]	10.8 [4,9]	11.25 [5,1]
						11.69 [5,3]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

**SPECIFICATION DATA (continued)**

Type	HP 125	HP 160	HP 200	HP 250	HP 315	HP 400
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	7.55 [123,8]	9.66 [158,4]	12.1 [198]	15.1 [247,5]	19.3 [316,8]	24.16 [396]
<b>Max. Speed, [RPM]</b>	Cont.	485	379	303	242	189
	Int.*	606	473	379	303	237
<b>Max. Torque, lb-in [daNm]</b>	Cont.	1790 [20,2]	2105 [23,8]	2400 [27,1]	2860 [32,3]	3290 [37,2]
	Int.*	2470 [27,9]	2805 [31,7]	3390 [38,3]	3675 [41,5]	4340 [49,0]
	Peak**	3025 [34,2]	3870 [43,7]	4830 [54,6]	4830 [54,6]	5500 [62,1]
<b>Max. Output HP [kW]</b>	Cont.	11.3 [8,4]	10.3 [7,7]	9.5 [7,1]	9 [6,7]	8.2 [6,1]
	Int.*	16 [12]	16 [12]	16 [12]	14.3 [10,7]	13.1 [9,8]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont.	1815 [125]	1670 [115]	1520 [105]	1450 [100]	1305 [90]
	Int.*	2540 [175]	2250 [155]	2175 [150]	1885 [130]	1740 [120]
	Peak**	3260 [225]	3260 [225]	3260 [225]	2610 [180]	2320 [160]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont.	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]
	Int.*	19.8 [75]	19.8 [75]	19.8 [75]	19.8 [75]	19.8 [75]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Return Pres- sure with Drain Line, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	100 [7]	100 [7]	100 [7]
<b>Min. Starting</b>	At max.press. drop Cont.	1630 [18,4]	1910 [21,6]	2190 [24,7]	2600 [29,4]	3000 [33,9]
<b>Torque, lb-in [daNm]</b>	At max.press. drop Int.*	2250 [25,1]	2550 [28,8]	3090 [34,9]	3345 [37,8]	3950 [44,6]
<b>Min. Speed***, [RPM]</b>		10	10	10	10	10
<b>Weight, lb [kg]</b>	HP	12.6 [5,7]	13.0 [5,9]	13.4 [6,1]	13.9 [6,3]	14.6 [6,6]
	HPQ	11.91 [5,4]	12.35 [5,6]	12.79 [5,8]	13.23 [6,0]	13.89 [6,3]
						14.8 [6,7]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.


\*\*\* For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## DIMENSIONS and MOUNTING DATA

HPQ

HP

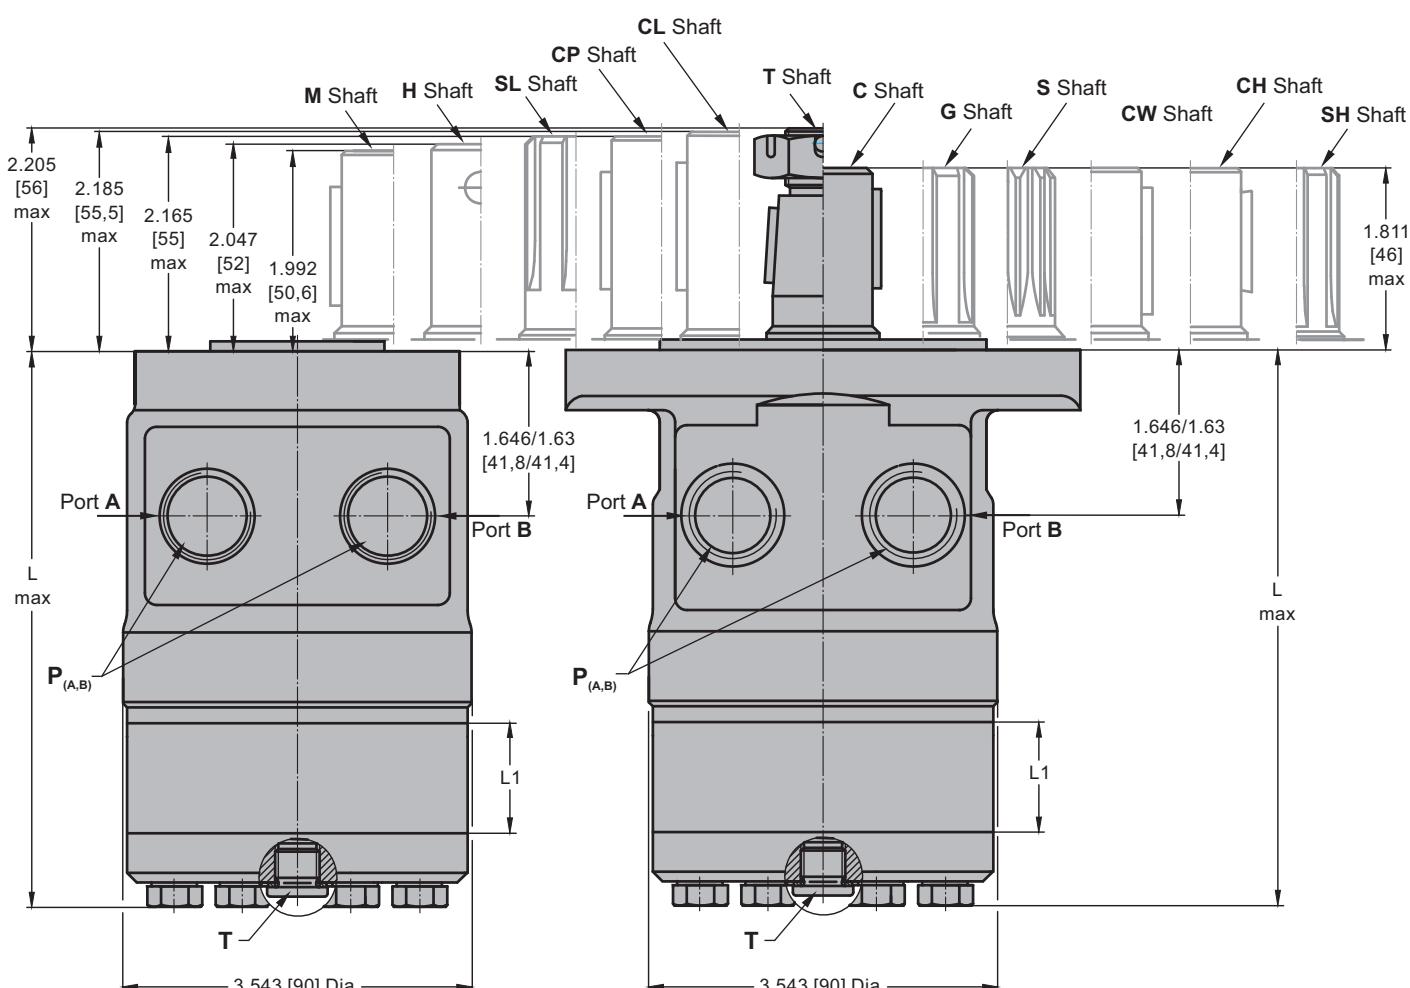

Type	$L_{max}$ , in [mm]	$L_1$ , in [mm]
HP(Q) 25	4.69 [119,0]	.21 [5,20]
HP(Q) 32	4.72 [120,0]	.25 [6,30]
HP(Q) 40	4.76 [121,0]	.29 [7,40]
HP(Q) 50	4.74 [120,5]	.26 [6,67]
HP(Q) 80	4.90 [124,5]	.42 [10,67]
HP(Q) 100	5.00 [127,0]	.52 [13,33]
HP(Q) 125	5.14 [130,5]	.66 [16,67]
HP(Q) 160	5.32 [135,0]	.84 [21,33]
HP(Q) 200	5.53 [140,5]	1.05 [26,67]
HP(Q) 250	5.79 [147,0]	1.31 [33,33]
HP(Q) 315	6.16 [156,5]	1.68 [42,67]
HP(Q) 400	6.57 [167,0]	2.10 [53,33]

Shaft Dim.  
See Page 60 and 61

Flange Dim.  
See Page 59

Port Dim.  
See Page 59

## Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW


## Reverse Rotation

Viewed from Shaft End

Port A Pressurized - CCW

Port B Pressurized - CW


	Versions				
	[1]	[2]	[3]	[4]	[5]
C	4x $\frac{5}{16}$ - 18 UNF	-	4xM8	-	-
P <sub>(A,B)</sub>	2x.39 Dia. [2x10]	2xG $\frac{1}{2}$	2x.39 Dia. [2x10]	2x $\frac{7}{8}$ - 14 UNF	2x $\frac{1}{2}$ - 14 NPTF
T	$\frac{7}{16}$ - 20 UNF	G $\frac{1}{4}$	$\frac{7}{16}$ - 20 UNF	$\frac{7}{16}$ - 20 UNF	$\frac{7}{16}$ - 20 UNF




in [mm]

## MOUNTING

SAE A Flange

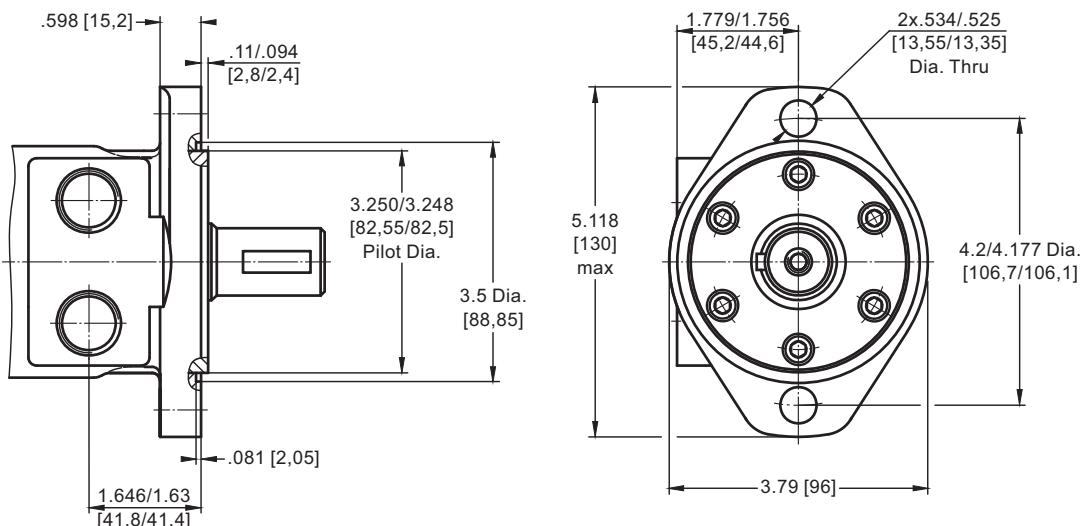


Q - Square Flange

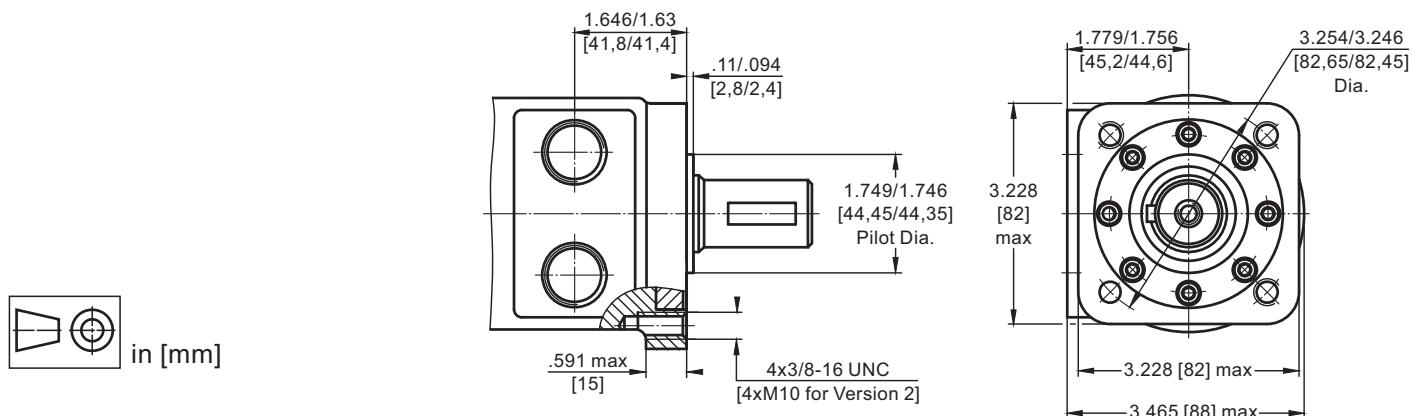


## PORTS

Side Ports


Version 1, 3

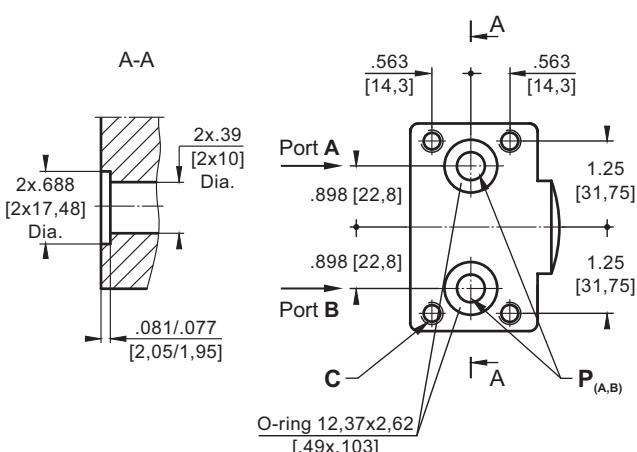

Version 4



Version 2, 5



## Standard Rotation

Viewed from Shaft End  
Port A Pressurized - CW  
Port B Pressurized - CCW

## Reverse Rotation


Viewed from Shaft End  
Port A Pressurized - CCW  
Port B Pressurized - CW

## Versions


	1	2	3	4	5
C	4x $\frac{5}{16}$ - 18 UNF	-	4xM8	-	-
P <sub>(A,B)</sub>	2x.39 Dia. [2x10]	2xG $\frac{1}{2}$	2x.39 Dia. [2x10]	2x $\frac{7}{8}$ - 14 UNF	2x $\frac{1}{2}$ - 14 NPTF
T	$\frac{7}{16}$ - 20 UNF	G $\frac{1}{4}$	$\frac{7}{16}$ - 20 UNF	$\frac{7}{16}$ - 20 UNF	$\frac{7}{16}$ - 20 UNF

**SHAFT EXTENSIONS for HP and HR MOTORS**


**C** - 1" [25,4] straight, Woodruff key  $\frac{1}{4}$ "x1" SAE J502  
Max. Torque 3009 lb-in [34 daNm]

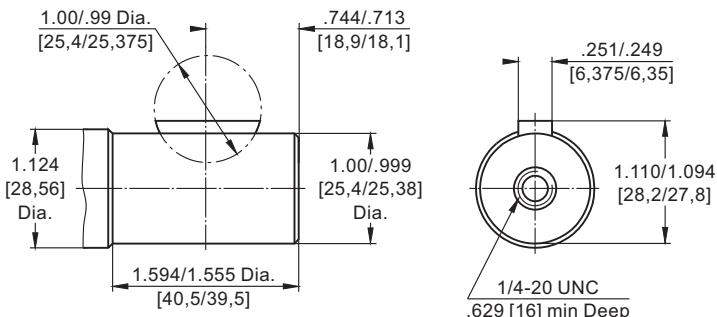


**H** - 1" [25,4] straight, w/ .315 [8] Crosshole  
Max. Torque 3009 lb-in [34 daNm]

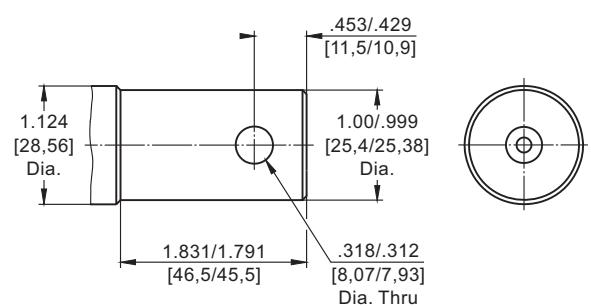



**G** - 1" [25,4] splined, SAE 6B  
Max. Torque 3540 lb-in [40 daNm]

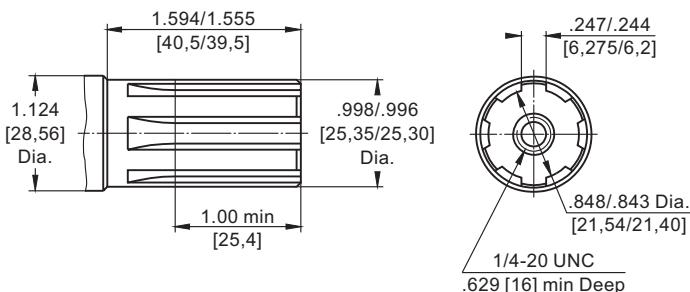

**S** -  $\frac{7}{8}$ " [22,2] splined 13T, ANS B 92.1-1976  
Max. Torque 3200 lb-in [36 daNm]

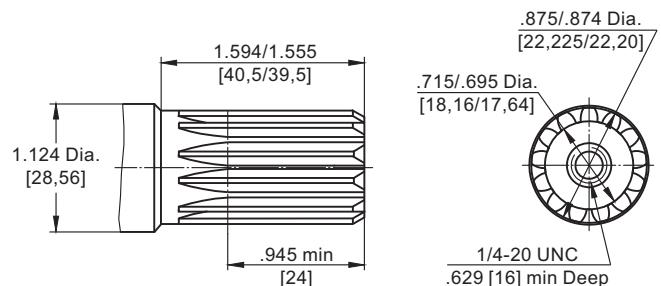

**T** - 1" [25,4] tapered SAE J501, Parallel key  $\frac{3}{16}$ "x $\frac{3}{16}$ "x $\frac{3}{4}$ "  
Max. Torque 3540 lb-in [40 daNm]

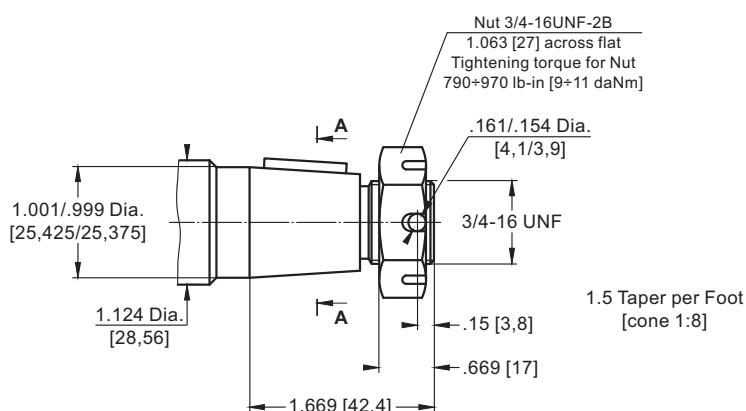


Requirement max. Torque must not be exceeded.


in [mm]

## SHAFT EXTENSIONS for HP and HR MOTORS


**M** - ø25 straight, Parallel key A8x7x32 DIN 6885  
Max. Torque 3009 lb-in [34 daNm]

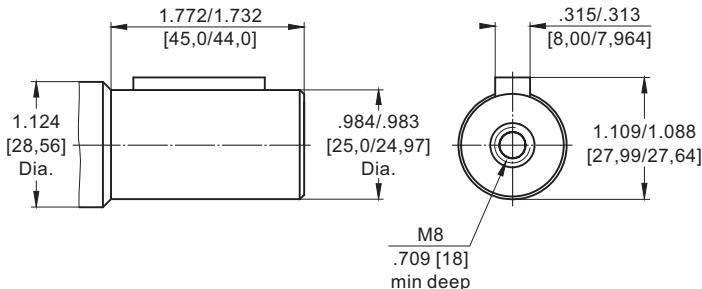


**CP** - ø25 straight, Parallel key A8x7x32 DIN 6885  
Max. Torque 3009 lb-in [34 daNm]

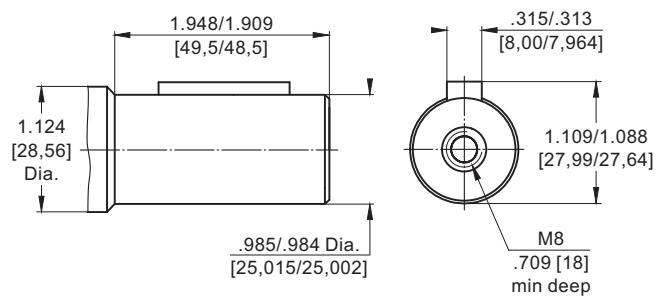


**CL** - 1" [25,4] straight, Parallel key 1/4"x1/4"x1 1/4" BS46  
Max. Torque 3009 lb-in [34 daNm]

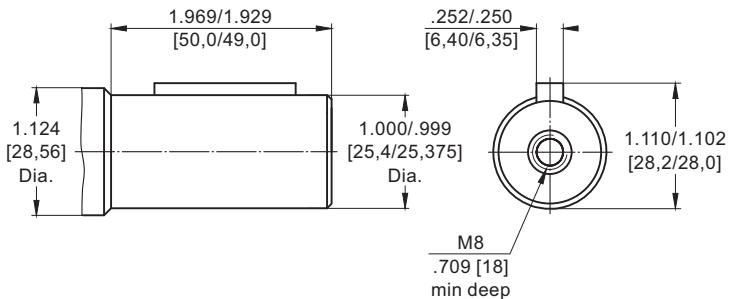


**CW** - ø25 straight, Parallel key A8x7x32 DIN 6885  
Max. Torque 3009 lb-in [44 daNm]

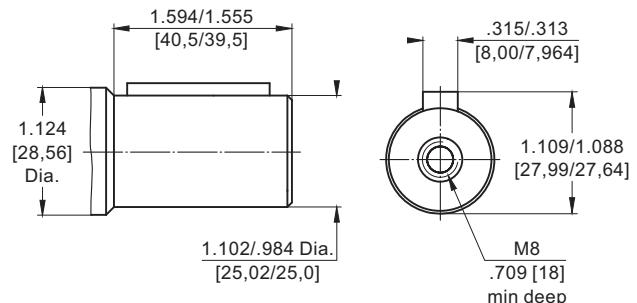


**CH** - ø25 straight, Woodruff key 1/4"x1" SAE J502  
Max. Torque 3009 lb-in [34 daNm]

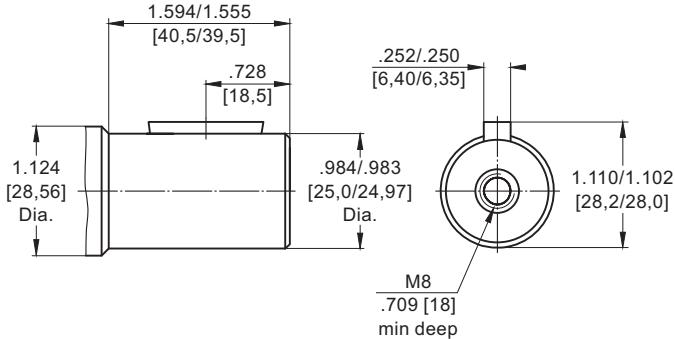

**SH** - 1" [25,4] splined, SAE 6B  
Max. Torque 3540 lb-in [40 daNm]

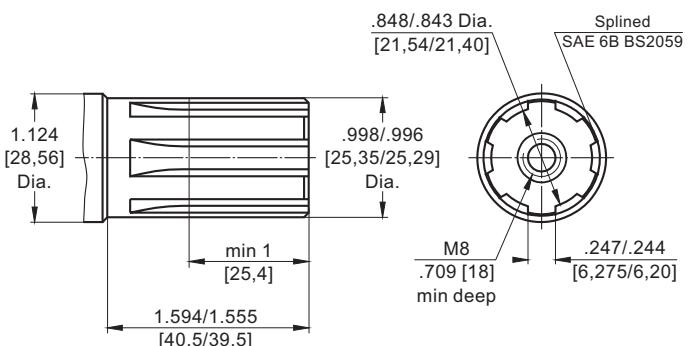

**SL** - 1" [25,4] splined, SAE 6B  
Max. Torque 3540 lb-in [40 daNm]

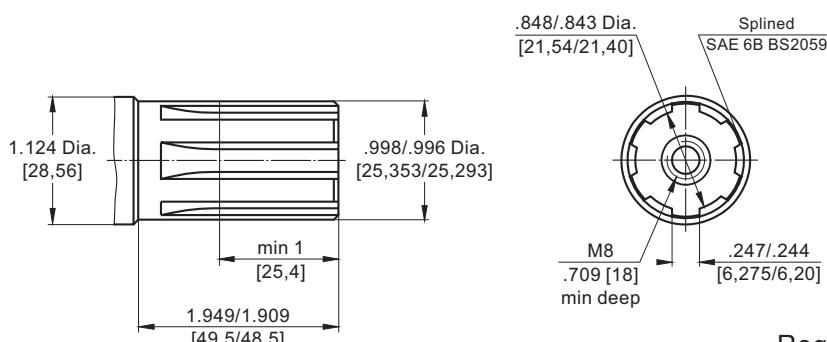

Requirement max. Torque must not be exceeded.

## PERMISSIBLE SHAFT LOADS for HP and HR MOTORS

The permissible radial shaft load  $P_{rad}$  depends on the speed RPM and distance  $L$  from the point of load to the mounting flange.

$$\text{Radial Shaft Load } P_{rad} = \frac{650}{\text{RPM}} \times \frac{23200}{89+L} \text{ ,daN*}$$



\*  $L$  - in mm.

$$\text{Radial Shaft Load: } P_{rad} = \frac{1460}{\text{RPM}} \times \frac{913}{3.5+L} \text{ ,lbs*}$$

\*  $L$  - in inch

RPM < 200 => max Prad=1460 lbs [650 daN]


RPM ≥ 200;  $L < 2.2$  in. [55 mm]

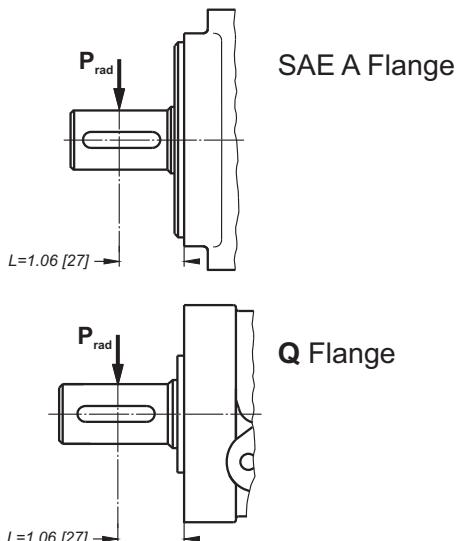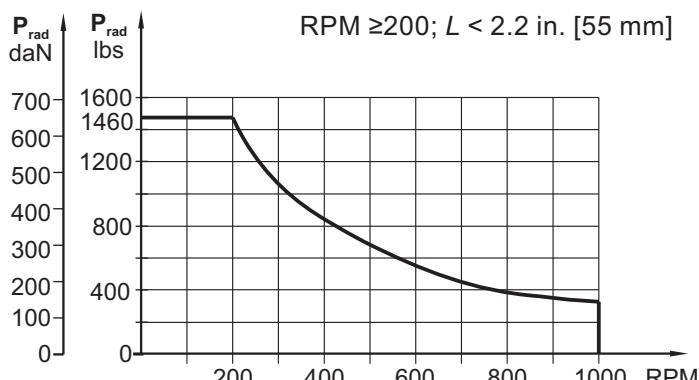

## MAX. PERMISSIBLE SHAFT SEAL PRESSURE for HP and HR MOTORS

HP...1 and HR...1 motors without drain connection:	HP... and HR... motors with drain connection:	HP...K and HR...K motors with check valves and drain connection:	HP...K1 and HR...K1 motors with check valves and without drain connection:
The shaft seal pressure equals the average of input pressure and return pressure. $P_{seal} = \frac{P_{input} + P_{return}}{2}$	The shaft seal pressure equals the pressure in the drain line.	The shaft seal pressure equals the pressure in the drain line.	The shaft seal pressure never exceeds the pressure in the return line.

### Max. return pressure without drain line or max. pressure in the drain line

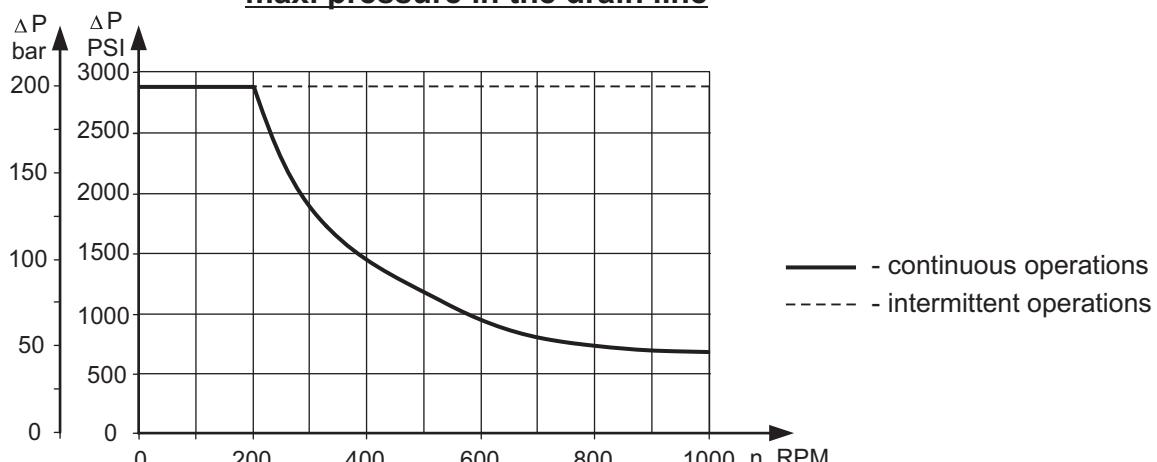

## ORDER CODE

<b>H P</b>		1	2	3	4	5	6	7	8	9
------------	--	---	---	---	---	---	---	---	---	---

**Pos.1 - Mounting Flange**

omit - SAE A, two holes

**Q** - Square, four bolts

**Pos.2 - Displacement code\***

<b>25</b>	- 1.73 in <sup>3</sup> /rev [ 28,4 cm <sup>3</sup> /rev]
<b>32</b>	- 2.11 in <sup>3</sup> /rev [ 34,5 cm <sup>3</sup> /rev]
<b>40</b>	- 2.47 in <sup>3</sup> /rev [ 40,5 cm <sup>3</sup> /rev]
<b>50</b>	- 3.02 in <sup>3</sup> /rev [ 49,5 cm <sup>3</sup> /rev]
<b>80</b>	- 4.83 in <sup>3</sup> /rev [ 79,2 cm <sup>3</sup> /rev]
<b>100</b>	- 6.04 in <sup>3</sup> /rev [ 99,0 cm <sup>3</sup> /rev]
<b>125</b>	- 9.66 in <sup>3</sup> /rev [123,8 cm <sup>3</sup> /rev]
<b>160</b>	- 9.74 in <sup>3</sup> /rev [158,4 cm <sup>3</sup> /rev]
<b>200</b>	- 12.10 in <sup>3</sup> /rev [198,0 cm <sup>3</sup> /rev]
<b>250</b>	- 15.10 in <sup>3</sup> /rev [247,5 cm <sup>3</sup> /rev]
<b>315</b>	- 19.30 in <sup>3</sup> /rev [316,8 cm <sup>3</sup> /rev]
<b>400</b>	- 24.16 in <sup>3</sup> /rev [396,0 cm <sup>3</sup> /rev]

**Pos.3 - Shaft Extensions\*\***

<b>C</b>	- 1" [25,4] straight, Woodruff key
<b>G</b>	- 1" [25,4] SAE 6B Splined
<b>H</b>	- 1" [25,4] straight, w/.315 [8] Cross-hole
<b>S</b>	- 7/8" [22,2] 13T Splined
<b>T</b>	- 1" [25,4] SAE J501 Tapered
<b>M</b>	- ø 25 straight, Parallel key A8x7x32 DIN 6885
<b>CP</b>	- ø 25 straight, Parallel key A8x7x32 DIN 6885
<b>CL</b>	- 1" [25,4] straight, Parallel key 1/4"x1/4"x1/4" BS46
<b>CW</b>	- ø 25 straight, Parallel key A8x7x32 DIN 6885
<b>CH</b>	- ø 25 straight, Woodruff key 1/4"x1" SAE J502
<b>SH</b>	- 1" [25,4], SAE 6B Splined
<b>SL</b>	- 1" [25,4], SAE 6B Splined

**Pos.4 - Port Size/Type** [standard manifold to each]

**1** - side ports, Manifold [5/16-18 UNC Mounting Threads], 7/16-20 UNF

**2** - side ports, 2xG1/2, G1/4

**3** - side ports, Manifold [M8 Mounting Threads], 7/16-20 UNF

**4** - side ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF

**5** - side ports, 2x1/2-14 NPTF, 7/16-20 UNF

**Pos.5 - Shaft Seal Version** [see page 60]

**U** - high pressure shaft seal

**Pos.6 - Check Valves**

omit - without check valves

**K** - with check valves

**Pos.7 - Drain Port**

omit - with drain port

**1** - without drain port

**Pos.8 - Special Features** [see page 110]

**Pos.9 - Design Series**

omit - Factory specified

**NOTES:**

\* For the Function Diagrams please look at "M+S Hydraulic" Catalogue for MLHP motors, **pages 18÷24**.


\*\* The permissible output torque for shafts must not be exceeded!

The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS HR

## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Grass cutting machinery etc.



## CONTENTS

Specification data .....	65
Dimensions and mounting .....	66÷67
Shaft extensions .....	60÷61
Permissible shaft loads .....	62
Permissible shaft seal pressure ....	62
Order code .....	68

## OPTIONS

- » Model - Spool valve, roll-gerotor
- » Flange mount
- » Side ports
- » Shafts - straight, splined and tapered
- » SAE and manifold ports
- » Speed sensoring
- » Other special features


## GENERAL

<b>Max. Displacement,</b> in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	23.56 [386]
<b>Max. Speed,</b> [RPM]	971
<b>Max. Torque,</b> lb-in [daNm]	cont.: 3980 [45,0] int.: 4560 [51,5]
<b>Max. Output,</b> HP [kW]	16.2 [12,1]
<b>Max. Pressure Drop,</b> PSI [bar]	cont.: 2030 [140] int.: 2540 [175]
<b>Max. Oil Flow,</b> GPM [lpm]	20 [75]
<b>Min. Speed,</b> [RPM]	10
<b>Pressure fluid</b>	Mineral based - HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °F [°C]	-40 ÷ 284 [-40 ÷ 140]
<b>Optimal Viscosity range, SUS [mm<sup>2</sup>/s]</b>	98 ÷ 347 [20 ÷ 75]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure Losses

Pressure drop PSI [bar]	Viscosity SUS [mm <sup>2</sup> /s]	Oil flow in drain line GPM [lpm]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]

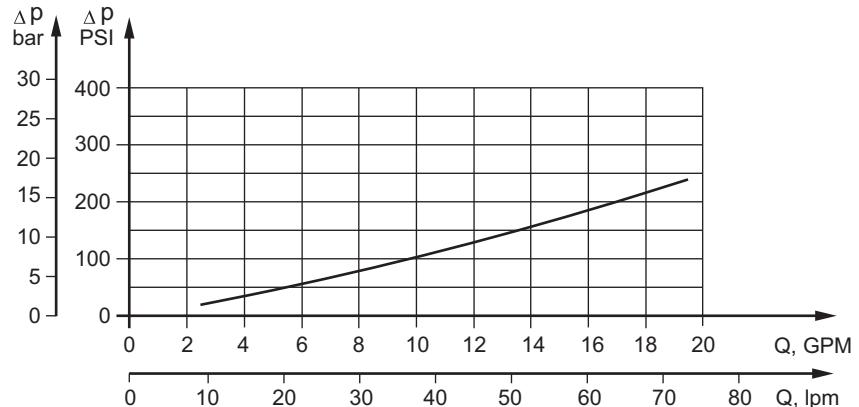

## SPECIFICATION DATA

Type	HR 50	HR 80	HR 100	HR 125	HR 160	HR 200	HR 250	HR 315	HR 400
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	3.14 [51,5]	4.90 [80,3]	6.09 [99,8]	7.48 [122,5]	9.37 [153,6]	11.95 [195,8]	14.95 [245]	18.67 [306]	23.56 [386]
<b>Max. Speed, [RPM]</b>	Cont.	777	747	601	490	391	306	245	196
	Int.*	971	934	752	612	488	383	306	245
<b>Max. Torque, lb-in [daNm]</b>	Cont.	870 [9,8]	1415 [16,0]	1725 [19,5]	2125 [24,0]	2655 [30,0]	3097 [35,0]	3275 [37,0]	3720 [42,0]
	Int.*	1080 [12,2]	1680 [19,0]	2090 [23,6]	2570 [29,0]	3220 [36,4]	3640 [41,1]	3965 [44,8]	4380 [49,5]
	Peak**	1260 [14,2]	1965 [22,2]	2435 [27,5]	2990 [33,8]	3750 [42,4]	4780 [54,0]	4790 [54,1]	5310 [60,0]
<b>Max. Output, HP [kW]</b>	Cont.	8.7 [6,5]	13.1 [9,8]	13.1 [9,8]	13.1 [9,8]	13.1 [9,8]	11.7 [8,7]	9.8 [7,3]	9.4 [7,0]
	Int.*	10.9 [8,1]	16.2 [12,1]	16.2 [12,1]	16.2 [12,1]	16.2 [12,1]	14.3 [10,7]	12.5 [9,3]	10.6 [7,9]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	1885 [130]	1595 [110]	1450 [100]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2250 [155]	1960 [135]	1740 [120]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	2610 [180]	2320 [160]	1880 [130]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont.	10.5 [40]	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]	15.9 [60]
	Int.*	13.2 [50]	20 [75]	20 [75]	20 [75]	20 [75]	20 [75]	20 [75]	20 [75]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Return Pressure with Drain Line, PSI [bar]</b>	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	145 [10]	145 [10]	145 [10]	145 [10]	102 [7]	102 [7]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont.	710 [7,9]	1090 [12,3]	1355 [15,3]	1665 [18,8]	2090 [23,6]	2370 [26,8]	2495 [28,2]	2965 [33,5]
	At max.press. drop Int.*	870 [9,8]	1345 [15,2]	1670 [18,9]	2055 [23,2]	2575 [29,1]	2910 [32,9]	3170 [35,8]	3375 [38,1]
<b>Min. Speed***, [RPM]</b>		10	10	10	10	10	10	10	10
<b>Weight, lb [kg]</b>	HR	13.45 [6,1]	14.11 [6,4]	14.55 [6,6]	14.55 [6,6]	15.21 [6,9]	15.87 [7,2]	16.53 [7,5]	17.64 [8,0]
	HRQ	12.57 [5,7]	13.23 [6,0]	13.67 [6,2]	13.67 [6,2]	14.33 [6,5]	14.77 [6,7]	15.65 [7,1]	16.76 [7,6]
									18.08 [8,2]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.


\*\*\* For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## DIMENSIONS and MOUNTING DATA for HR

HRQ

HR

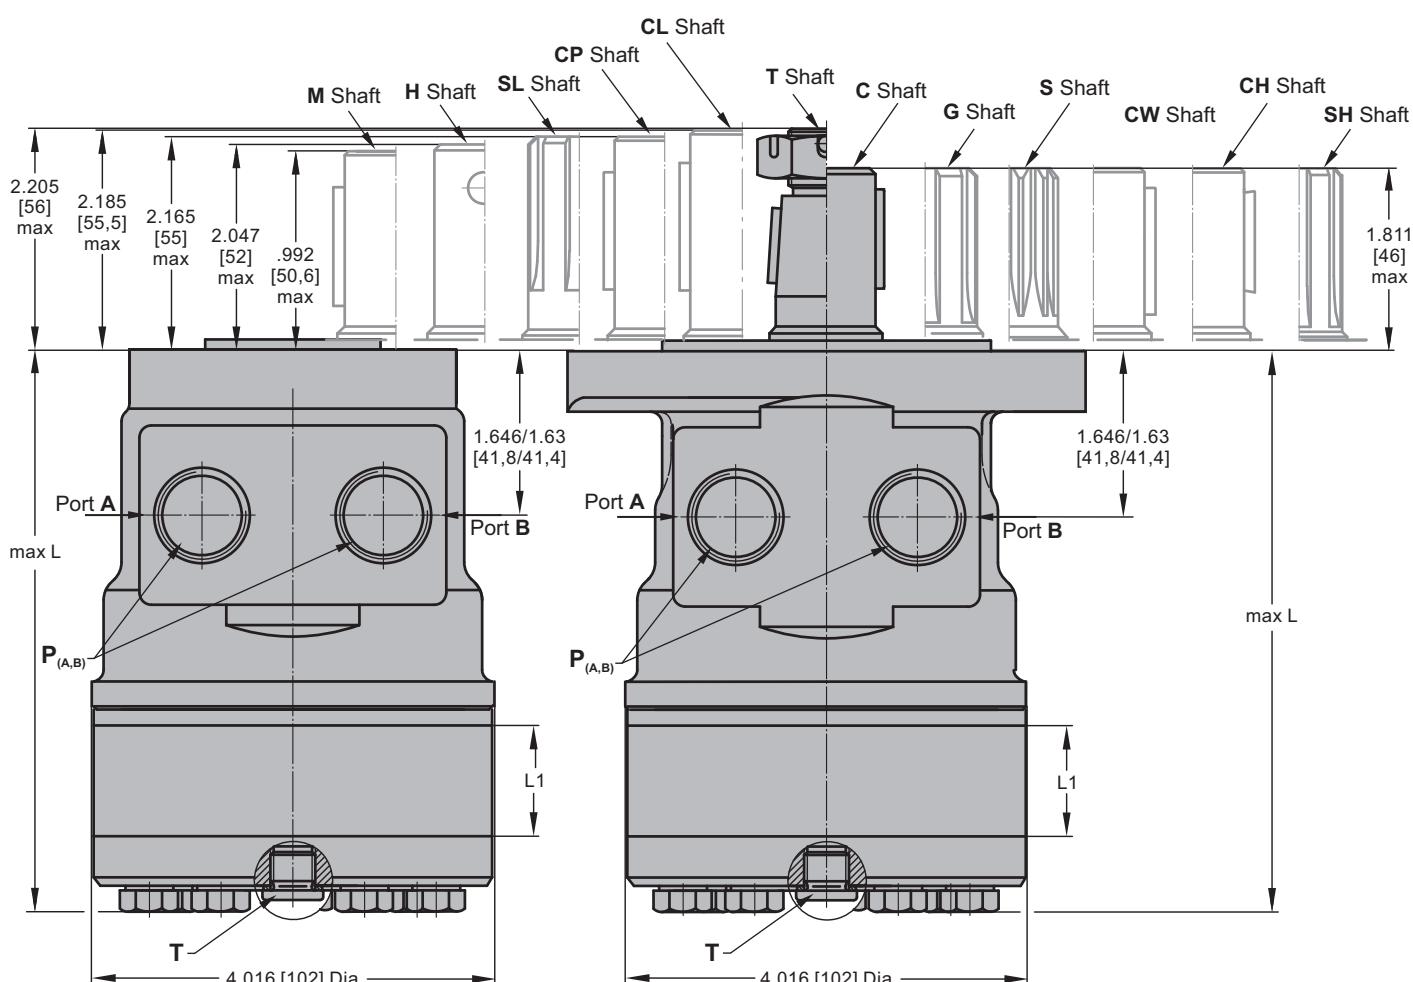

Shaft Dim.  
See Page 60 and 61

## Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

## Reverse Rotation

Viewed from Shaft End

Port A Pressurized - CCW

Port B Pressurized - CW

Flange Dim.  
See Page 67

Type	L <sub>max</sub> , in [mm]	L <sub>1</sub> , in [mm]
HR(Q) 50	4.85 [123,3]	.35 [ 9,0]
HR(Q) 80	5.05 [128,3]	.55 [14,0]
HR(Q) 100	5.19 [131,7]	.69 [17,4]
HR(Q) 125	5.19 [131,7]	.69 [17,4]
HR(Q) 160	5.36 [136,1]	.86 [21,8]
HR(Q) 200	5.59 [142,1]	1.09 [27,8]
HR(Q) 250	5.87 [149,1]	1.37 [34,8]
HR(Q) 315	6.21 [157,8]	1.71 [43,5]
HR(Q) 400	6.66 [169,1]	2.16 [54,8]


Port Dim.  
See Page 67




in [mm]

## MOUNTING

## SAE A Flange

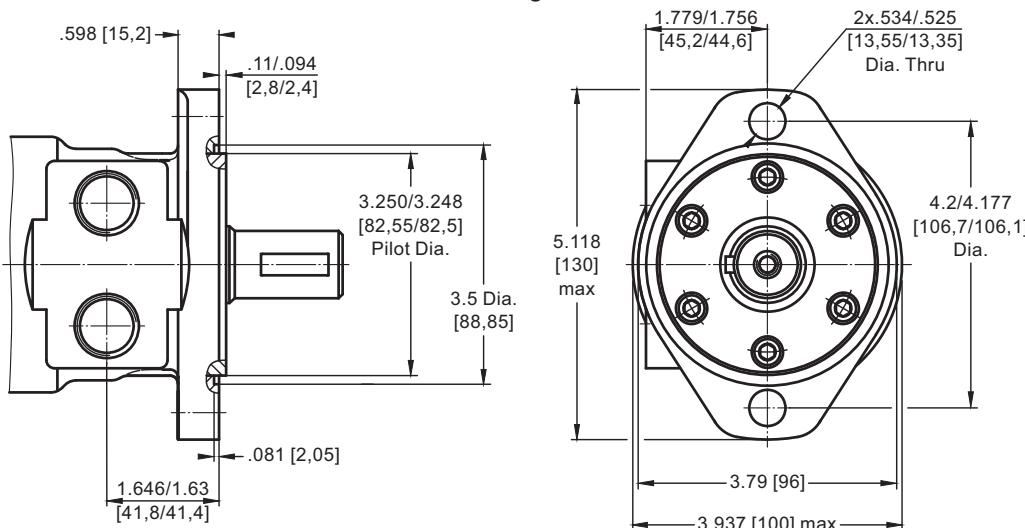


## Q - Square Flange

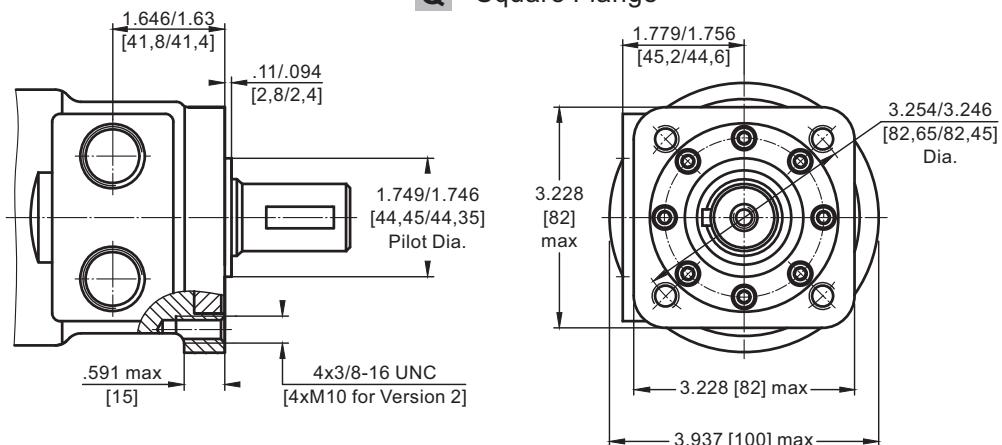


## PORTS

## Side Ports


## Version 1, 3

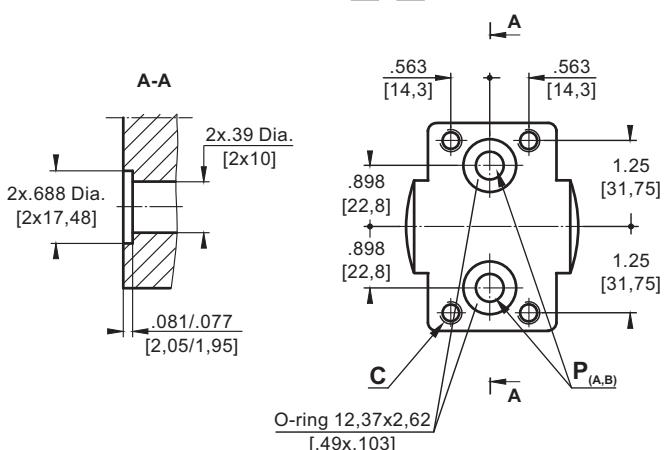


## Version 4

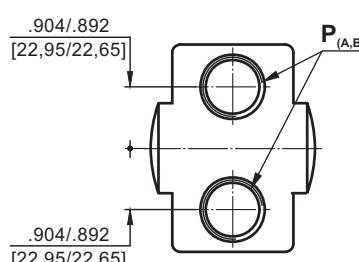

## Version 2, 5



	Versions				
	1	2	3	4	5
C	4x $\frac{5}{16}$ - 18 UNF	-	4xM8	-	-
P <sub>(A,B)</sub>	2x.39 Dia. [2x10]	2xG $\frac{1}{2}$	2x.39 Dia. [2x10]	2x $\frac{7}{8}$ - 14 UNF	2x $\frac{1}{2}$ - 14 NPTF
T	$\frac{7}{16}$ - 20 UNF	G $\frac{1}{4}$	$\frac{7}{16}$ - 20 UNF	$\frac{7}{16}$ - 20 UNF	$\frac{7}{16}$ - 20 UNF



in [mm]

## ORDER CODE

<b>HR</b>	1	2	3	4	5	6	7	8	9
-----------	---	---	---	---	---	---	---	---	---

**Pos.1 - Mounting Flange**

omit - SAE A, two holes

**Q** - Square, four bolts

**Pos.2 - Displacement code\***

<b>50</b>	- 3.14 in <sup>3</sup> /rev [ 51,5 cm <sup>3</sup> /rev]
<b>80</b>	- 4.90 in <sup>3</sup> /rev [ 80,3 cm <sup>3</sup> /rev]
<b>100</b>	- 6.09 in <sup>3</sup> /rev [ 99,8 cm <sup>3</sup> /rev]
<b>125</b>	- 7.48 in <sup>3</sup> /rev [122,5 cm <sup>3</sup> /rev]
<b>160</b>	- 9.37 in <sup>3</sup> /rev [153,6 cm <sup>3</sup> /rev]
<b>200</b>	- 11.95 in <sup>3</sup> /rev [195,8 cm <sup>3</sup> /rev]
<b>250</b>	- 14.95 in <sup>3</sup> /rev [245,0 cm <sup>3</sup> /rev]
<b>315</b>	- 18.67 in <sup>3</sup> /rev [306,0 cm <sup>3</sup> /rev]
<b>400</b>	- 23.56 in <sup>3</sup> /rev [386,0 cm <sup>3</sup> /rev]

**Pos.3 - Shaft Extensions\*\* [see pages 60 and 61]**

<b>C</b>	- 1" [25,4] straight, Woodruff key
<b>G</b>	- 1" [25,4] SAE 6B Splined
<b>H</b>	- 1" [25,4] straight, w/.315 [8] Cross-hole
<b>S</b>	- 7/8" [22,2] 13T Splined
<b>T</b>	- 1" [25,4] SAE J501 Tapered
<b>M</b>	- ø 25 straight, Parallel key A8x7x32 DIN 6885
<b>CP</b>	- ø 25 straight, Parallel key A8x7x32 DIN 6885
<b>CL</b>	- 1" [25,4] straight, Parallel key 1/4"x1/4"x1/4" BS46
<b>CW</b>	- ø 25 straight, Parallel key A8x7x32 DIN 6885
<b>CH</b>	- ø 25 straight, Woodruff key 1/4"x1" SAE J502
<b>SH</b>	- 1" [25,4], SAE 6B Splined
<b>SL</b>	- 1" [25,4], SAE 6B Splined

**Pos.4 - Port Size/Type** [standard manifold to each]

**1** - side ports, Manifold [5/16-18 UNC Mounting Threads], 7/16-20 UNF

**2** - side ports, 2xG1/2, G1/4

**3** - side ports, Manifold [M8 Mounting Threads], 7/16-20 UNF

**4** - side ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF

**5** - side ports, 2x1/2-14 NPTF, 7/16-20 UNF

**Pos.5 - Shaft Seal Version** [see page 62]

**U** - high pressure shaft seal

**Pos.6 - Check Valves**

omit - without check valves

**K** - with check valves

**Pos.7 - Drain Port**

omit - with drain port

**1** - without drain port

**Pos.8 - Special Features** [see page 110]

**Pos.9 - Design Series**

omit - Factory specified

**NOTES:**

\* For the Function Diagrams please look at "M+S Hydraulic" Catalogue for MLHR motors, pages 36÷40.

\*\* The permissible output torque for shafts must not be exceeded!


The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS MLHRW



## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Grass cutting machinery etc.



## CONTENTS

Specification data .....	70
Function diagrams .....	71÷75
Permissible shaft seal pressure .....	75
Dimensions and mounting .....	76
Permissible shaft loads .....	77
Shaft extensions .....	77
Order code .....	77

## OPTIONS

- » Model - Spool valve, roll-gerotor
- » Wheel mount
- » Shafts - straight and tapered
- » Shaft seal for high and low pressure
- » SAE, Metric and BSPP ports
- » Other special features


## GENERAL

<b>Max. Displacement,</b> in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	24.4 [397]
<b>Max. Speed,</b> [RPM]	1029
<b>Max. Torque,</b> lb-in [daNm]	cont.: 5400 [61] int.: 6100 [69]
<b>Max. Output,</b> HP [kW]	20.1 [15]
<b>Max. Pressure Drop,</b> PSI [bar]	cont.: 2540 [175] int.: 2900 [200]
<b>Max. Oil Flow,</b> GPM [lpm]	19.8 [90]
<b>Min. Speed,</b> [RPM]	10
<b>Pressure fluid</b>	Mineral based - HLP (DIN 51524) or HM (ISO 6743/4)
<b>Temperature range,</b> °F °C	-40 ÷ 284 [-40 ÷ 140]
<b>Optimal Viscosity range,</b> SUS [mm <sup>2</sup> /s]	98 ÷ 347 [20 ÷ 75]
<b>Filtration</b>	ISO code: 18/16/13 According to ISO 4406-1999

Oil flow in drain line

Pressure drop bar [PSI]	Viscosity mm <sup>2</sup> /s [SUS]	Oil flow in drain line lpm [GPM]
100 [1450]	20 [98]	2,5 [.660]
	35 [164]	1,8 [.476]
140 [2030]	20 [98]	3,5 [.925]
	35 [164]	2,8 [.740]

Pressure Losses

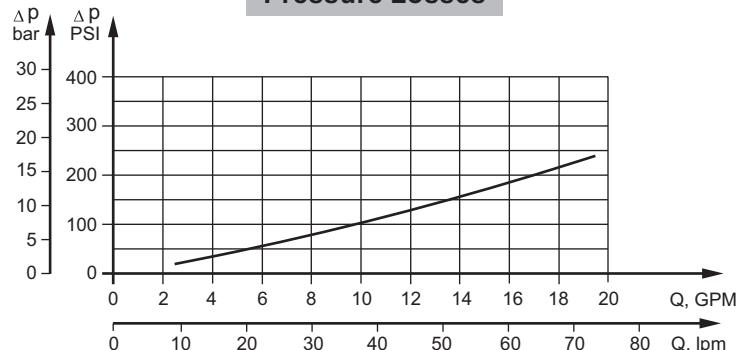

**SPECIFICATION DATA**

Type	MLHRW 50	MLHRW 80	MLHRW 100	MLHRW 125	MLHRW 160	MLHRW 200	MLHRW 250	MLHRW 315	MLHRW 400
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	3.14 [51,5]	4.90 [80,3]	6.09 [99,8]	7.67 [125,7]	9.74 [159,6]	12.19 [199,8]	15.26 [250,1]	19.26 [315,7]	24.4 [397]
<b>Max. Speed, [RPM]</b>	Cont. Int.*	775 1029	750 940	600 750	475 600	375 470	300 375	300 360	240 285
<b>Max. Torque, lb-in [daNm]</b>	Cont. Int.* Peak**	900 [10] 1150 [13] 1505 [17]	1770 [20] 1947 [22] 2390 [27]	2125 [24] 2480 [28] 2832 [32]	2655 [30] 3010 [34] 3275 [37]	3450 [39] 3805 [43] 4070 [46]	4000 [45] 4425 [50] 4960 [56]	4780 [54] 5400 [61] 6280 [71]	4870 [55] 5580 [63] 7350 [83]
<b>Max. Output, HP [kW]</b>	Cont. Int.*	9.5 [7] 11.9 [8,5]	17 [12,5] 20.1 [15]	17.4 [13] 20.1 [15]	16.8 [12,5] 19.5 [14,5]	15.4 [11,5] 18.8 [14]	14.8 [11] 17.4 [13]	13.4 [10] 16.1 [12]	12 [9] 14.8 [11]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont. Int.* Peak**	2030 [140] 2540 [175] 3260 [225]	2540 [175] 2900 [200] 3260 [225]	1960 [135] 2320 [160] 3045 [210]	1600 [110] 2030 [140] 2540 [175]				
<b>Max. Oil Flow, GPM [lpm]</b>	Cont. Int.*	11 [40] 13 [50]	15.9 [60] 19.8 [75]	15.9 [60] 19.8 [75]	15.9 [60] 19.8 [75]	15.9 [60] 19.8 [75]	19.8 [75] 23.8 [90]	19.8 [75] 23.8 [90]	19.8 [75] 23.8 [90]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200] 3260 [225]							
<b>Max. Return Pres- sure with Drain Line, PSI [bar]</b>	Cont. Int.* Peak**	2540 [175] 2900 [200] 3260 [225]							
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	145 [10]	130 [9]	102 [7]	73 [5]	73 [5]	73 [5]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont.	710 [8]	1330 [15]	1770 [20]	2215 [25]	2832 [32]	3630 [41]	4425 [50]	4425 [50]
	At max.press. drop Int.*	885 [10]	1505 [17]	2035 [23]	2480 [28]	3275 [37]	4070 [46]	4870 [55]	5840 [66]
<b>Min. Speed***, [RPM]</b>		10	10	10	9	7	5	6	5
<b>Weight, lb [kg]</b>		21.2 [9,6]	21.4 [9,7]	21.7 [9,8]	22.1 [10,0]	22.7 [10,3]	23.8 [10,8]	24.9 [11,3]	27.63 [11,8]
									[12,5]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

**FUNCTION DIAGRAMS**

**MLHRW 50**

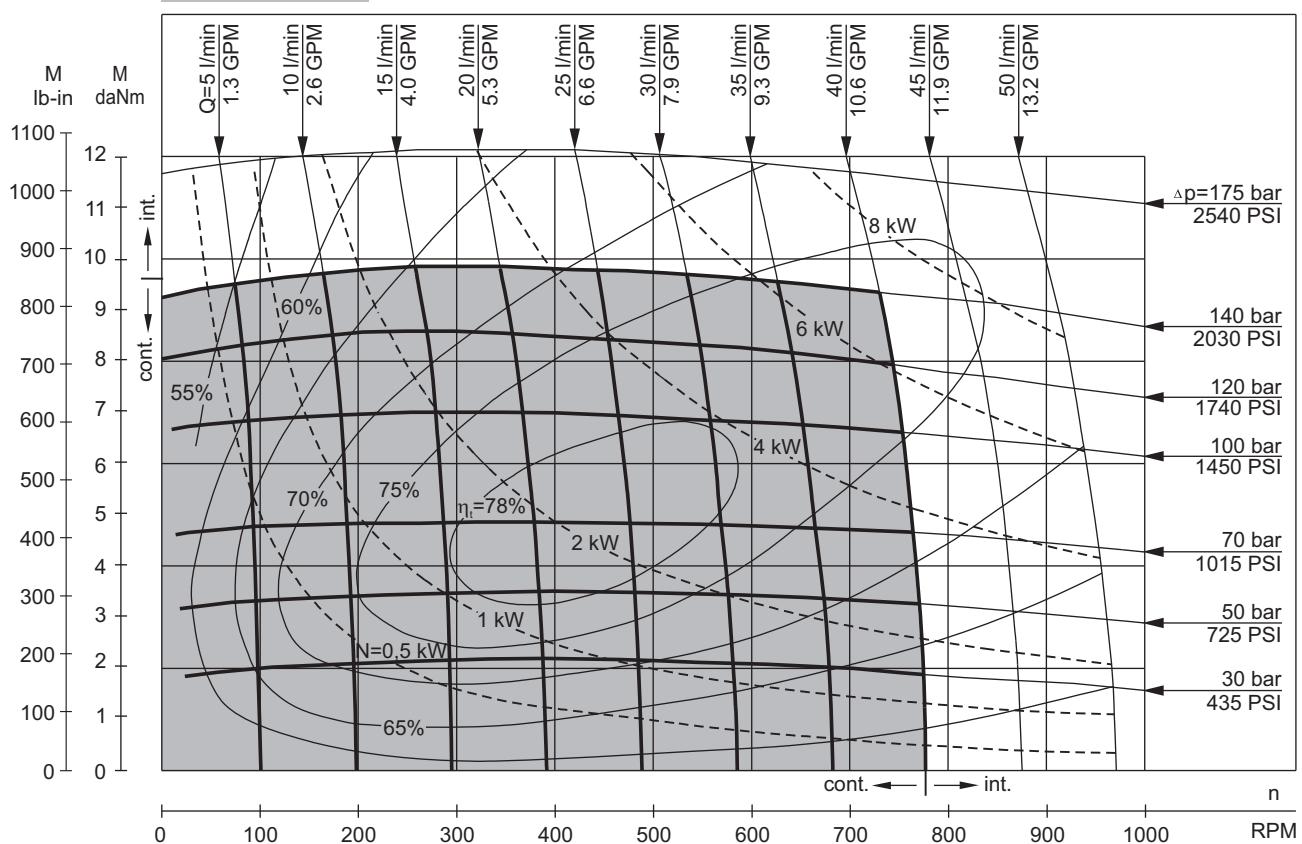


**MLHRW 80**

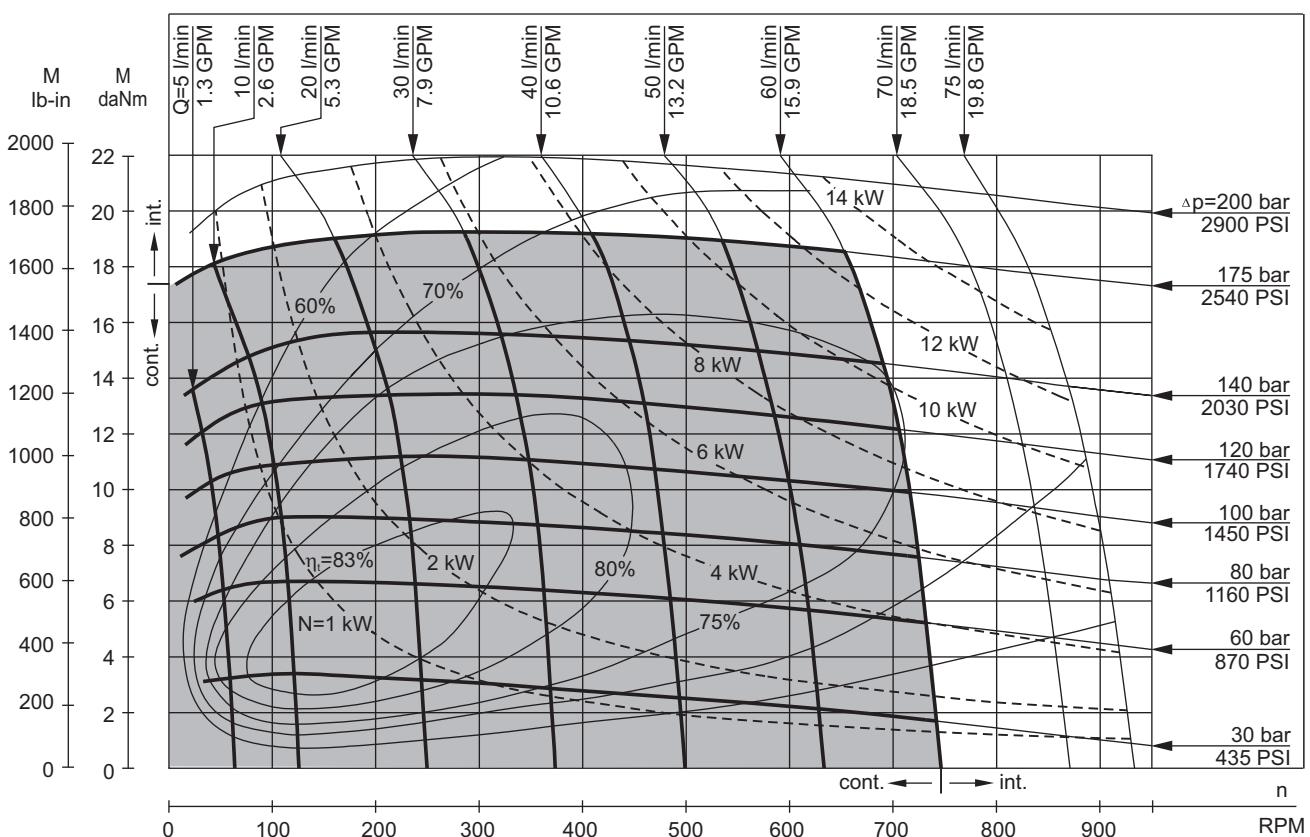


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI / 145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

**FUNCTION DIAGRAMS**

**MLHRW 100**

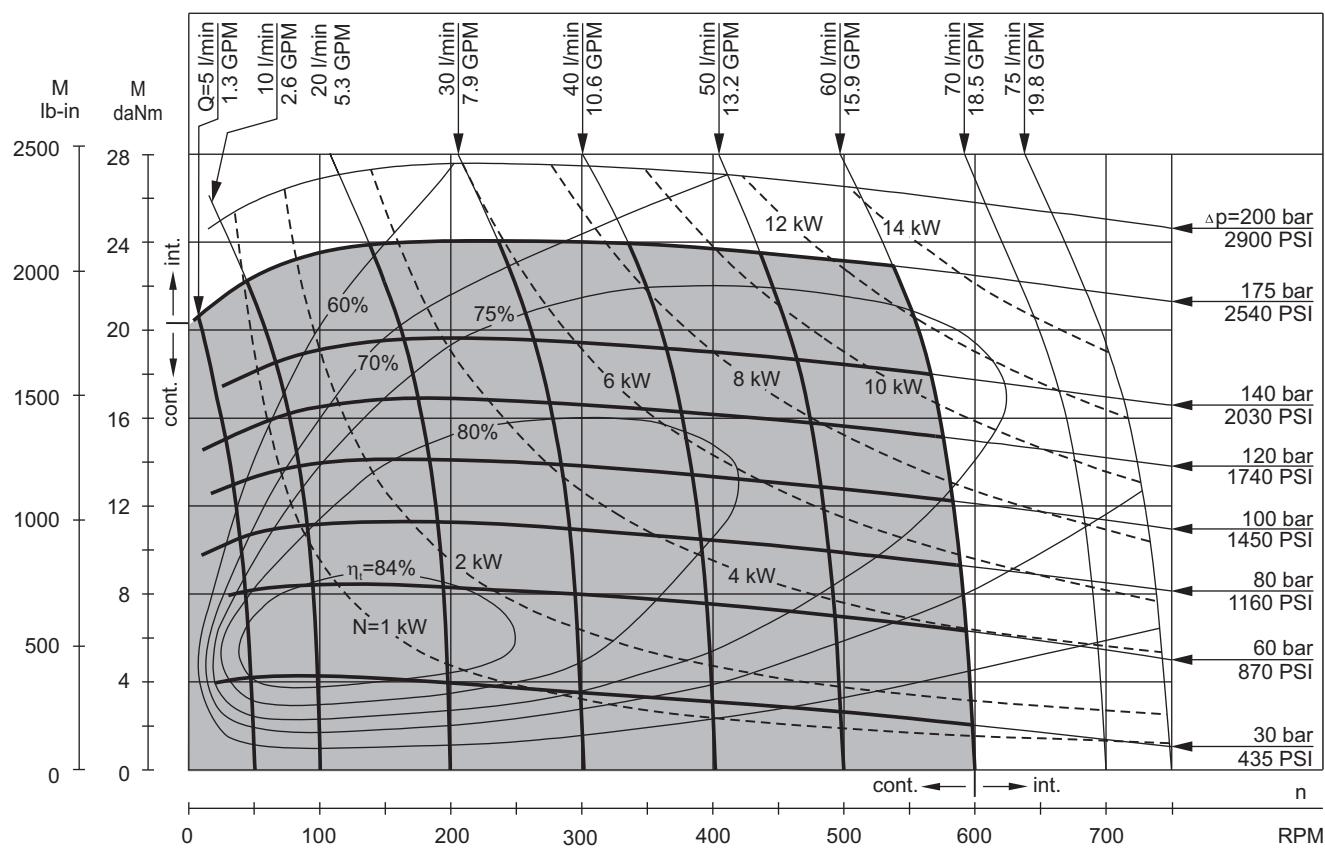


**MLHRW 125**

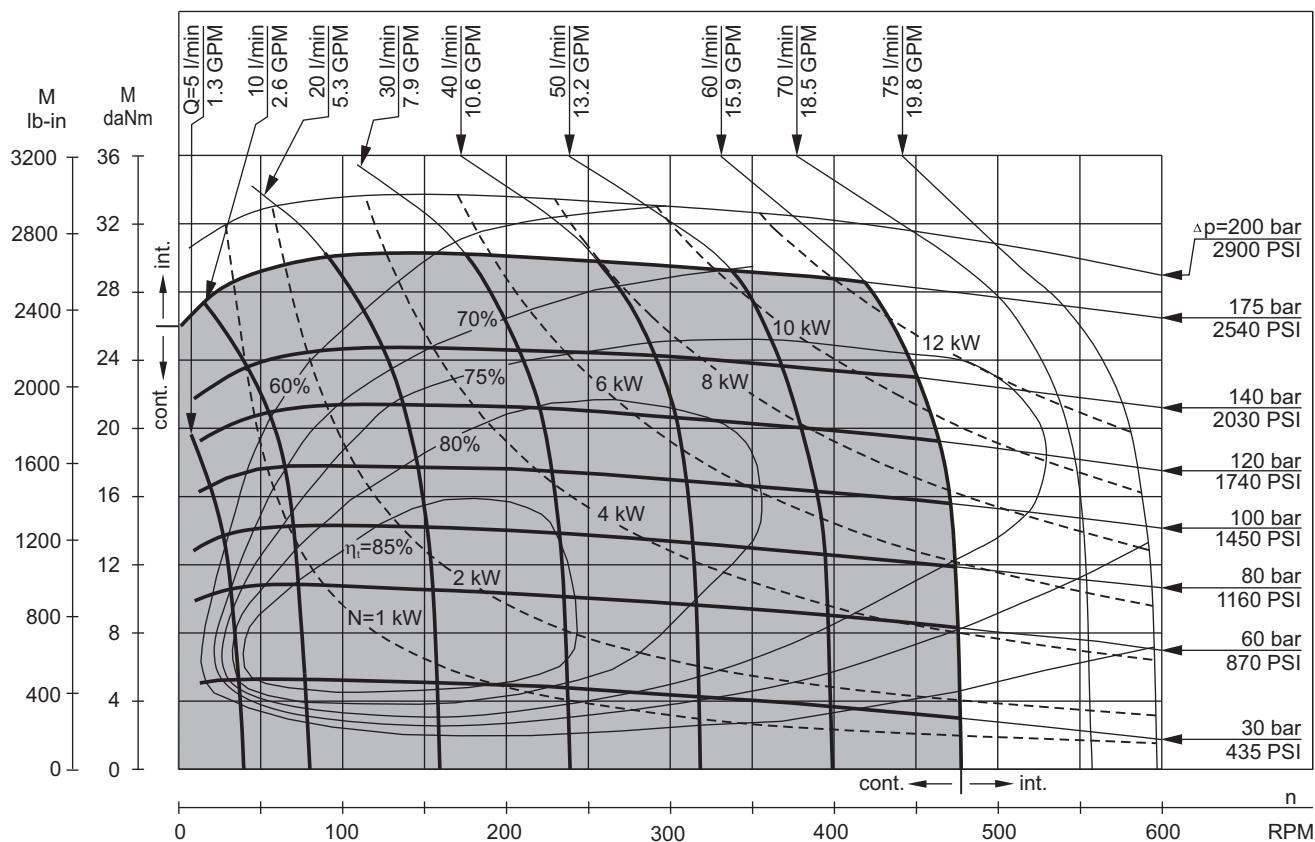


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

**FUNCTION DIAGRAMS**

**MLHRW 160**

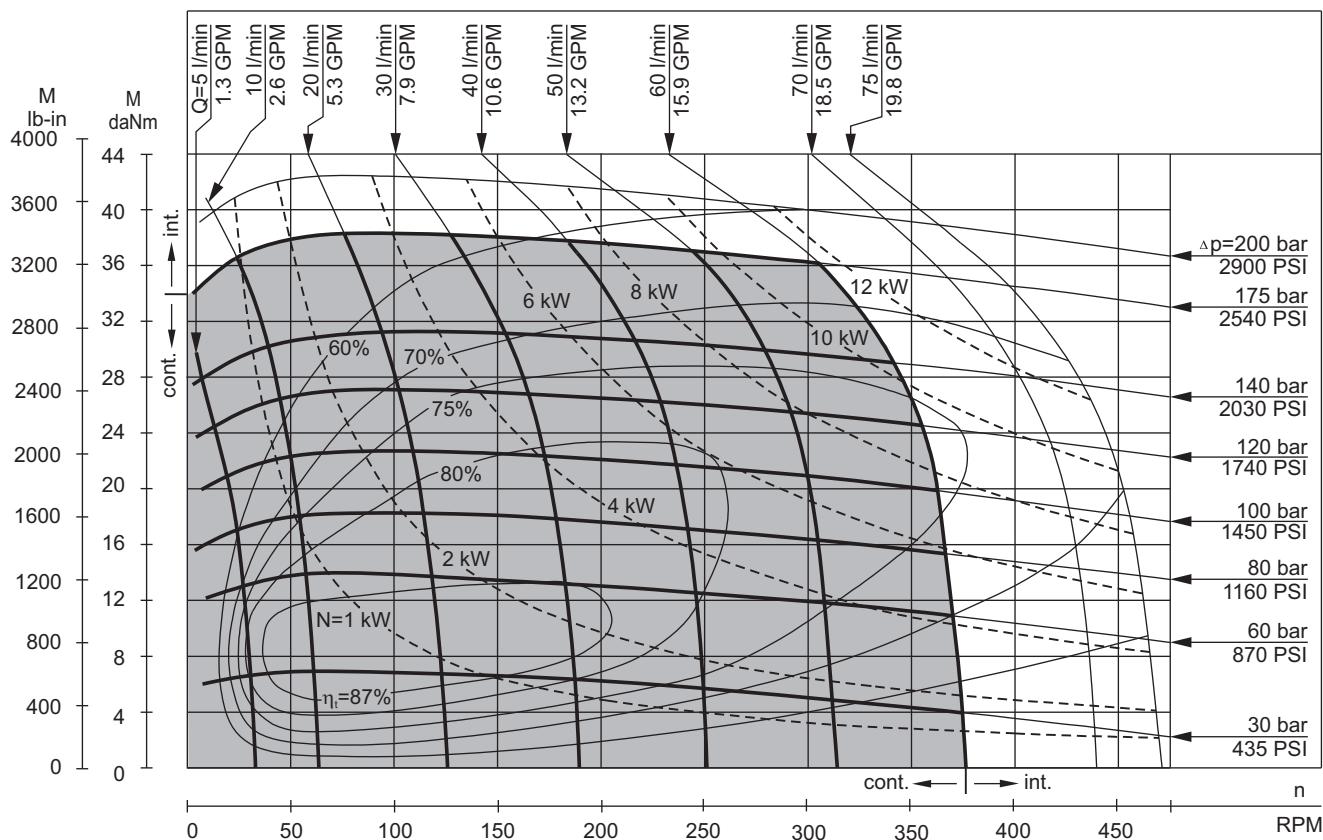


**MLHRW 200**

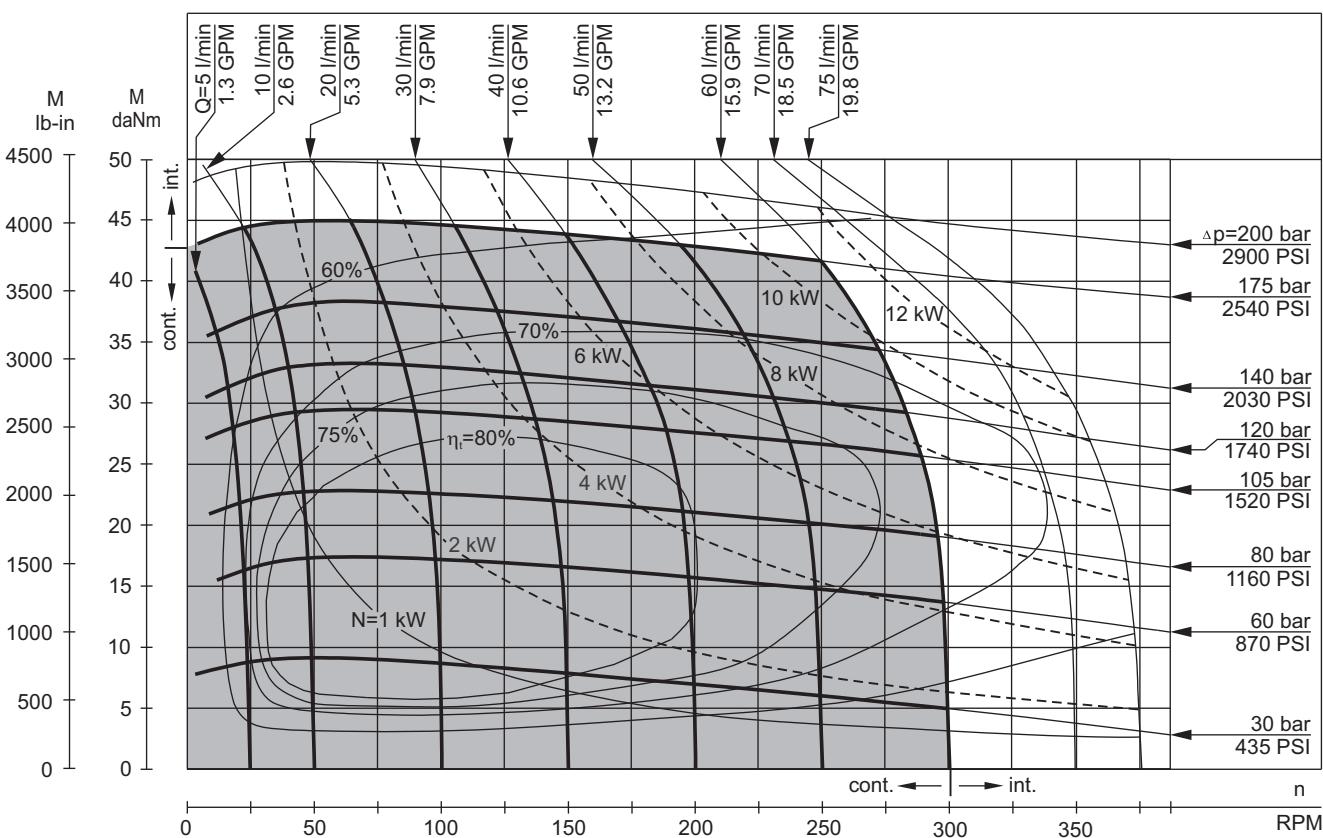


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

**FUNCTION DIAGRAMS**

**MLHRW 250**

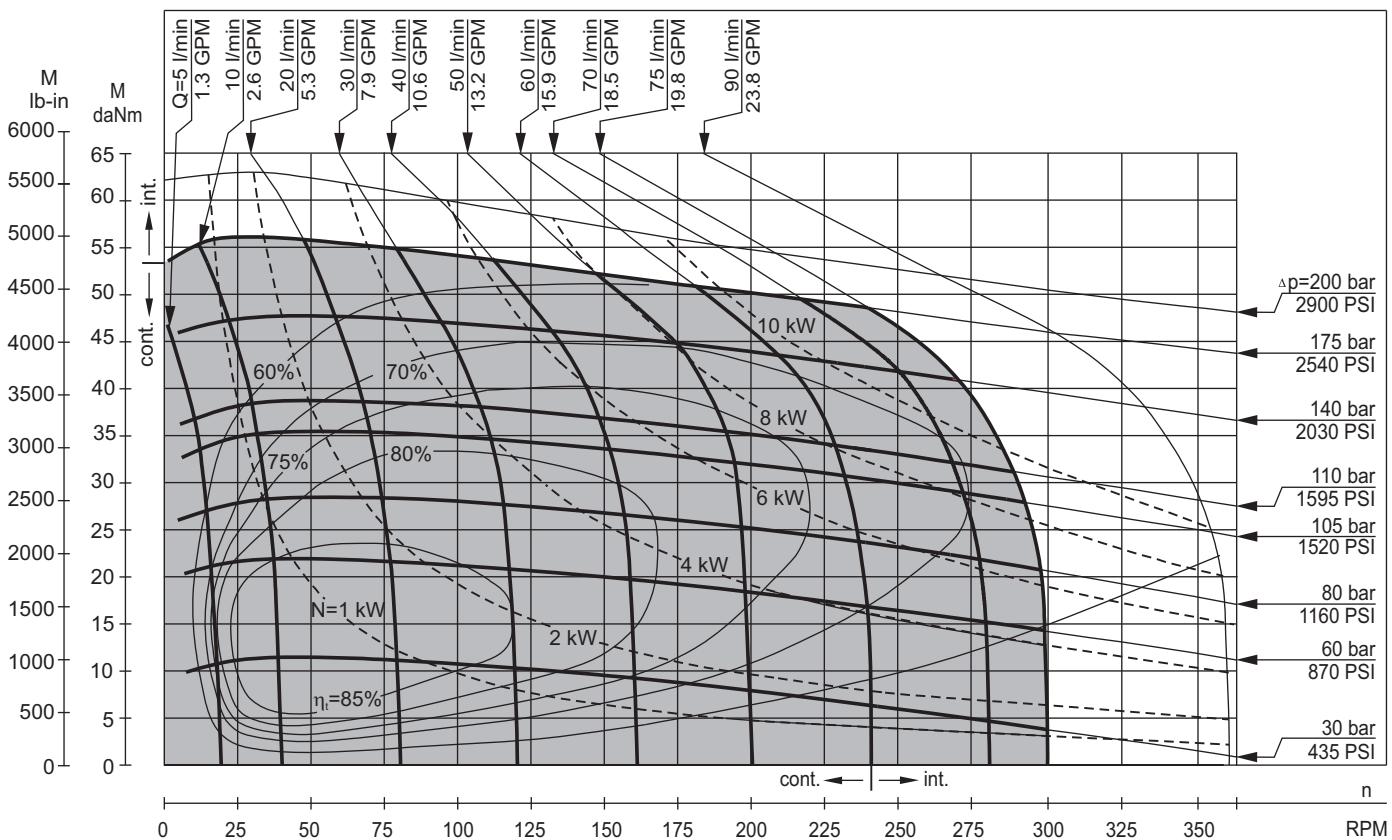


**MLHRW 315**

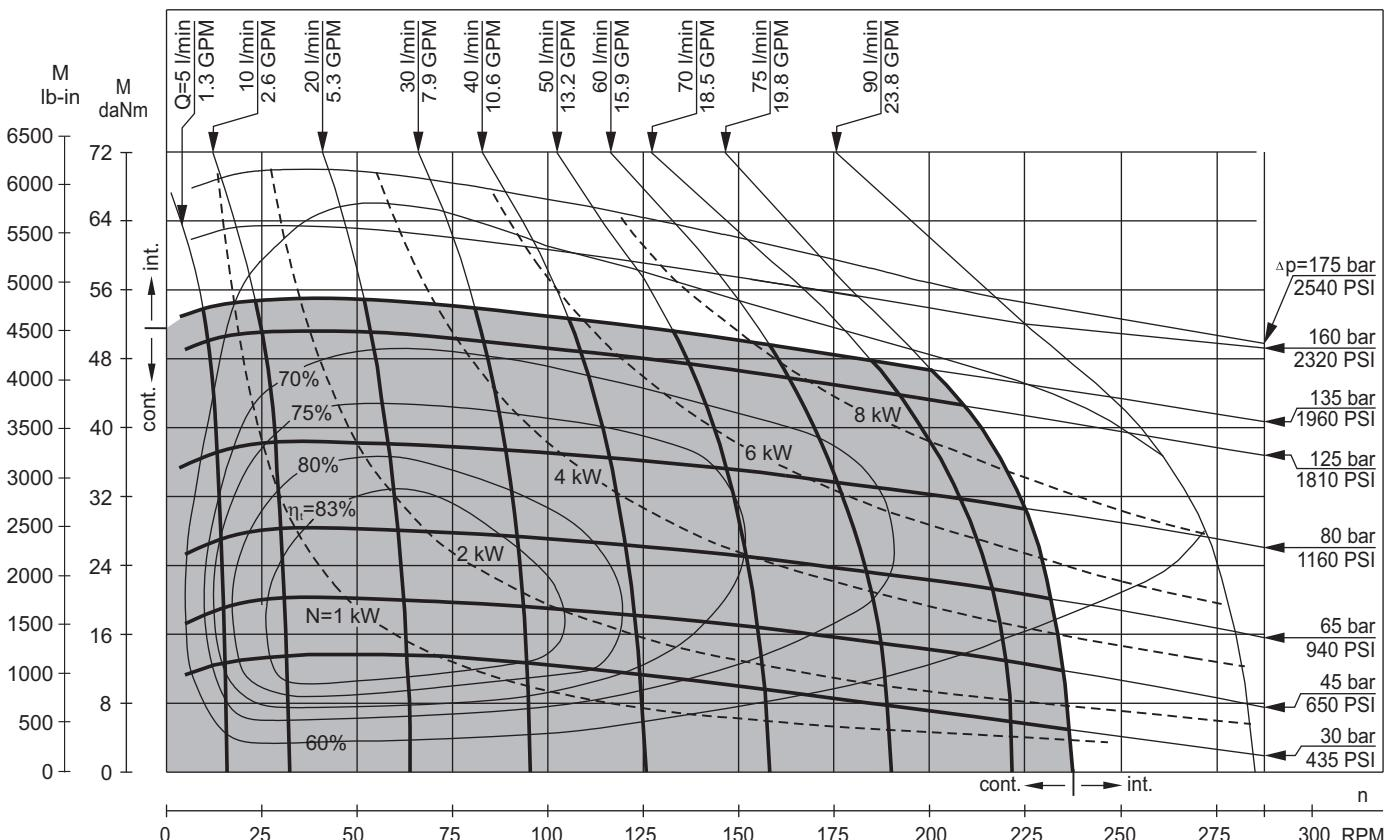

The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

**MLHRW 400**

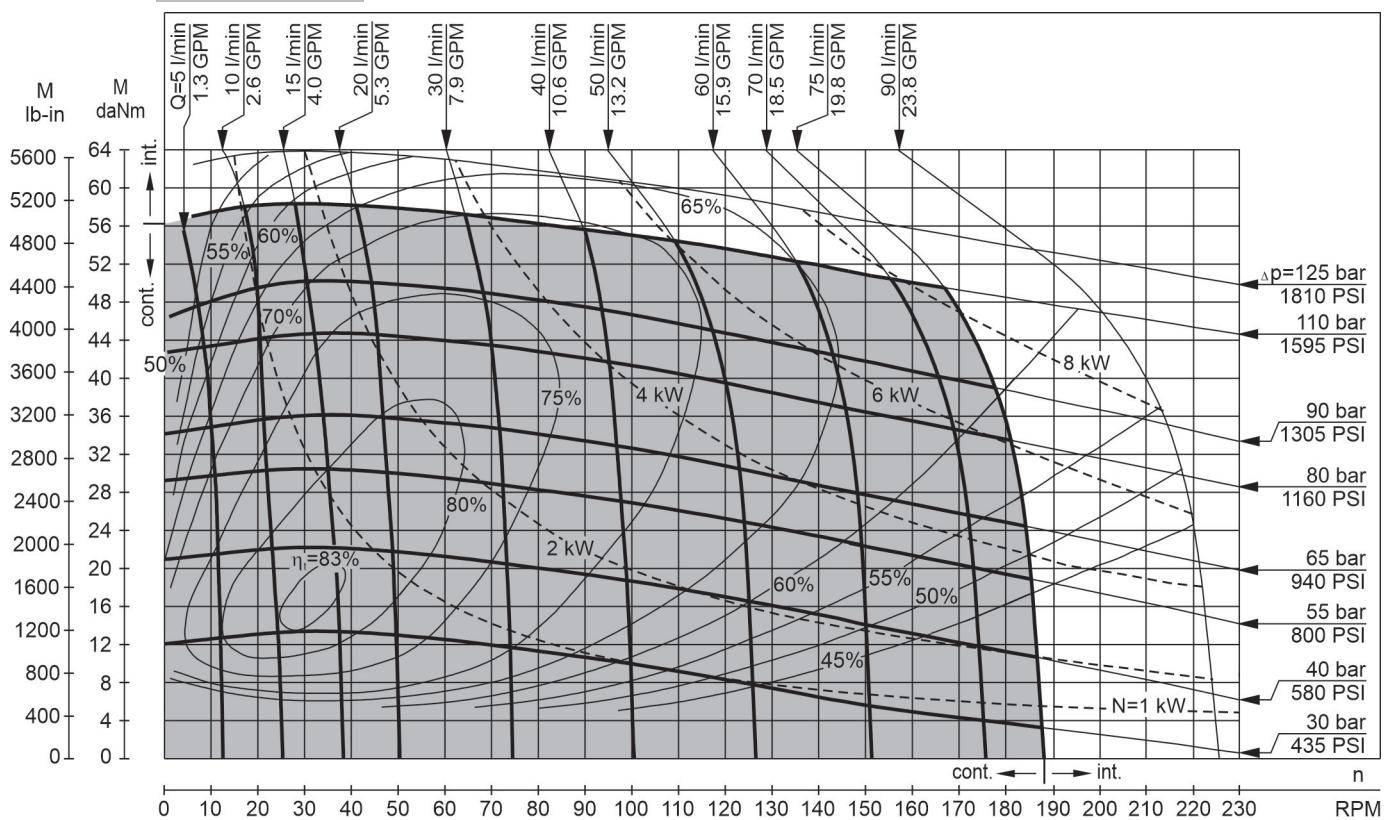


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

**MAX. PERMISSIBLE SHAFT SEAL PRESSURE**


**MLHRW...; MLHRW...UK motors with drain connection:**

The shaft seal pressure equals the pressure in the drain line.




**MLHRW...1 motors without drain connection:**

The shaft seal pressure never exceeds the pressure in the return line.

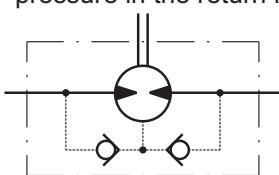


**MLHRW...U motors with high pressure seal and drain connection:**

The shaft seal pressure equals the pressure in the drain line.



**Max. return pressure without drain line or max. pressure in the drain line**

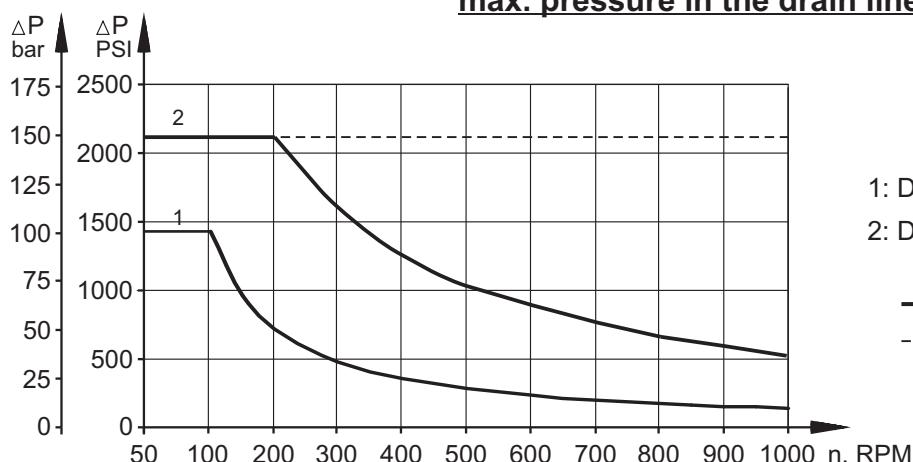


1: Drawing for Standard Shaft Seal



2: Drawing for High Pressure Seal ("U" Seal)

— continuous operations  
- - - intermittent operations

**DIMENSIONS and MOUNTING DATA - MLHRW (WHEEL MOTOR)**

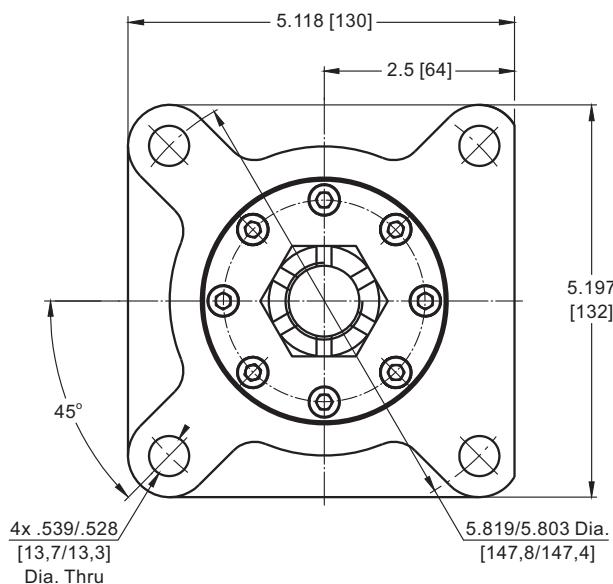

Type	L <sub>max</sub> , in [mm]	L <sub>1</sub> , in [mm]
MLHRW 50	4.25 [108,0]	.35 [ 9,0]
MLHRW 80	4.45 [113,0]	.55 [14,0]
MLHRW 100	4.59 [116,5]	.69 [17,4]
MLHRW 125	4.74 [120,5]	.86 [21,8]
MLHRW 160	4.98 [126,5]	1.09 [27,8]
MLHRW 200	5.26 [133,5]	1.37 [34,8]
MLHRW 250	5.61 [142,5]	1.71 [43,5]
MLHRW 315	6.04 [153,5]	2.16 [54,8]
MLHRW 400	6.63 [168,5]	2.16 [54,8]

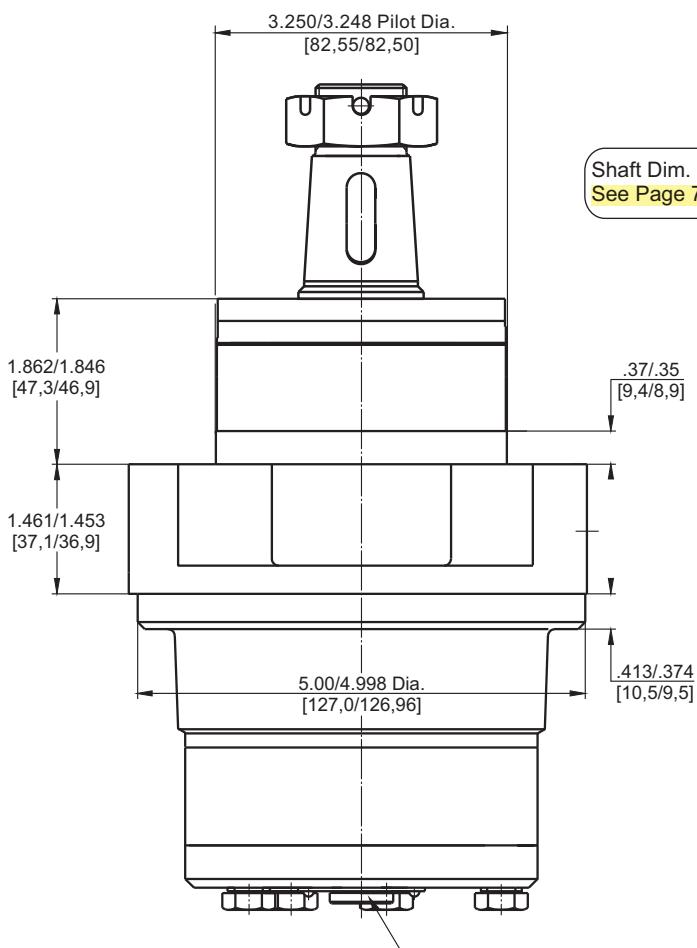

in [mm]

**Standard Rotation**

Viewed from Shaft End

Port A Pressurized - **CW**


Port B Pressurized - **CCW**

**Reverse Rotation**

Viewed from Shaft End

Port A Pressurized - **CCW**


Port B Pressurized - **CW**

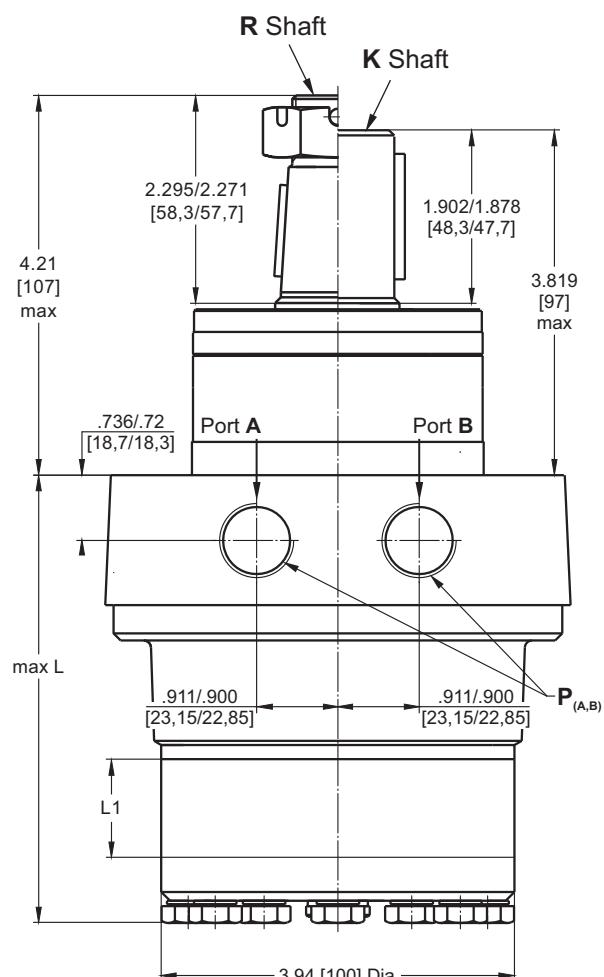

	Versions	
	2	4
P <sub>(A,B)</sub>	2xG $\frac{1}{2}$	2x $\frac{7}{8}$ - 14 UNF
T	G $\frac{1}{4}$	$\frac{7}{16}$ - 20 UNF


## SHAFT EXTENSIONS

**K** - 1 $\frac{1}{4}$ " [31,75] straight, Parallel key  $\frac{5}{16}" \times \frac{5}{16}" \times 1\frac{1}{4}"$  BS 46  
Max. Torque 6815 lb-in [77 daNm]

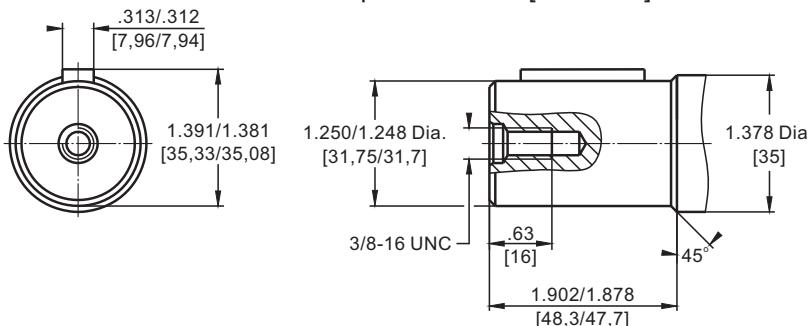


Requirement max. Torque must be not exceeded.

**R** - 1 $\frac{1}{4}$ " [31,75] straight, SAE J501 Tapered, Parallel key  $\frac{5}{16}" \times \frac{5}{16}" \times 1\frac{1}{4}"$  BS 46  
Max. Torque 6815 lb-in [77 daNm]

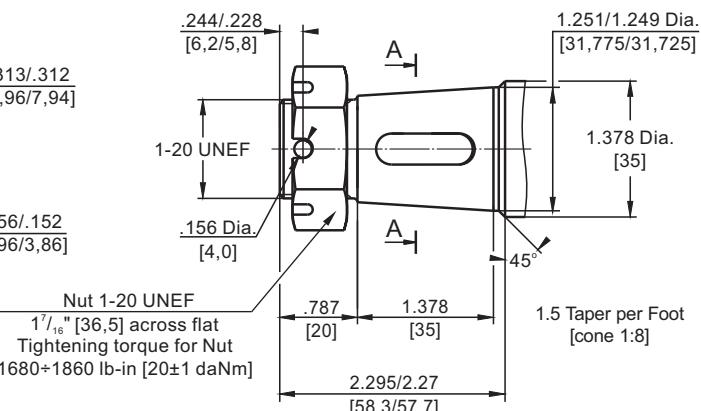

### PERMISSIBLE SHAFT LOADS

The curve applies to a B10 bearing life of 2000 hours.

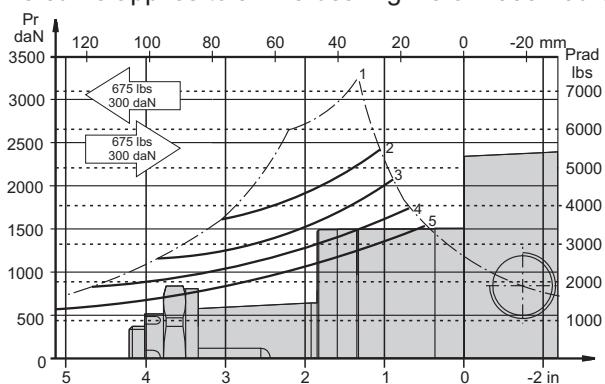

1. Permissible radial shaft load
2. Drawing by  $n = 50$  rpm
3. Drawing by  $n = 100$  rpm
4. Drawing by  $n = 200$  rpm
5. Drawing by  $n = 400$  rpm



### ORDER CODE

<b>M L H R W</b>	1	2	3	4	5	6	7
------------------	---	---	---	---	---	---	---

#### Pos.1 - Displacement code

<b>50</b>	- 3.14 in <sup>3</sup> /rev [ 51,5 cm <sup>3</sup> /rev]
<b>80</b>	- 4.90 in <sup>3</sup> /rev [ 80,3 cm <sup>3</sup> /rev]
<b>100</b>	- 6.09 in <sup>3</sup> /rev [ 99,8 cm <sup>3</sup> /rev]
<b>125</b>	- 7.67 in <sup>3</sup> /rev [125,7 cm <sup>3</sup> /rev]
<b>160</b>	- 9.74 in <sup>3</sup> /rev [159,6 cm <sup>3</sup> /rev]
<b>200</b>	- 12.19 in <sup>3</sup> /rev [199,8 cm <sup>3</sup> /rev]
<b>250</b>	- 15.26 in <sup>3</sup> /rev [250,1 cm <sup>3</sup> /rev]
<b>315</b>	- 19.26 in <sup>3</sup> /rev [315,7 cm <sup>3</sup> /rev]
<b>400</b>	- 24.40 in <sup>3</sup> /rev [397,0 cm <sup>3</sup> /rev]

#### Pos.2 - Shaft Extensions\*

<b>K</b>	- 1 $\frac{1}{4}$ " [31,75] straight, Parallel key
<b>R</b>	- 1 $\frac{1}{4}$ " [31,75] SAE J501 Tapered

#### Pos.3 - Port Size/Type [standard manifold to each]

<b>2</b>	- side ports, 2xG1/2, G1/4, BSP thread, ISO 228
<b>4</b>	- side ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF

#### Pos.4 - Shaft Seal Version

omit - Standard shaft seal

**U** - High pressure shaft seal without check valves

**UK** - High pressure shaft seal with check valves

#### Pos.5 - Drain Port

omit - with drain port

**1** - without drain port

#### Pos.6 - Special Features [see page 110]

#### Pos.7 - Design Series

omit - Factory specified

**NOTES:** \* The permissible output torque for shafts must not be exceeded!


The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS MLHH



## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Mining machinery etc.



## CONTENTS

Specification data .....	79
Function diagrams .....	80÷82
Permissible shaft loads .....	82
Dimensions and mounting .....	83
Permissible shaft seal pressure ....	84
Shaft extensions .....	85
Order code .....	85

## OPTIONS

- » Model - Spool valve, roll-gerotor
- » Flange mount
- » Shafts - straight, splined and tapered
- » SAE, Metric and BSPP ports
- » Speed sensoring
- » Other special features


## GENERAL

<b>Max. Displacement,</b> in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	30.7 [502,4]
<b>Max. Speed,</b> [RPM]	445
<b>Max. Torque,</b> lb-in [daNm]	cont.: 7434 [84] int.: 9204 [104]
<b>Max. Output,</b> HP [kW]	24.8 [18,5]
<b>Max. Pressure Drop,</b> PSI [bar]	cont.: 2540 [175] int.: 2900 [200]
<b>Max. Oil Flow,</b> GPM [lpm]	23.9 [90]
<b>Min. Speed,</b> [RPM]	5
<b>Pressure fluid</b>	Mineral based - HLP(DIN 51524) or HM(ISO 6743/4)
<b>Temperature range,</b> °F [°C]	-40 ÷ 284 [-40 ÷ 140]
<b>Optimal Viscosity range,</b> SUS [mm <sup>2</sup> /s]	98 ÷ 347 [20 ÷ 75]
<b>Filtration</b>	ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure Losses

Pressure drop PSI [bar]	Viscosity SUS [mm <sup>2</sup> /s]	Oil flow in drain line GPM [lpm]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]

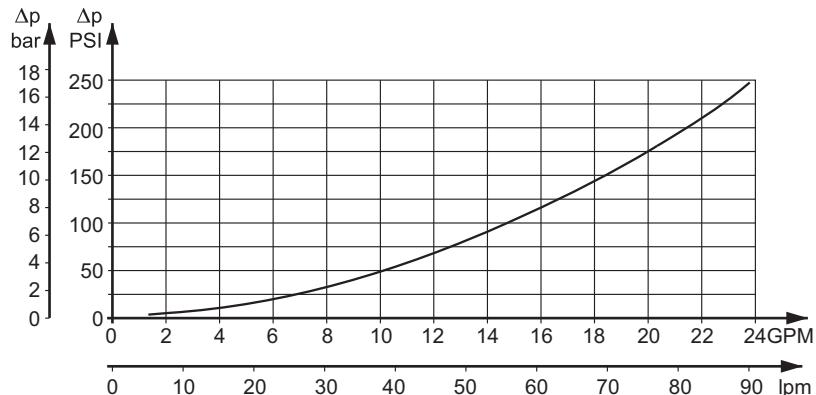

## SPECIFICATION DATA

Type	MLHH 200	MLHH 250	MLHH 315	MLHH 400	MLHH 500
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	12.3 [201,3]	15.4 [252]	19.2 [314,9]	24.2 [396,8]	30.7 [502,4]
<b>Max. Speed, [RPM]</b>	Cont.	370	295	235	185
	Int.*	445	350	285	225
<b>Max. Torque, lb-in [daNm]</b>	Cont.	4510 [51]	5398 [61]	6548 [74]	7434 [84]
	Int.*	5130 [58]	6195 [70]	7257 [82]	8673 [98]
	Peak**	5064 [64]	6992 [79]	8673 [98]	9647 [109]
<b>Max. Output, HP [kW]</b>	Cont.	21 [16]	21 [16]	18.7 [14]	16.7 [12,5]
	Int.*	24.8 [18,5]	24.8 [18,5]	20.7 [15,5]	20.1 [15]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont.	2540 [175]	2540 [175]	2540 [175]	2240 [155]
	Int.*	2900 [200]	2900 [200]	2900 [200]	2750 [190]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3045 [210]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont.	19.8 [75]	19.8 [75]	19.8 [75]	19.8 [75]
	Int.*	23.9 [90]	23.9 [90]	23.9 [90]	23.9 [90]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont.	2900 [200]	2900 [200]	2900 [200]	2900 [200]
	Int.*	3260 [225]	3260 [225]	3260 [225]	3260 [225]
	Peak**	3626 [250]	3626 [250]	3626 [250]	3626 [250]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>					
	72 [5]	72 [5]	72 [5]	72 [5]	72 [5]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max.press. drop Cont.	3450 [39]	4600 [52]	5840 [66]	6370 [72]
	At max.press. drop Int.*	3980 [45]	5221 [59]	6460 [73]	7788 [88]
<b>Min. Speed***, [RPM]</b>		10	10	8	5
<b>Weight, lb [kg]</b>	23.2 [10,5]	24.3 [11]	25.4 [11,5]	27.1 [12,3]	28.7 [13]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds lower than given, consult factory or your regional manager.


- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil, HLP(DIN51524) or HM(ISO6743/4). If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
- 5) Recommended maximum system operating temperature is 180°F [82°C].
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## FUNCTION DIAGRAMS

**MLHH 200**

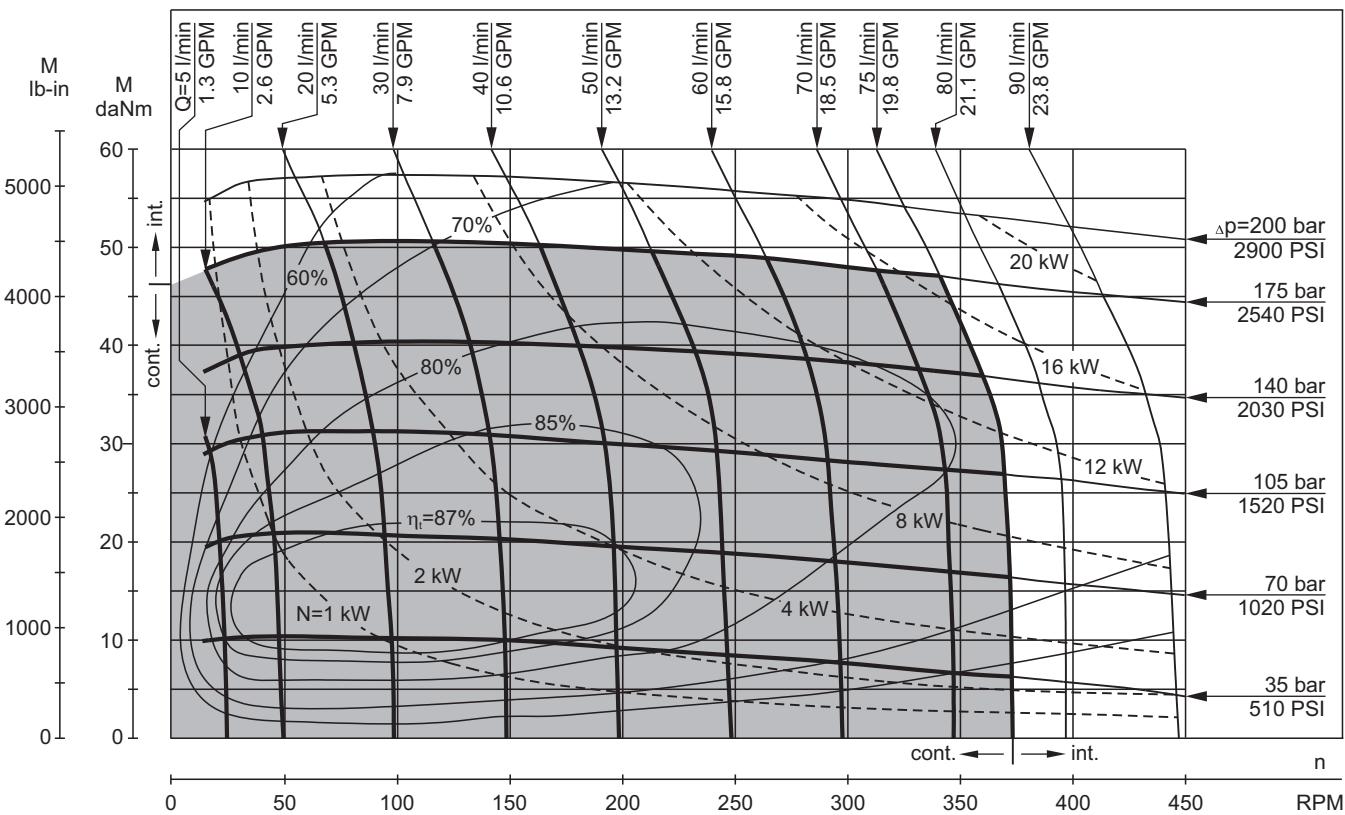


**MLHH 250**

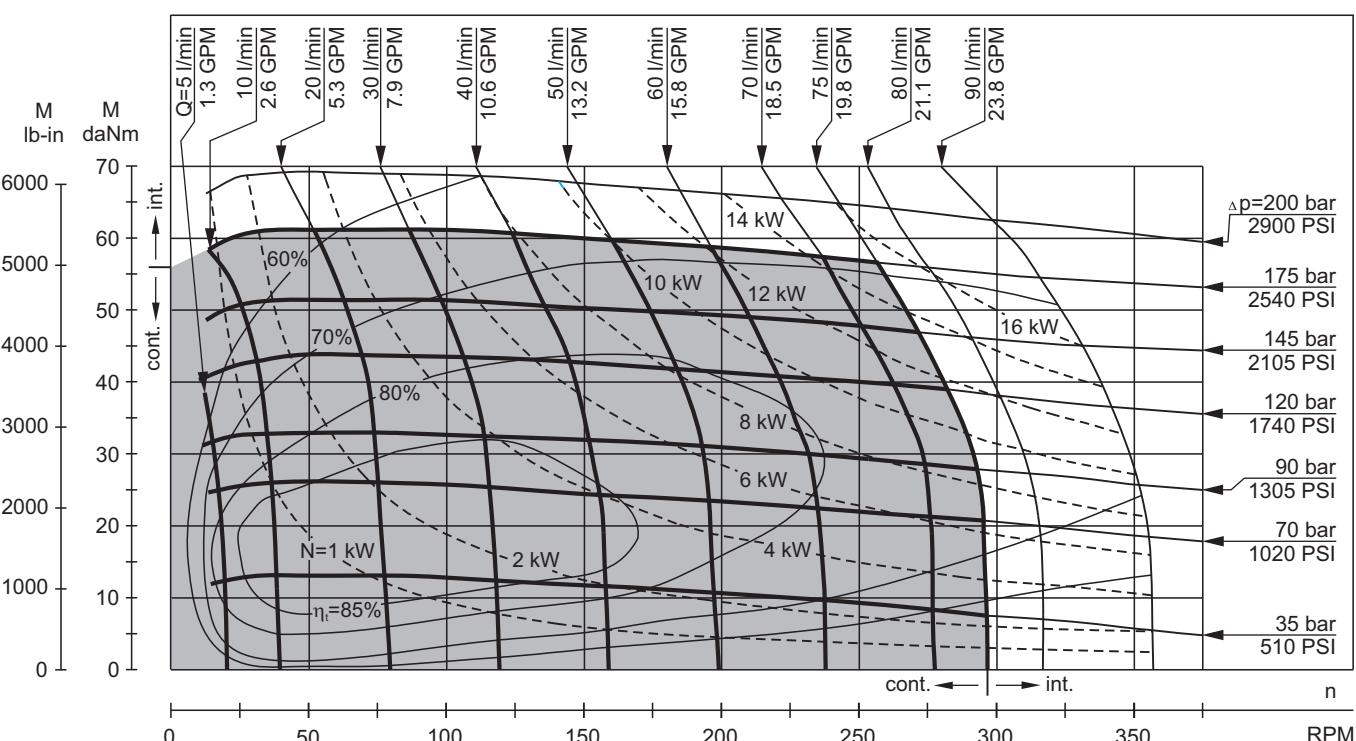


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

**MLHH 315**

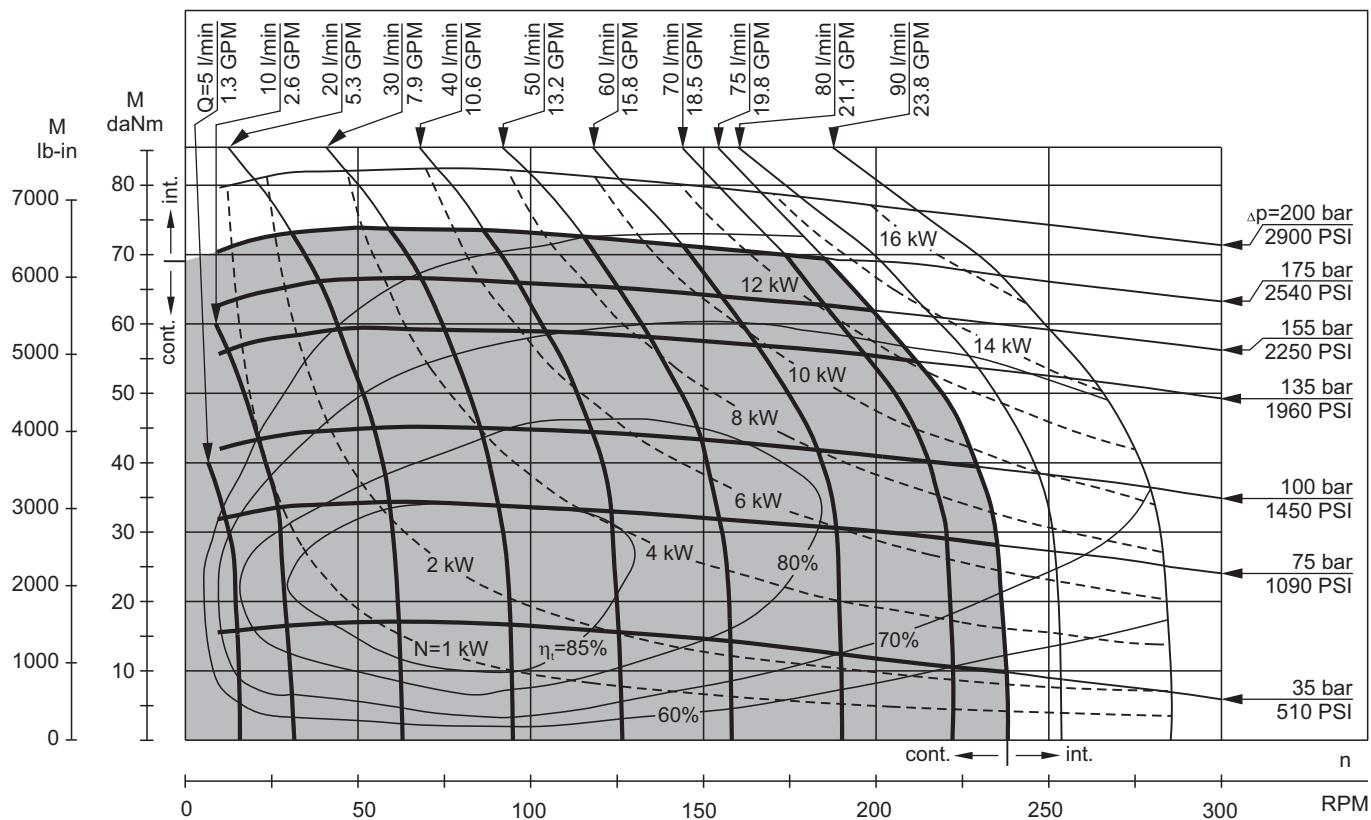


**MLHH 400**

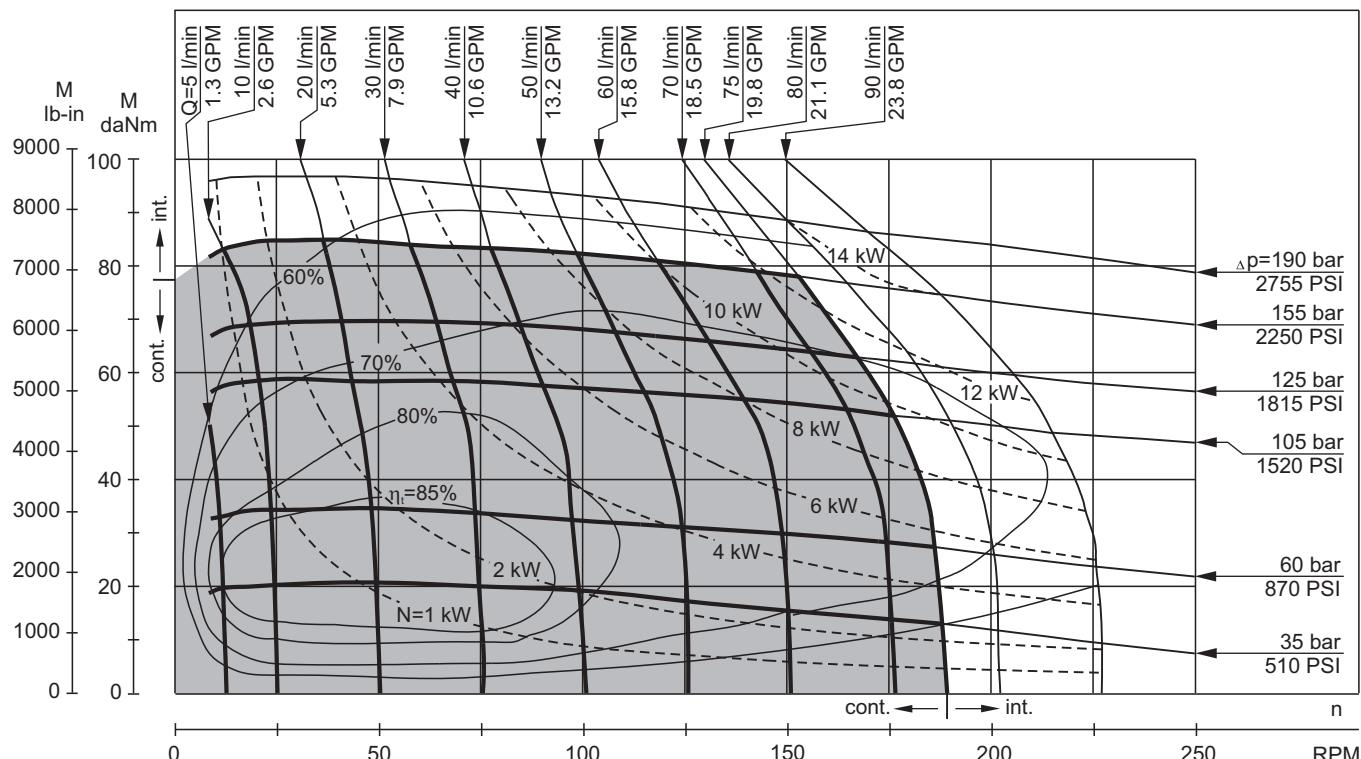

The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI +145 PSI [5+10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

### MLHH 500

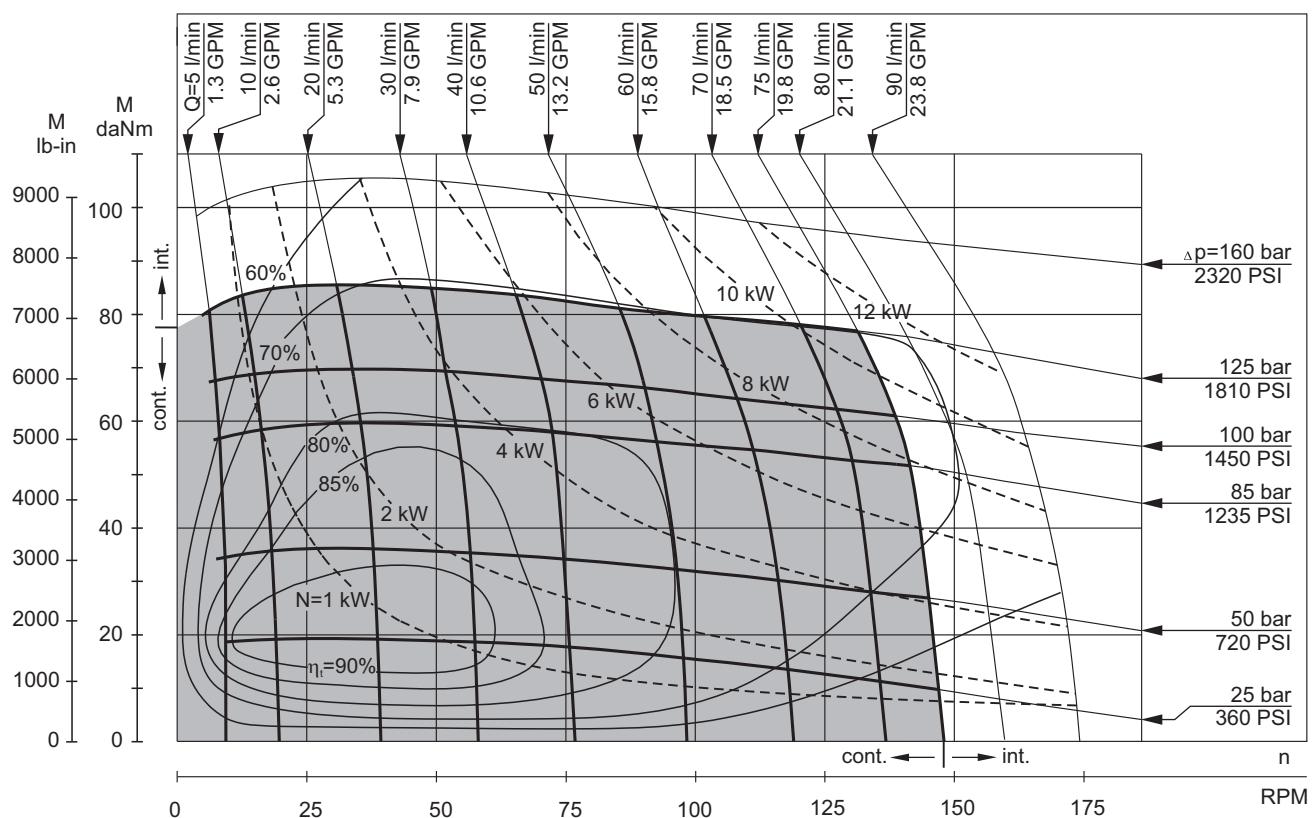

The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI+145 PSI [5+10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

### PERMISSIBLE SHAFT LOADS



The permissible radial shaft load  $P_{rad}$  depends on the speed (RPM) and distance (L) from the point of load to the mounting flange.

$$\text{Radial Shaft Load } P_{rad} = \frac{1100}{n} \times \frac{25000}{103,5+L}, \text{ daN*}$$

[\*L in mm; L≤60 mm; n≥200 RPM]

$$\text{Radial Shaft Load } P_{rad} = \frac{1100}{\text{RPM}} \times \frac{2215}{4.075+L}, \text{ lbs**}$$

[\*\*L in inch; L≤2.36 in; n≥200 RPM]

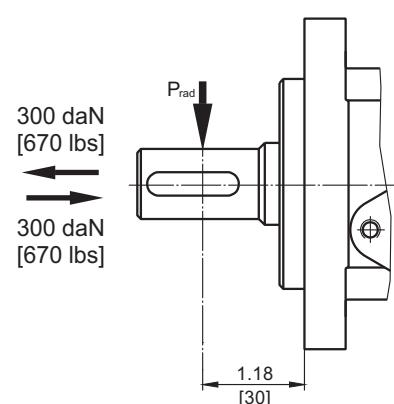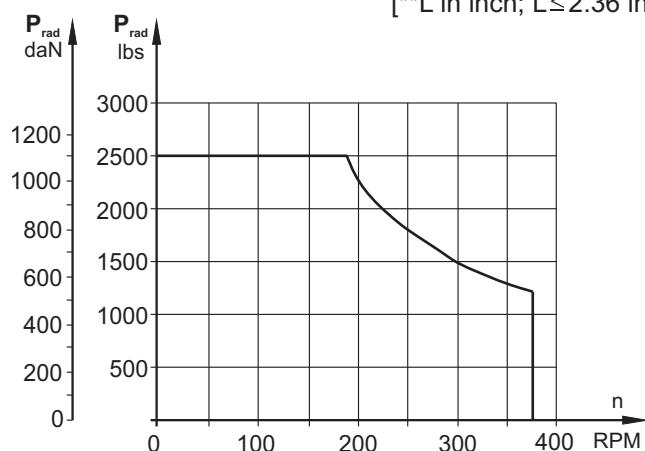

## DIMENSIONS and MOUNTING DATA

Magneto mount (4 holes)

Type	L, in [mm]	L <sub>1</sub> , in [mm]
MLHH 200	6.65 [169]	1.09 [27,8]
MLHH 250	6.93 [176]	1.37 [34,8]
MLHH 315	7.24 [184]	1.71 [43,5]
MLHH 400	7.72 [196]	2.16 [54,8]
MLHH 500	8.31 [211]	2.73 [69,4]

**Standard Rotation**  
Viewed from Shaft End  
Port A Pressurized - CW  
Port B Pressurized - CCW




**Reverse Rotation**  
Viewed from Shaft End  
Port A Pressurized - CCW  
Port B Pressurized - CW

	Versions			
	[2]	[3]	[4]	[5]
C	4xM8	4xM8	4x $\frac{5}{16}$ -18 UNC	4x $\frac{5}{16}$ -18 UNC
P <sub>(A,B)</sub>	2xG $\frac{1}{2}$	2xM22x1,5	2x $\frac{7}{8}$ -14 UNF	2x $\frac{1}{2}$ -14 NPTF
T	G $\frac{1}{4}$	M14x1,5	$\frac{7}{16}$ -20 UNF	$\frac{7}{16}$ -20 UNF



in [mm]

Shaft Dim.  
See Page 85

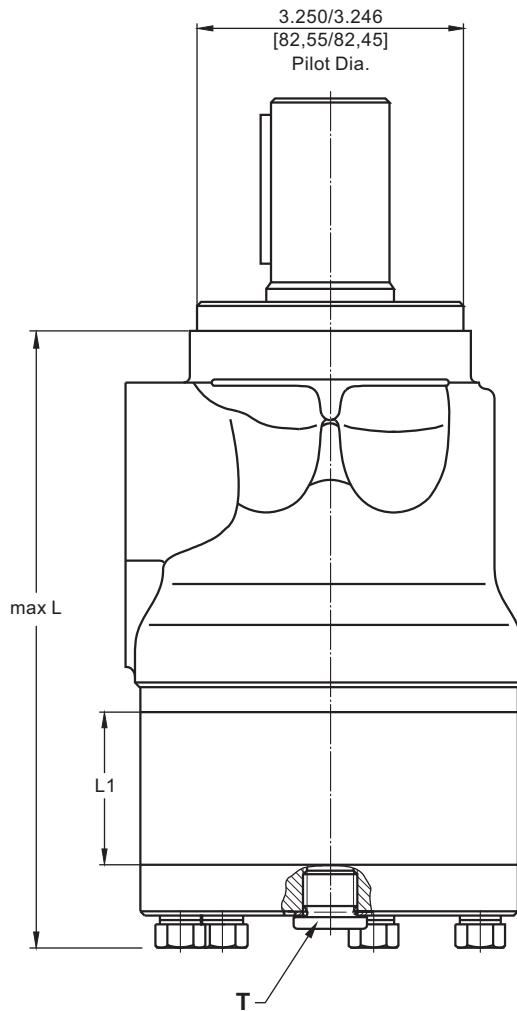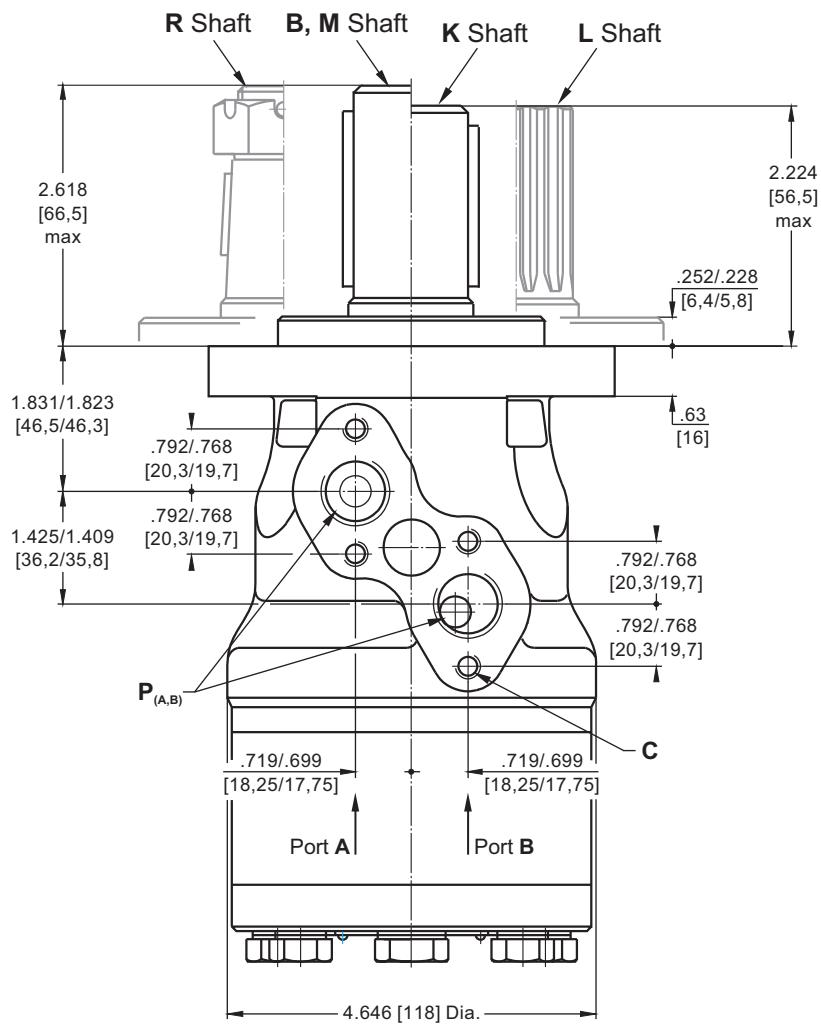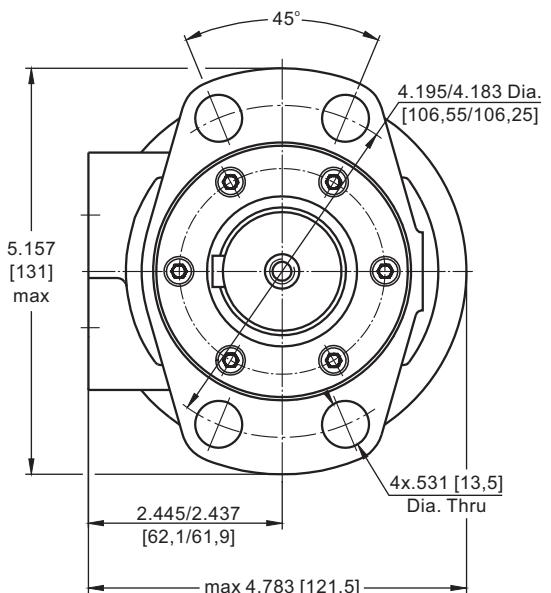


## MAX. PERMISSIBLE SHAFT SEAL PRESSURE

### **MLHH...U1 motors with high pressure seal and without drain connection:**


The shaft seal pressure equals the average of input pressure and return pressure.

$$P_{\text{seal}} = \frac{P_{\text{input}} + P_{\text{return}}}{2}$$




### **MLHH...U motors with high pressure seal and drain connection:**

The shaft seal pressure equals the pressure in the drain line.




### **MLHH...1 motors with standard shaft seal and without drain connection:**

The shaft seal pressure never exceeds the pressure in the return line.




### **MLHH... motors with standard shaft seal and with drain connection:**

The shaft seal pressure equals the pressure in the drain line.



### **Max. return pressure without drain line or max. pressure in the drain line**

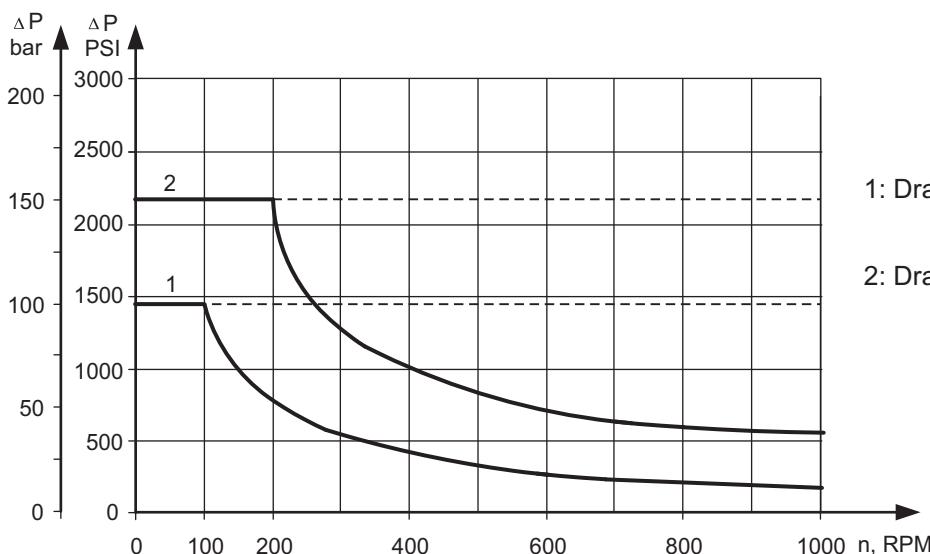

1: Drawing for Standard Shaft Seal



2: Drawing for High Pressure Seal ("U" Seal)

— continuous operations  
- - - - - intermittent operations

## SHAFT EXTENSIONS



**K**

1 1/4" [31,75] straight, Parallel key 5/16"x 5/16"x 1 1/4" BS 46  
Max. Torque 6815 lb-in [77 daNm]

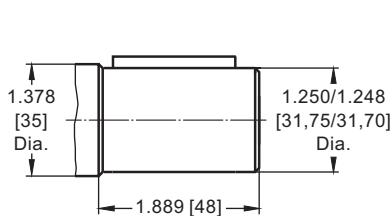



**B**

ø35 straight, Parallel key A10x8x45 DIN 6885  
Max. Torque 8400 lb-in [95 daNm]

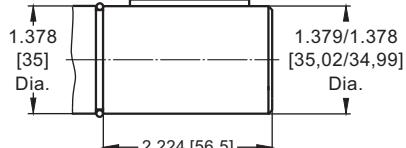


**M**

ø32 straight, Parallel key A10x8x45 DIN 6885  
Max. Torque 6815 lb-in [77 daNm]

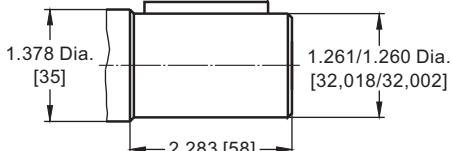


**L**

14T Splined, 1 1/4" [31,75], ANS B 92.1-1976  
Max. Torque 8400 lb-in [95 daNm]

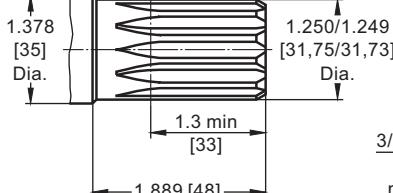

**R**

1 1/4" [31,75], SAE J501 Tapered, Parallel key 5/16"x 5/16"x 1"  
Max. Torque 8400 lb-in [95 daNm]

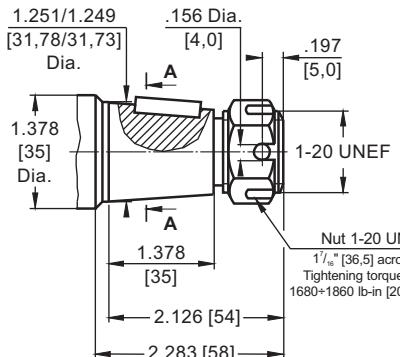

Requirement max. Torque must be not exceeded.

## ORDER CODE

1	2	3	4	5	6	7
MLHH						

**Pos.1 - Displacement code**

- 200** - 12.3 in<sup>3</sup>/rev [201,3 cm<sup>3</sup>/rev]
- 250** - 15.4 in<sup>3</sup>/rev [252,0 cm<sup>3</sup>/rev]
- 315** - 16.4 in<sup>3</sup>/rev [314,9 cm<sup>3</sup>/rev]
- 400** - 24.2 in<sup>3</sup>/rev [396,8 cm<sup>3</sup>/rev]
- 500** - 30.7 in<sup>3</sup>/rev [502,4 cm<sup>3</sup>/rev]

**Pos.3 - Port Size/Type** [standard manifold to each]

- 2** - side ports, 2xG1/2, G1/4, BSP thread, ISO 228
- 3** - side ports, 2xM22x1,5, M14x1,5, metric thread, ISO 262
- 4** - side ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF
- 5** - side ports, 2x1/2-14 NPTF, 7/16-20 UNF

**Pos.4 - Shaft Seal Version**

omit - Standard shaft seal

- U** - High pressure shaft seal (without check valves)

**Pos.5 - Drain Port**

omit - with drain port

- 1** - without drain port

**Pos.6 - Special Features** [see page 110]

**Pos.7 - Design Series**

omit - Factory specified

**NOTES:**

\* The permissible output torque for shafts must not be exceeded!

\*\* The following combination is not allowed: **B** shaft with **U** shaft seal.


The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS HW



## APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Grass cutting machinery etc.



## CONTENTS

Specification data .....	87÷89
Function diagrams .....	90÷98
Dimensions and mounting .....	99÷105
Permissible shaft seal pressure .....	106
Permissible shaft loads .....	106
Shaft extensions .....	107÷108
Order code .....	109

## OPTIONS

- » Model - Spool valve, roll-gerotor
- » Wheel and flange mount
- » Shafts - straight, splined and tapered
- » BSPP and SAE ports
- » Other special features


## GENERAL

Max. Displacement, in <sup>3</sup> /rev [cm <sup>3</sup> /rev]	45.99 [753,8]
Max. Speed, [RPM]	750
Max. Torque, lb-in [daNm]	cont.: 96 [8500] int.: 106 [9382]
Max. Output, HP [kW]	23,1 [31]
Max. Pressure Drop, PSI [bar]	cont.: 205 [3000] int.: 225 [3260]
Max. Oil Flow, GPM [lpm]	115 [30.4]
Min. Speed, [RPM]	10
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, °F [°C]	-40÷284 [-40÷140]
Optimal Viscosity range, SUS [mm <sup>2</sup> /s]	98÷347 [20÷75]
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure drop PSI [bar]	Viscosity SUS [mm <sup>2</sup> /s]	Oil flow in drain line GPM [lpm]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]

Pressure Losses

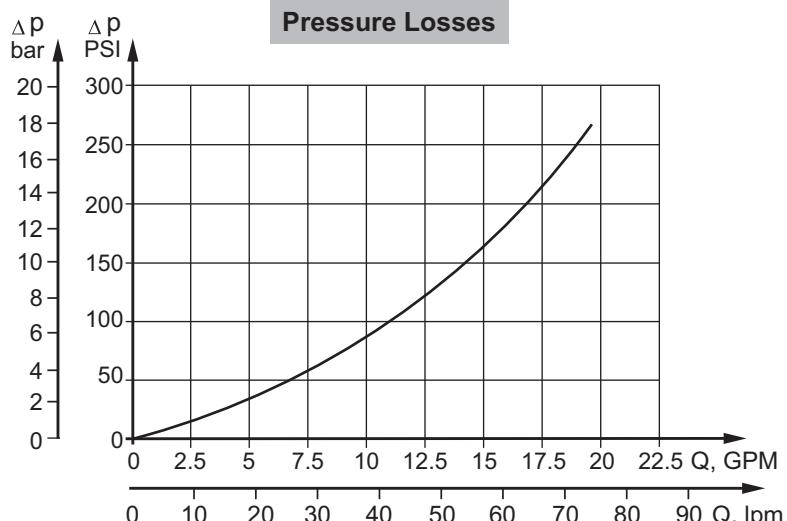

**SPECIFICATION DATA**

Type	HW 80	HW 100	HW 125	HW 160	HW 200	HW 235
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	4.86 [79,7]	6.19 [101,4]	7.69 [126]	9.63 [157,8]	12.28 [201,3]	14.36 [235,3]
<b>Max. Speed, [RPM]</b>	Cont. Int.*	565 750	445 590	357 476	380 475	373 497
<b>Max. Torque, lb-in [daNm]</b>	Cont. Int.*	1664 [18,8] 1956 [22,1]	2124 [24] 2496 [28,2]	3098 [35] 3408 [38,5]	3894 [44] 4248 [48]	4868 [55] 5310 [60]
<b>Max. Output, HP [kW]</b>	Cont. Int.*	20.7 [15,4] 23.3 [17,4]	21.2 [15,8] 24.3 [18,1]	21.7 [16,2] 26.6 [19,8]	23.6 [17,6] 29 [21,6]	24.9 [18,6] 31 [23,1]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont. Int.*	2540 [175] 2970 [205]	2540 [175] 2970 [205]	2970 [205] 3260 [225]	2970 [205] 3260 [225]	2970 [205] 3260 [225]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont. Int.*	12 [45] 16 [60]	12 [45] 16 [60]	12 [45] 16 [60]	16 [60] 20 [75]	20 [75] 26.4 [100]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont. Int.*	2900 [200] 3260 [225]	2900 [200] 3260 [225]	3050 [210] 3625 [250]	3050 [210] 3625 [250]	3050 [210] 3625 [250]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		174 [12]	174 [12]	145 [10]	145 [10]	145 [10]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max. press. drop Cont. At max. press. drop Int.*	1328 [15] 1558 [17,6]	1699 [19,2] 1991 [22,5]	2540 [28,7] 2788 [31,5]	3186 [36] 3478 [39,3]	3991 [45,1] 4355 [49,2]
<b>Min. Speed***, [RPM]</b>		12	12	10	10	10
<b>Weight, lb [kg]</b>	HW	31.1 [14,1]	31.3 [14,2]	31.5 [14,3]	32.2 [14,6]	33.3 [33,3]
	HWF	27.8 [12,6]	28.0 [12,7]	28.2 [12,8]	28.9 [13,1]	30.0 [13,6]
	HWFR	32.2 [14,6]	32.4 [14,7]	32.6 [14,8]	33.3 [15,1]	34.4 [15,6]
	HWFV	27.8 [12,6]	28.0 [12,7]	28.2 [12,8]	28.9 [13,1]	30.0 [13,6]
	HWS	30.4 [13,8]	30.6 [13,9]	30.9 [14,0]	31.5 [14,3]	32.6 [14,8]
	HWSW	29.8 [13,5]	30.0 [13,6]	30.2 [13,7]	30.9 [14,0]	31.9 [14,5]
	HWSR	34.8 [15,8]	35.1 [15,9]	35.3 [16,0]	35.9 [16,3]	37.0 [16,8]
	HWD	31.5 [14,3]	31.8 [14,4]	31.9 [14,5]	32.6 [14,8]	33.7 [15,3]
	HWV	30.4 [13,8]	30.6 [13,9]	30.9 [14,0]	31.5 [14,3]	32.6 [14,8]
	HWE	31.9 [14,5]	32.2 [14,6]	32.4 [14,7]	33.1 [15,0]	34.2 [15,5]
	HWSE	31.3 [14,2]	31.5 [14,3]	31.8 [14,4]	32.4 [14,7]	33.5 [15,2]
	HWFE	28.7 [13,0]	28.9 [13,1]	29.1 [13,2]	29.8 [13,5]	30.9 [14,0]
	HW(7,8,9,10)	35.3 [16,0]	35.5 [16,1]	35.7 [16,2]	36.4 [16,5]	37.5 [17,0]
	HWF(7,8,9,10)	31.9 [14,5]	32.2 [14,6]	32.4 [14,7]	33.1 [15,0]	34.2 [15,5]
	HWS(7,8,9,10)	34.6 [15,7]	34.8 [15,8]	35.1 [15,9]	35.7 [16,2]	36.8 [16,7]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* For speeds lower than given, consult factory or your regional manager.

\*\*\* For "E"-option and versions 7,8,9,10 it is not recommendable a flow bigger than 75% of the nominal flow rate.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## SPECIFICATION DATA

Type	HW 250	HW 300	HW 315	HW 350	HW 370	HW 400
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	15.38 [252]	300 [18.31]	314,9 [19.22]	21.22 [347,8]	22.53 [369,2]	24.21 [396,8]
<b>Max. Speed, [RPM]</b>	Cont. Int.*	298 397	250 333	238 318	216 288	203 271
<b>Max. Torque, lb-in [daNm]</b>	Cont. Int.*	6107 [69] 6638 [75]	7170 [81] 7877 [89]	7523 [85] 8230 [93]	8320 [94] 9028 [102]	8497 [96] 9293 [105]
<b>Max. Output, HP [kW]</b>	Cont. Int.*	22.5 [16,8] 27.9 [20,8]	22 [16,5] 27.9 [20,8]	21.9 [16,4] 27.9 [20,8]	22 [16,5] 27.9 [20,8]	17.7 [13,2] 25.7 [19,2]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont. Int.*	2970 [205] 3260 [225]	2970 [205] 3260 [225]	2970 [205] 3260 [225]	2970 [205] 3200 [220]	200 [2900] 2680 [185]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont. Int.*	20 [75] 26.4 [100]	20 [75] 26.4 [100]	20 [75] 26.4 [100]	20 [75] 26.4 [100]	20 [75] 26.4 [100]
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont. Int.*	3050 [210] 3625 [250]	3050 [210] 3625 [250]	3050 [210] 3625 [250]	3050 [210] 3625 [250]	3050 [210] 3625 [250]
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	145 [10]	145 [10]	145 [10]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max. press. drop Cont. At max. press. drop Int.*	5000 [56,5] 5443 [61,5]	5877 [66,4] 6452 [72,9]	6169 [69,7] 6744 [76,2]	6815 [77] 7400 [83,6]	7036 [79,5] 7612 [86]
<b>Min. Speed***, [RPM]</b>		10	10	10	8	8
<b>Weight, lb [kg]</b>	HW	34.6 [15,7]	16,1 [35.5]	35.9 [16,3]	36.8 [16,7]	37.3 [16,9]
	HWF	31.3 [14,2]	14,6 [32.2]	32.6 [14,8]	33.5 [15,2]	34.0 [15,4]
	HWFR	35.7 [16,2]	16,6 [36.6]	37.0 [16,8]	37.9 [17,2]	38.4 [17,4]
	HWFV	31.3 [14,2]	14,6 [32.2]	32.6 [14,8]	33.5 [15,2]	34.0 [15,4]
	HWS	34.0 [15,4]	15,8 [34.8]	35.3 [16,0]	36.2 [16,4]	36.6 [16,6]
	HWSW	33.3 [15,1]	15,5 [34.2]	34.6 [15,7]	35.5 [16,1]	35.9 [16,3]
	HWSR	38.4 [17,4]	17,8 [39.2]	39.7 [18,0]	40.6 [18,4]	41.0 [18,6]
	HWD	35.1 [15,9]	35.9 [35.9]	36.4 [16,5]	37.0 [16,8]	37.7 [17,1]
	HWV	34.0 [15,4]	15,8 [34.8]	35.3 [16,0]	36.2 [16,4]	36.6 [16,6]
	HWE	35.5 [16,1]	16,5 [36.4]	36.8 [16,7]	37.7 [17,1]	38.1 [17,3]
	HWSE	34.8 [15,8]	16,2 [35.7]	36.2 [16,4]	37.0 [16,8]	37.5 [17,0]
	HWFE	32.2 [14,6]	15,0 [33.1]	33.5 [15,2]	34.4 [15,6]	34.8 [15,8]
	HW(7,8,9,10)	38.8 [17,6]	18,0 [39.7]	40.1 [18,2]	41.0 [18,6]	41.4 [18,8]
	HWF(7,8,9,10)	35.5 [16,1]	16,5 [36.4]	36.8 [16,7]	37.7 [17,1]	38.1 [17,3]
	HWS(7,8,9,10)	38.1 [17,3]	17,7 [39.0]	39.5 [17,9]	40.3 [18,3]	40.8 [18,5]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* For speeds lower than given, consult factory or your regional manager.

\*\*\* For "E"-option and versions 7,8,9,10 it is not recommendable a flow bigger than 75% of the nominal flow rate.

1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## SPECIFICATION DATA

Type	HW 470	HW 500	HW 535	HW 550	HW 600	HW 750
<b>Displacement, in<sup>3</sup>/rev [cm<sup>3</sup>/rev]</b>	28.72 [470,6]	30.66 [502,4]	32.65 [535]	33.56 [550]	36.55 [598,9]	45.99 [753,8]
<b>Max. Speed, [RPM]</b>	Cont. Int.*	159 244	149 229	140 215	136 209	125 192
<b>Max. Torque, lb-in [daNm]</b>	Cont. Int.*	8143 [92] 8939 [101]	8054 [91] 8939 [101]	7966 [90] 9205 [104]	7877 [89] 9293 [105]	8054 [91] 9382 [106]
<b>Max. Output, HP [kW]</b>	Cont. Int.*	14.2 [10,6] 23.3 [17,4]	14.5 [10,8] 23.9 [17,8]	9.4 [12.6] 16.4 [22]	12 [9] 21.2 [15,8]	11.7 [8,7] 20.2 [20.2]
<b>Max. Pressure Drop, PSI [bar]</b>	Cont. Int.*	2180 [150] 2390 [165]	2030 [140] 2250 [155]	130 [1885] 150 [2180]	1815 [125] 2105 [145]	1670 [115] 1960 [135]
<b>Max. Oil Flow, GPM [lpm]</b>	Cont. Int.*	20 [75] 30.4 [115]				
<b>Max. Inlet Pressure, PSI [bar]</b>	Cont. Int.*	3050 [210] 250 [250]				
<b>Max. Starting Pressure with Unloaded Shaft, PSI [bar]</b>		145 [10]	145 [10]	145 [10]	145 [10]	145 [10]
<b>Min. Starting Torque, lb-in [daNm]</b>	At max. press. drop Cont. At max. press. drop Int.*	6674 [75,4] 7328 [82,8]	6603 [74,6] 7328 [82,8]	6532 [73,8] 7540 [85,2]	6452 [72,9] 7470 [84,4]	6373 [72,0] 7417 [83,8]
<b>Min. Speed***, [RPM]</b>		8	8	5	5	4
<b>Weight, lb [kg]</b>	HW	39.9 [18,1]	40.6 [18,4]	41.5 [18,8]	41.7 [18,9]	44.9 [20,4]
	HWF	36.6 [16,6]	37.3 [16,9]	38.1 [17,3]	38.4 [17,4]	41.4 [18,8]
	HWFR	37.0 [16,8]	41.7 [18,9]	42.5 [19,3]	42.8 [19,4]	46.3 [21,0]
	HWFV	36.6 [16,6]	37.3 [16,9]	38.1 [17,3]	38.4 [17,4]	41.4 [18,8]
	HWS	39.2 [17,8]	39.9 [18,1]	40.8 [18,5]	41.0 [18,6]	44.3 [20,1]
	HWSW	38.6 [17,5]	39.2 [17,8]	40.1 [18,2]	40.3 [18,3]	43.7 [19,8]
	HWSR	43.7 [19,8]	44.3 [20,1]	45.2 [20,5]	45.4 [20,6]	48.9 [22,2]
	HWD	40.3 [18,3]	41.0 [18,6]	41.9 [19,0]	42.1 [19,1]	45.4 [20,6]
	HWV	39.2 [17,8]	39.9 [18,1]	40.8 [18,5]	41.0 [18,6]	44.3 [20,1]
	HWE	40.8 [18,5]	41.7 [18,9]	42.3 [19,2]	42.5 [19,3]	45.9 [20,8]
	HWSE	40.1 [18,2]	40.8 [18,5]	41.7 [18,9]	41.9 [19,0]	45.2 [20,5]
	HWFE	37.5 [17,0]	38.1 [17,3]	39.0 [17,7]	39.2 [17,8]	42.3 [19,2]
	HW(7,8,9,10)	44.1 [20,0]	44.6 [20,3]	45.6 [20,7]	45.9 [20,8]	49.2 [22,3]
	HWF(7,8,9,10)	40.8 [18,5]	41.4 [18,8]	42.3 [19,2]	42.5 [19,3]	45.6 [20,7]
	HWS(7,8,9,10)	43.4 [19,7]	44.1 [20,0]	44.9 [20,4]	45.2 [20,5]	48.5 [22,0]

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* For speeds lower than given, consult factory or your regional manager.

\*\*\* For "E"-option and versions 7,8,9,10 it is not recommendable a flow bigger than 75% of the nominal flow rate.


1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm<sup>2</sup>/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

**FUNCTION DIAGRAMS**

**HW 80**

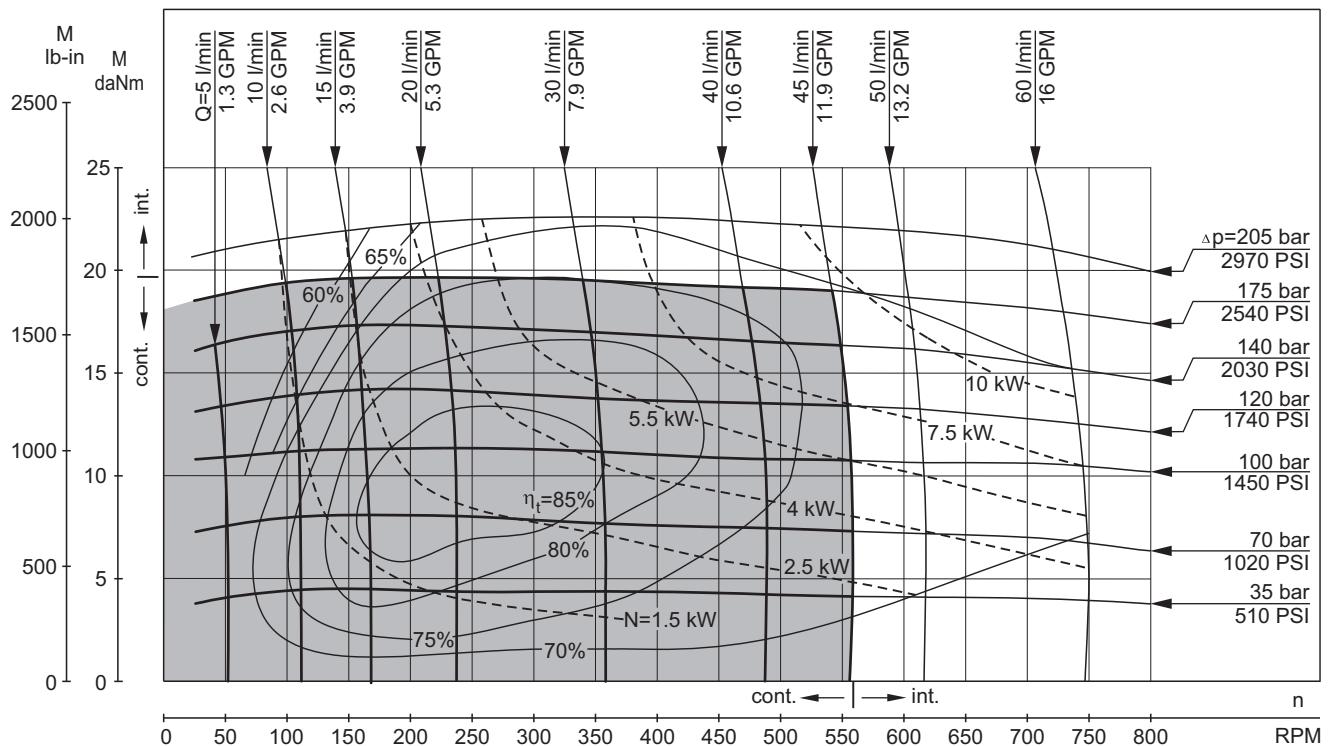


**HW 100**

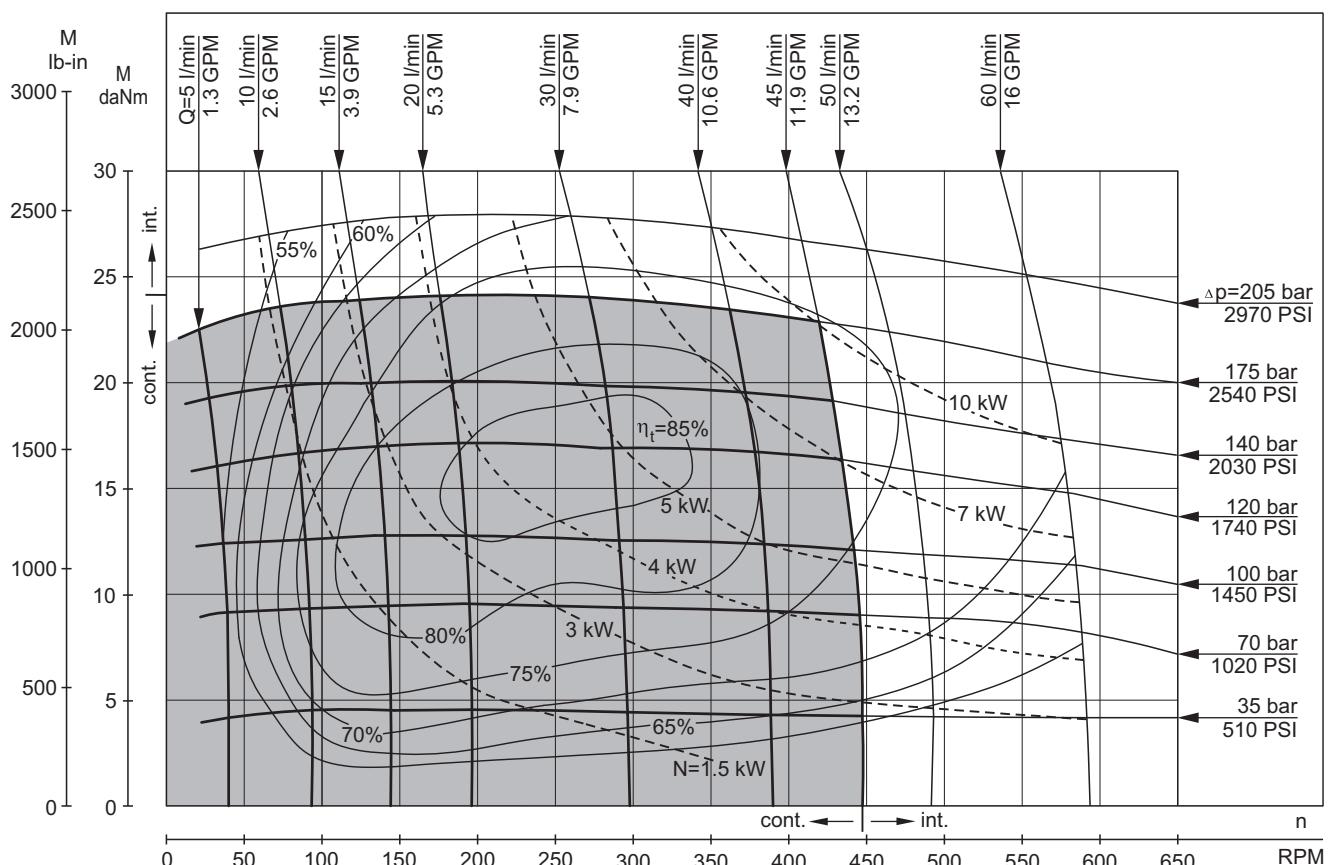


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI/145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

HW 125

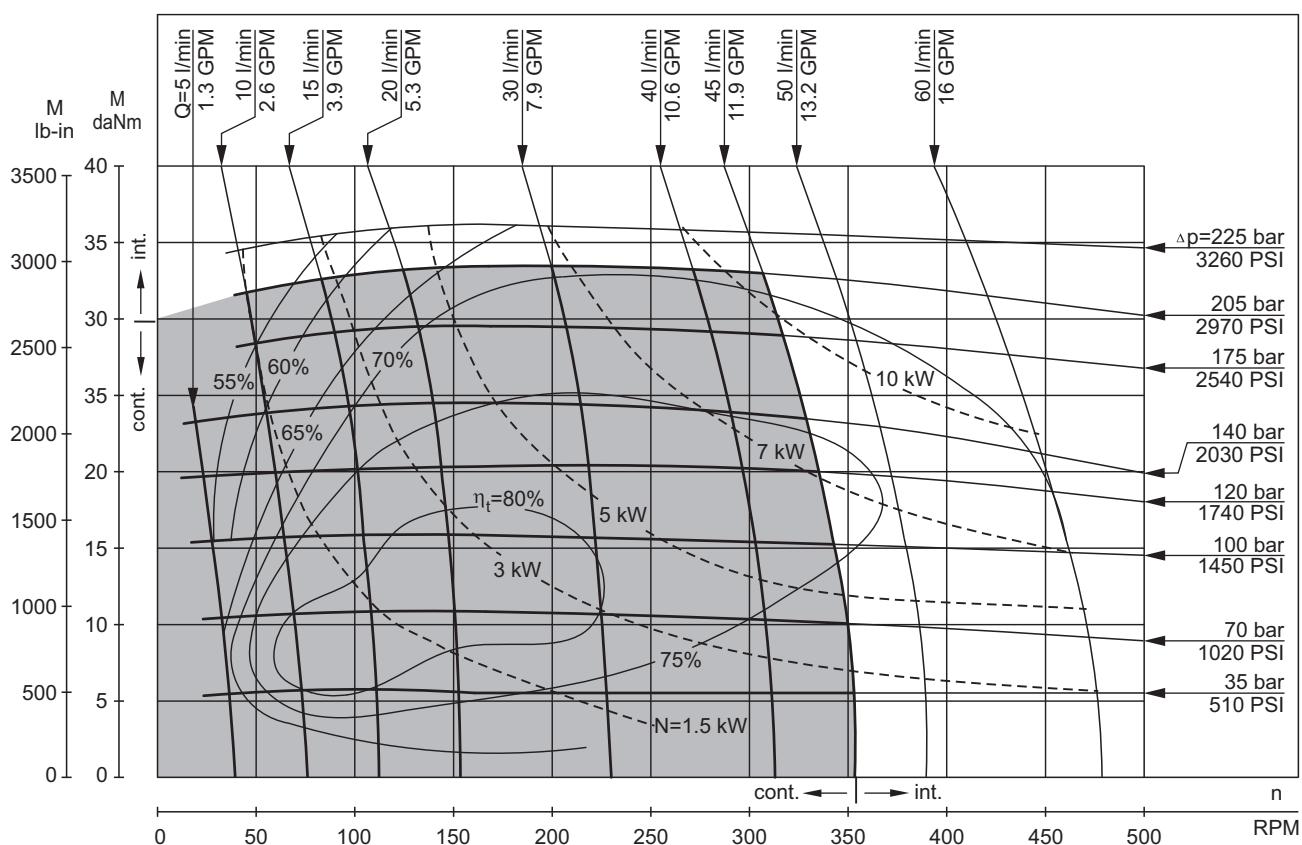


HW 160

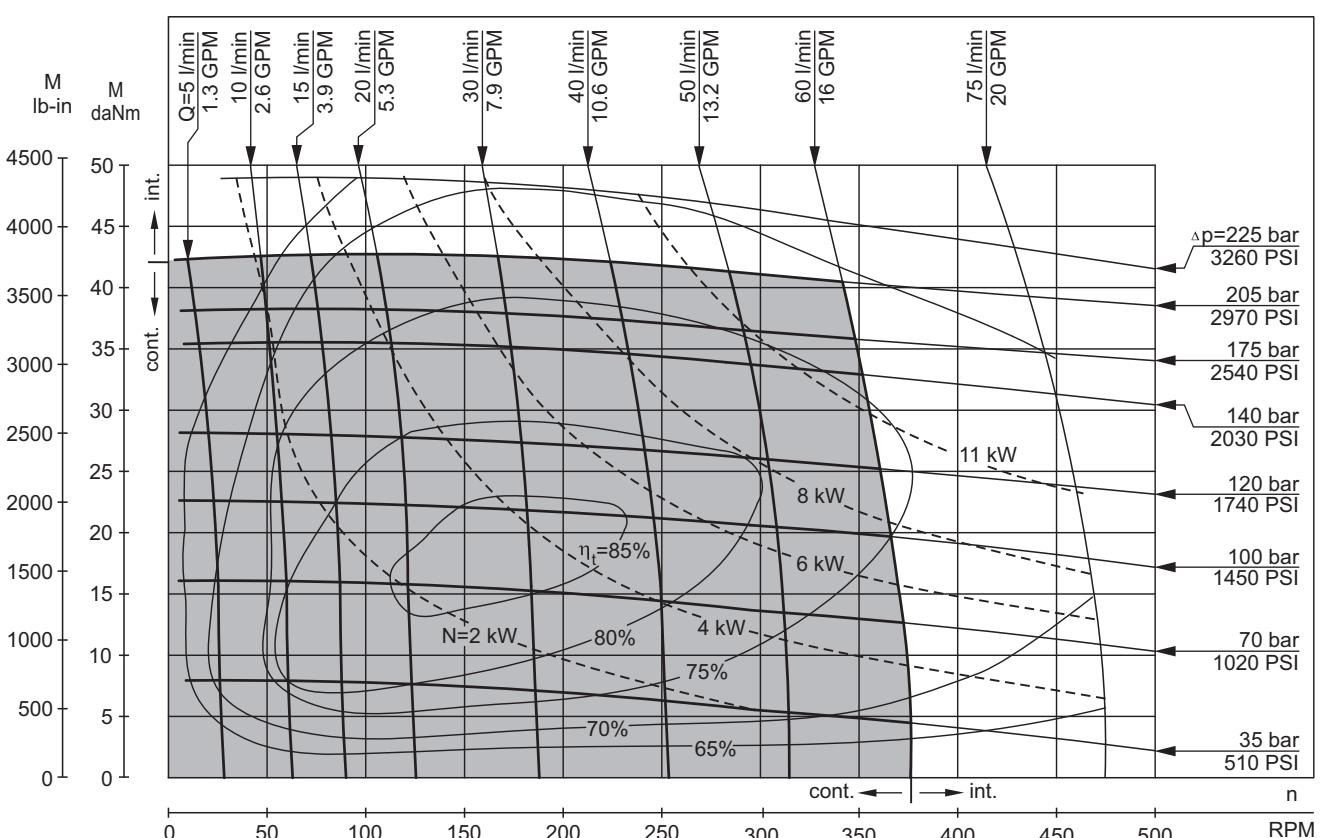


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI/145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

HW 200

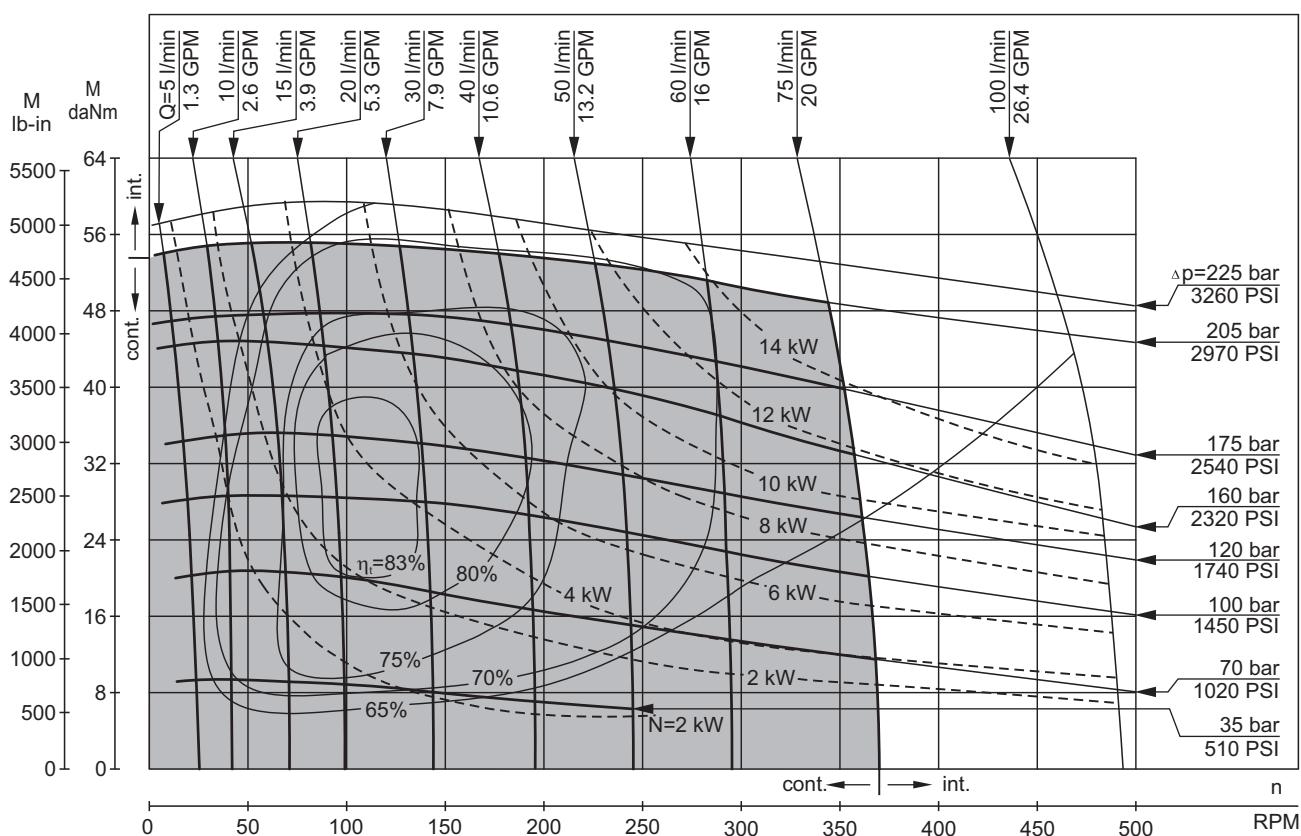


HW 235

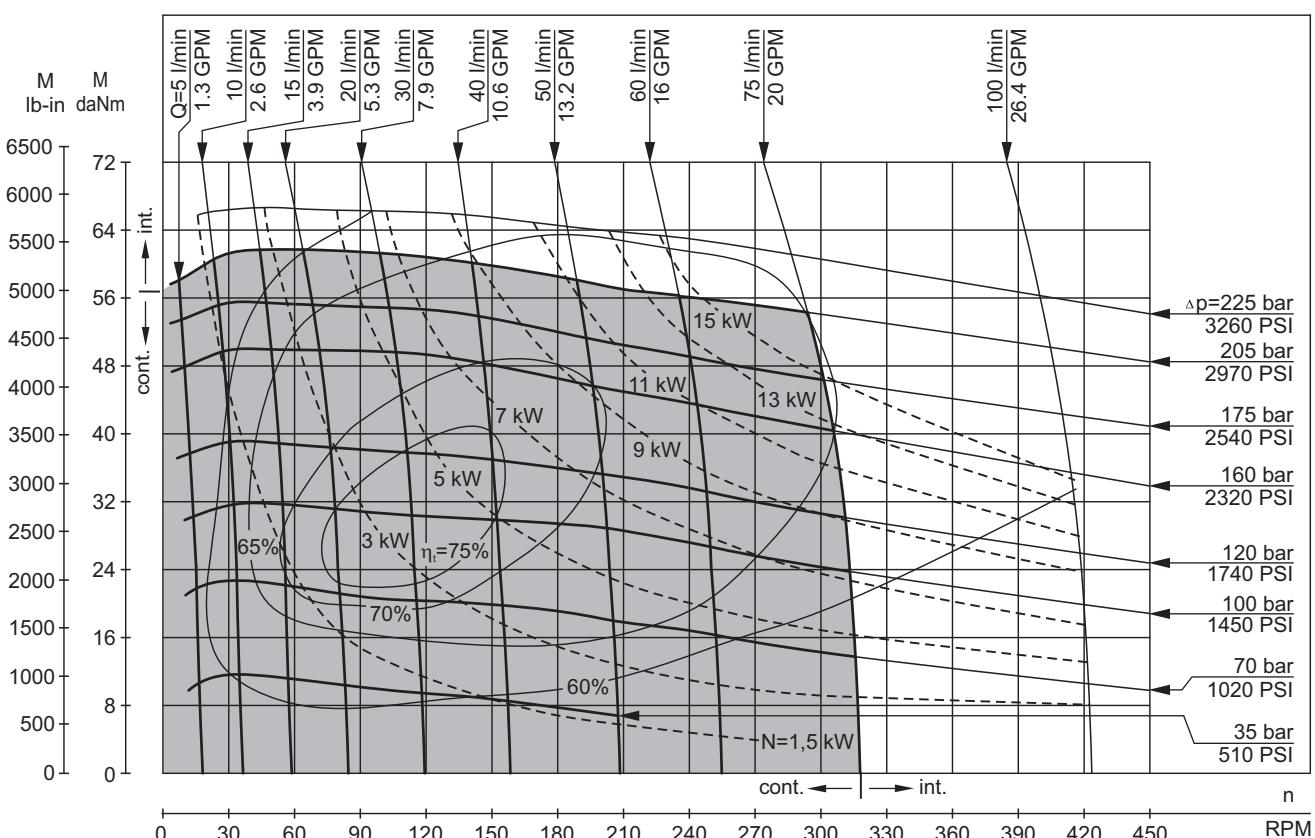


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI/145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

HW 250

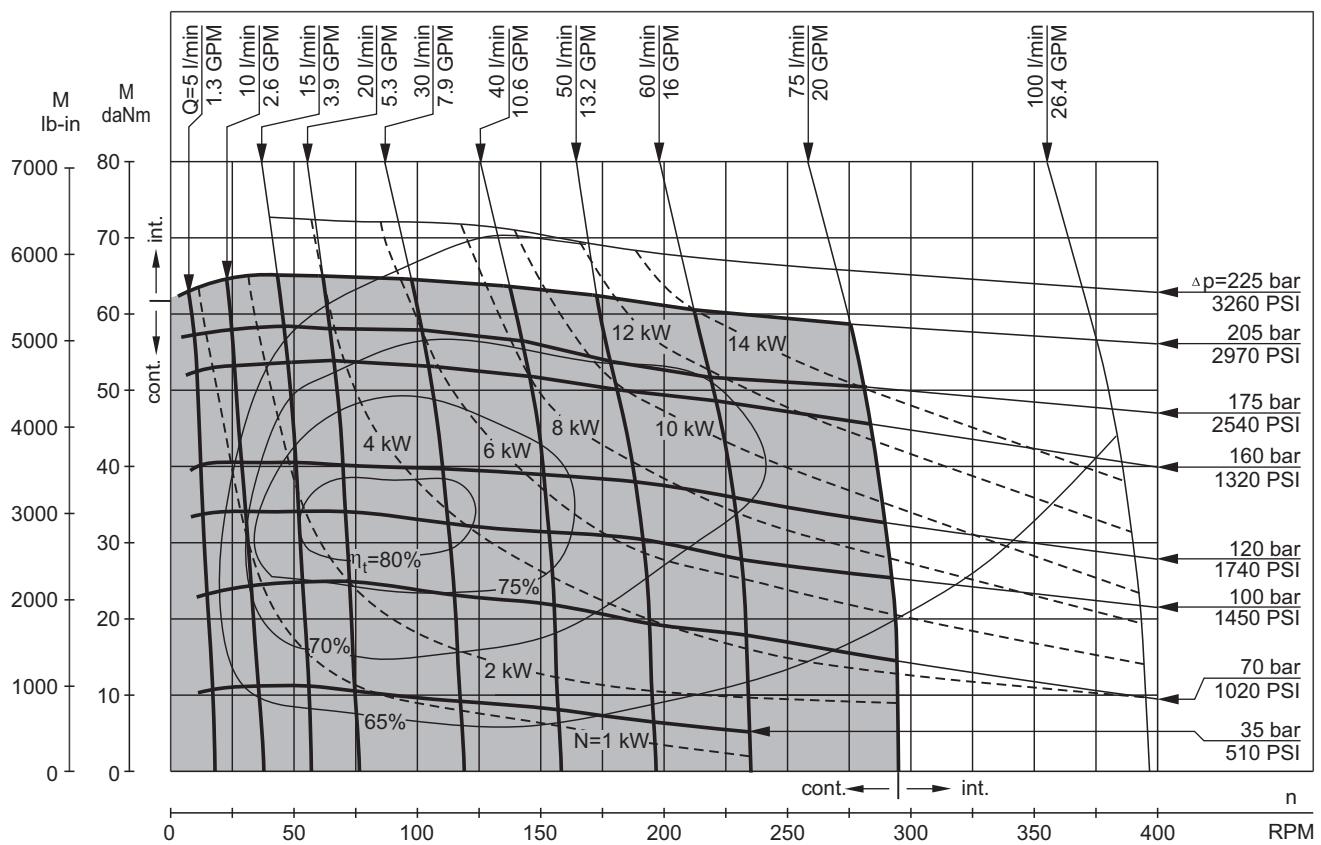


HW 300

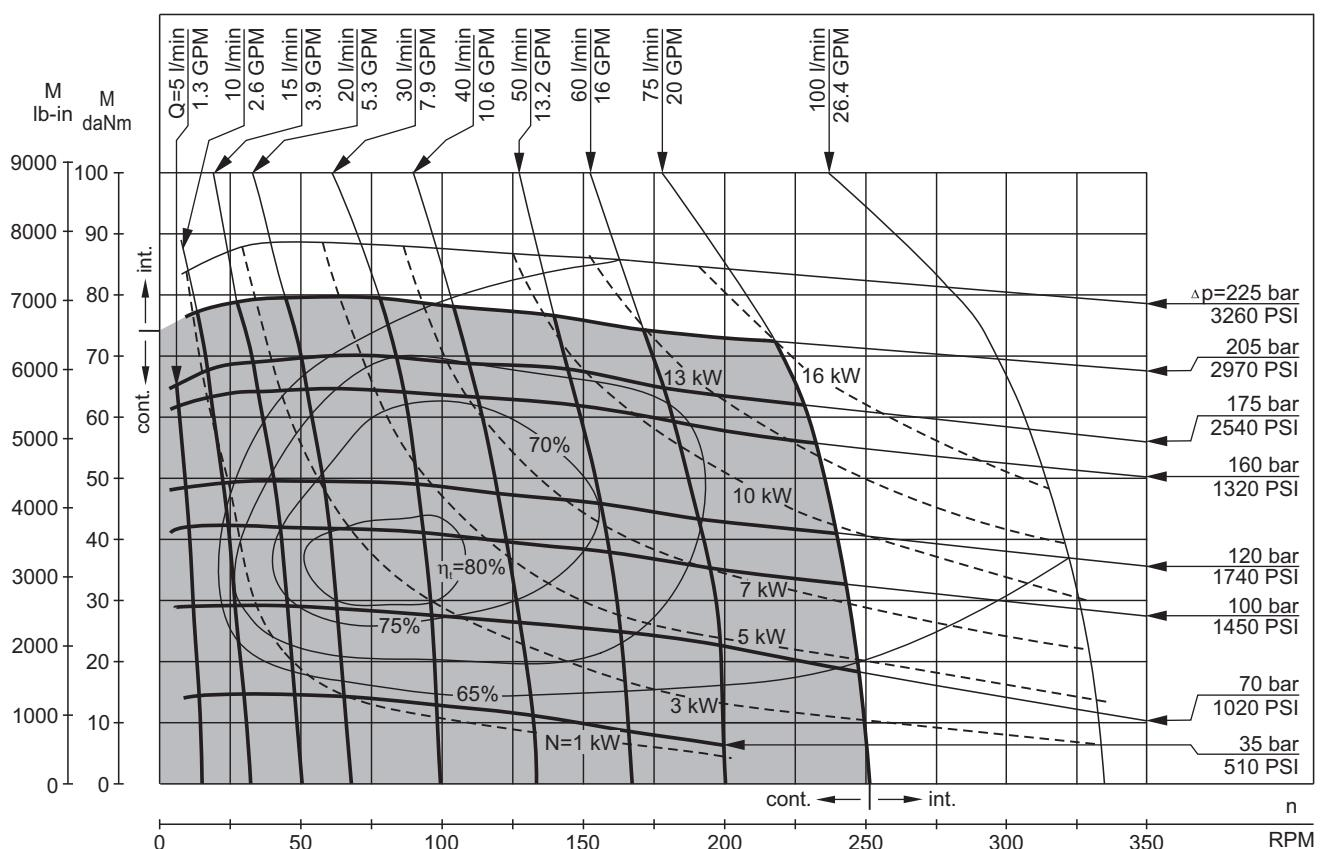


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI $\pm$ 145 PSI [5 $\pm$ 10 bar] and oil with viscosity of 150 SUS [32 mm $^2$ /s] at 122°F [50°C].

## FUNCTION DIAGRAMS

HW 315

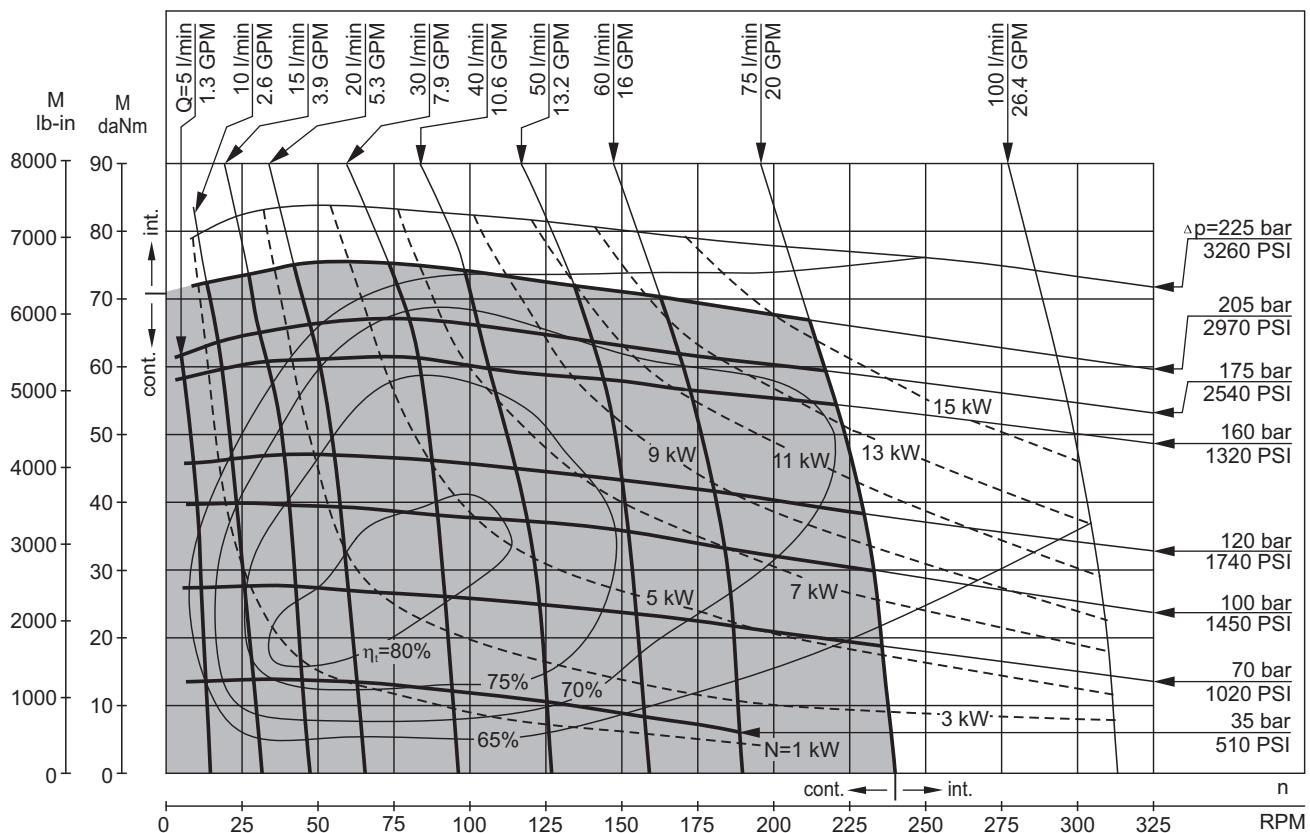


HW 350

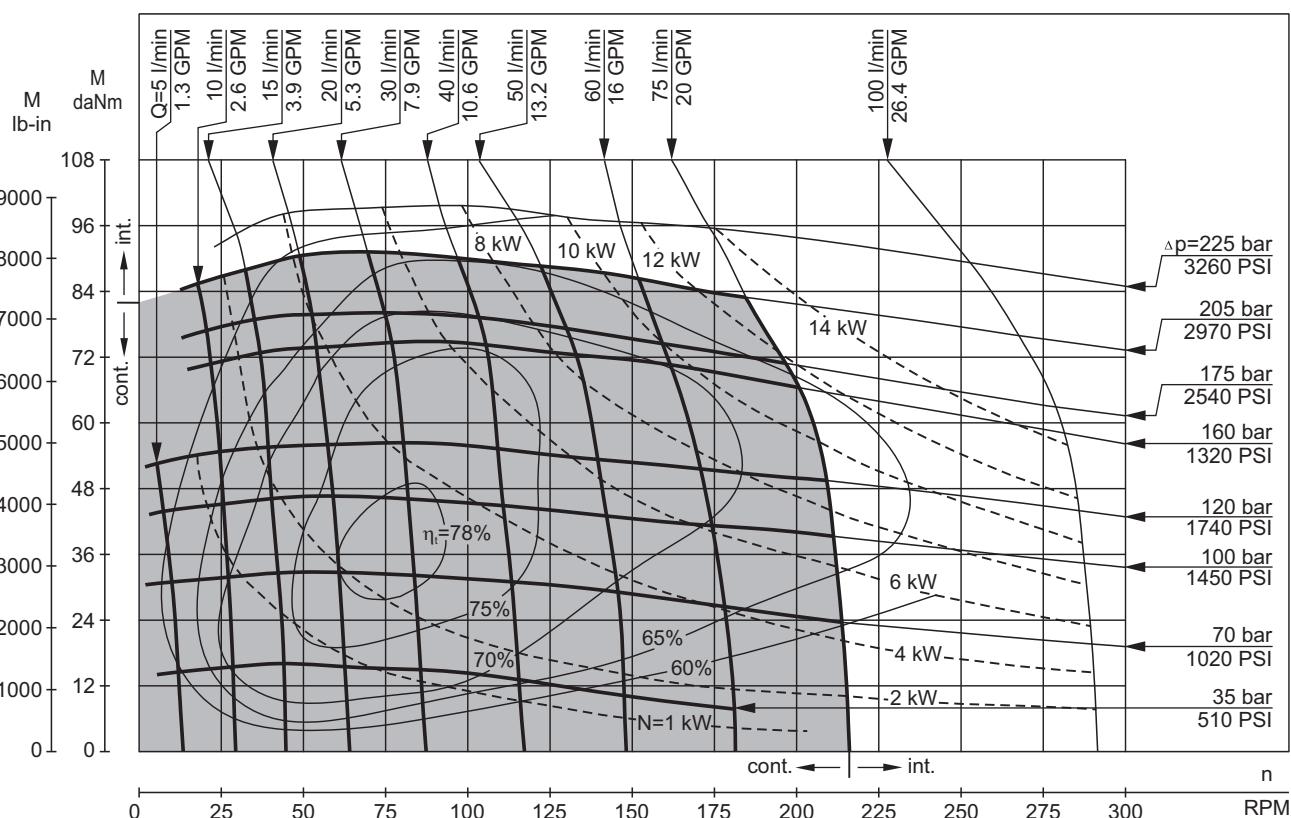


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI / 145 PSI [5–10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

HW 370

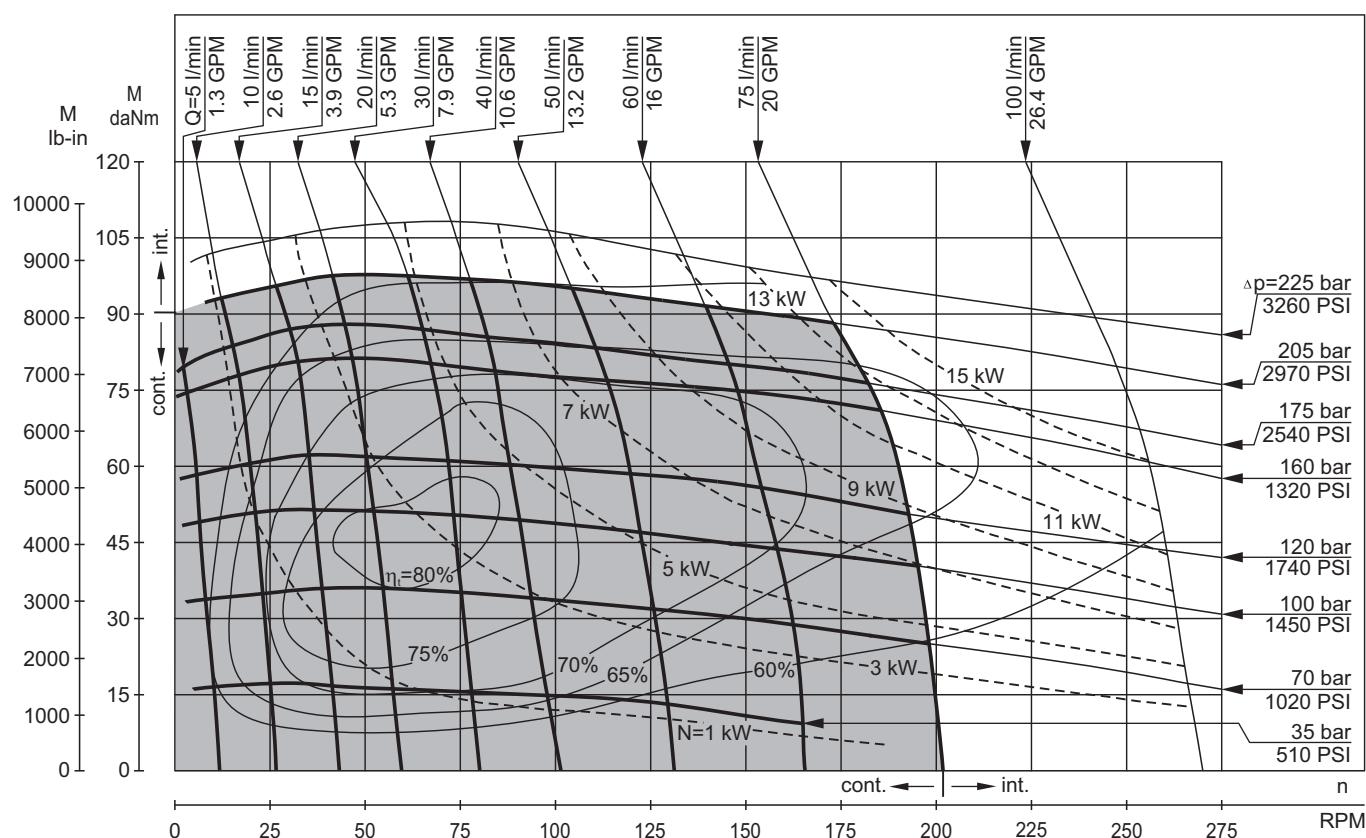


HW 400

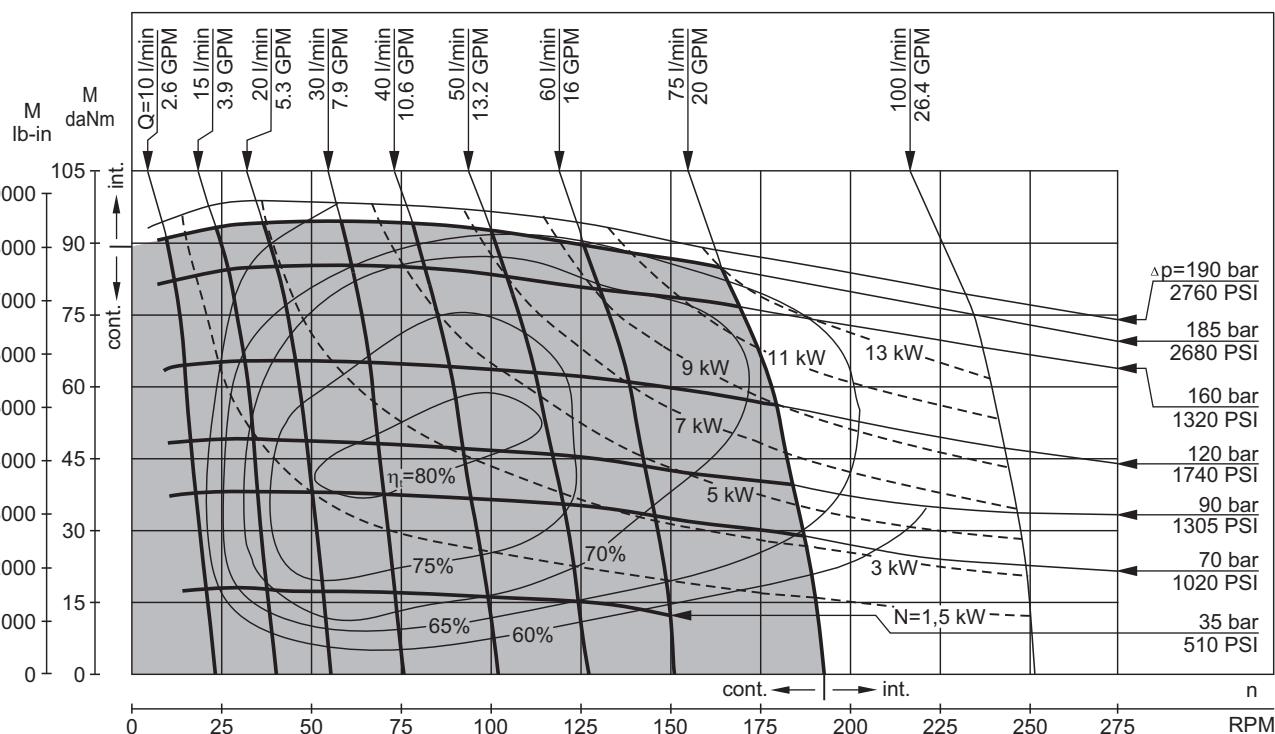


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI  $\pm$  145 PSI [5  $\pm$  10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

HW 470

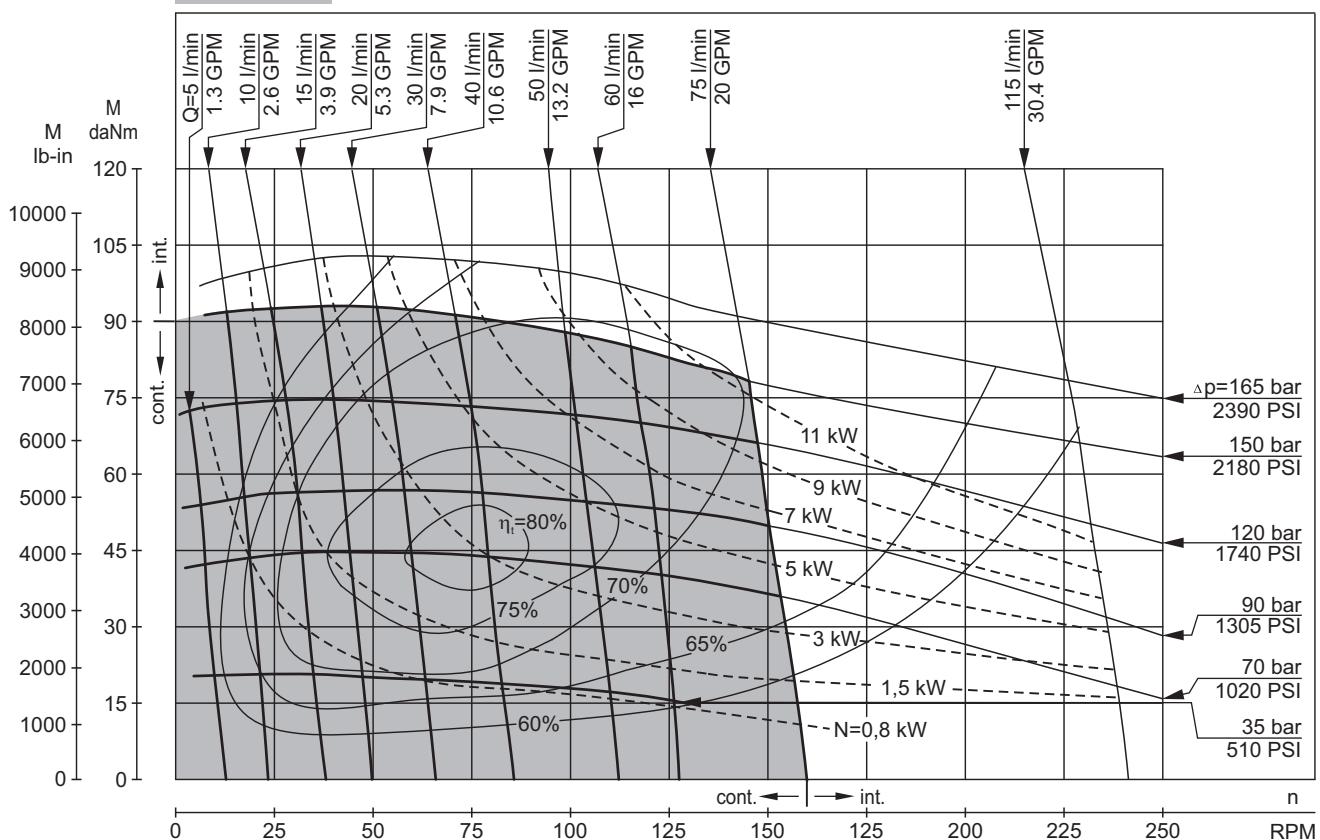


HW 500

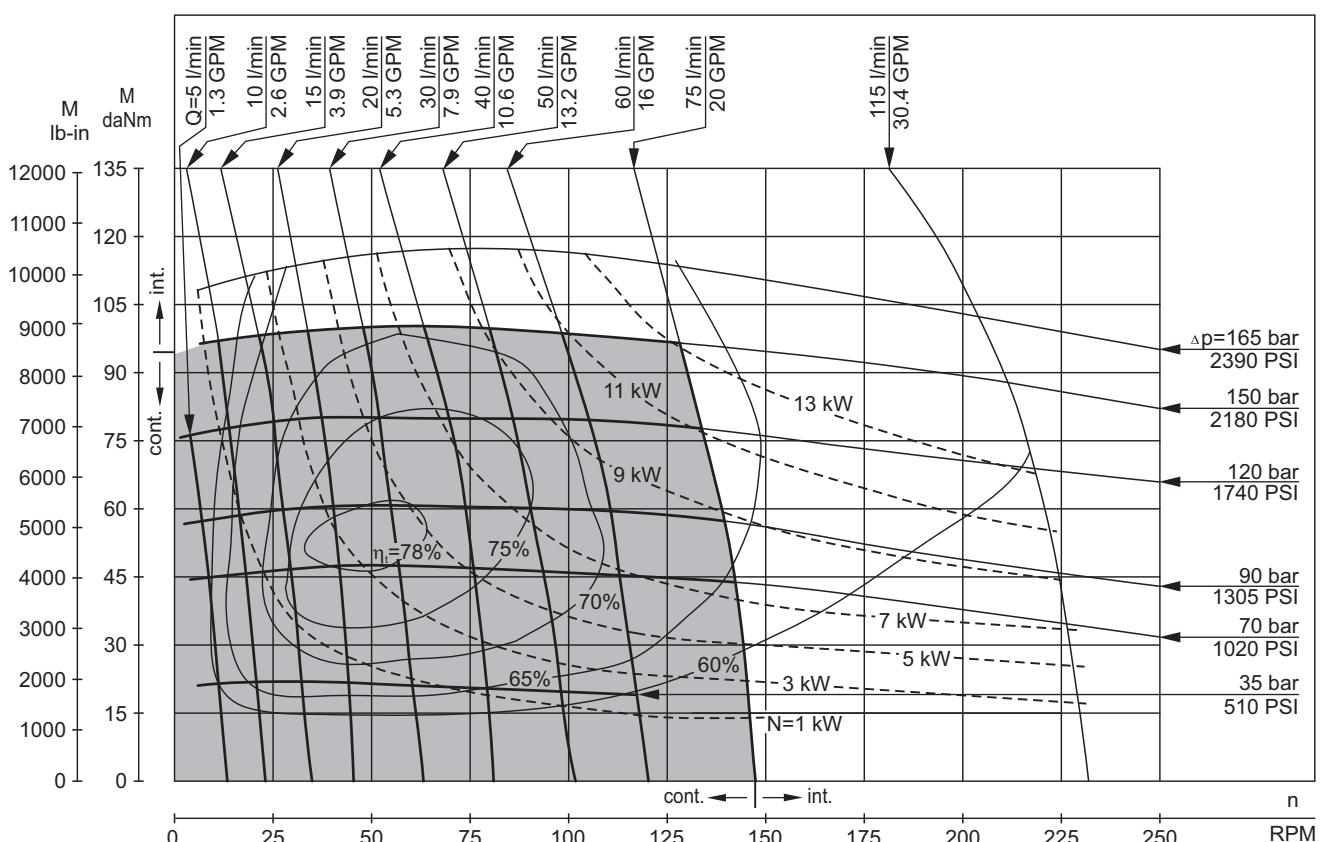


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI $\pm$ 145 PSI [5 $\pm$ 10 bar] and oil with viscosity of 150 SUS [32 mm $^2$ /s] at 122°F [50°C].

## HW 535

## FUNCTION DIAGRAMS

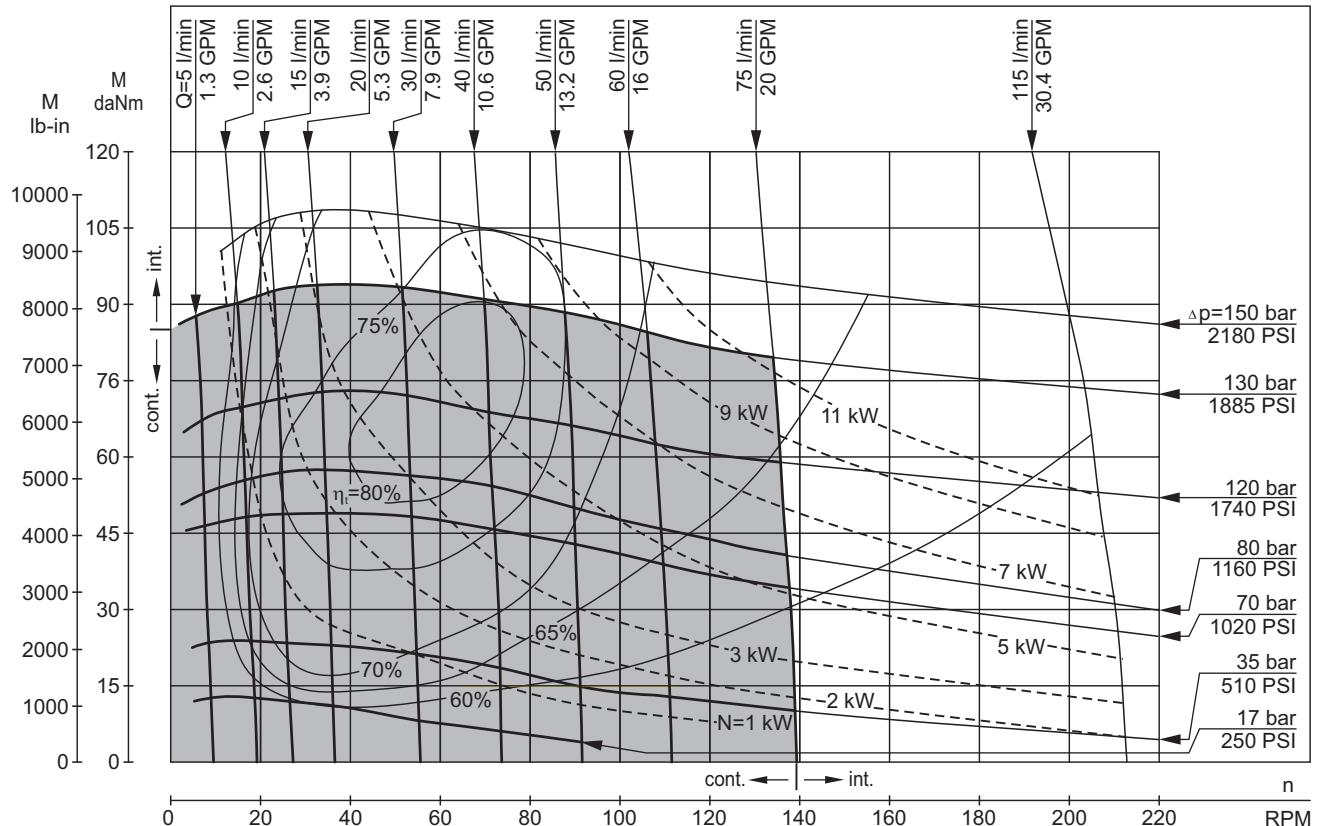


## HW 550

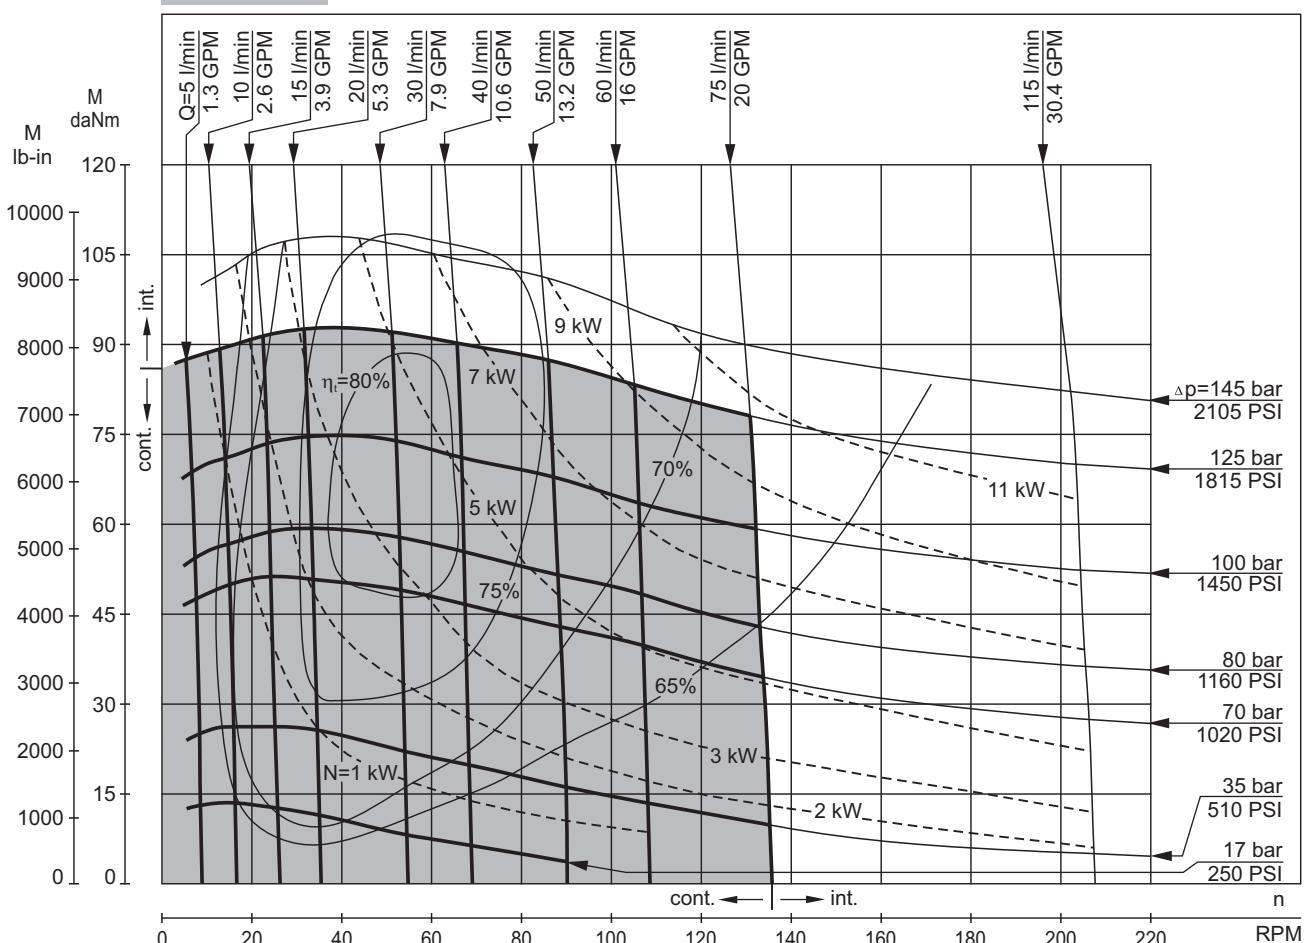


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI/145 PSI [5±10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## FUNCTION DIAGRAMS

HW 600

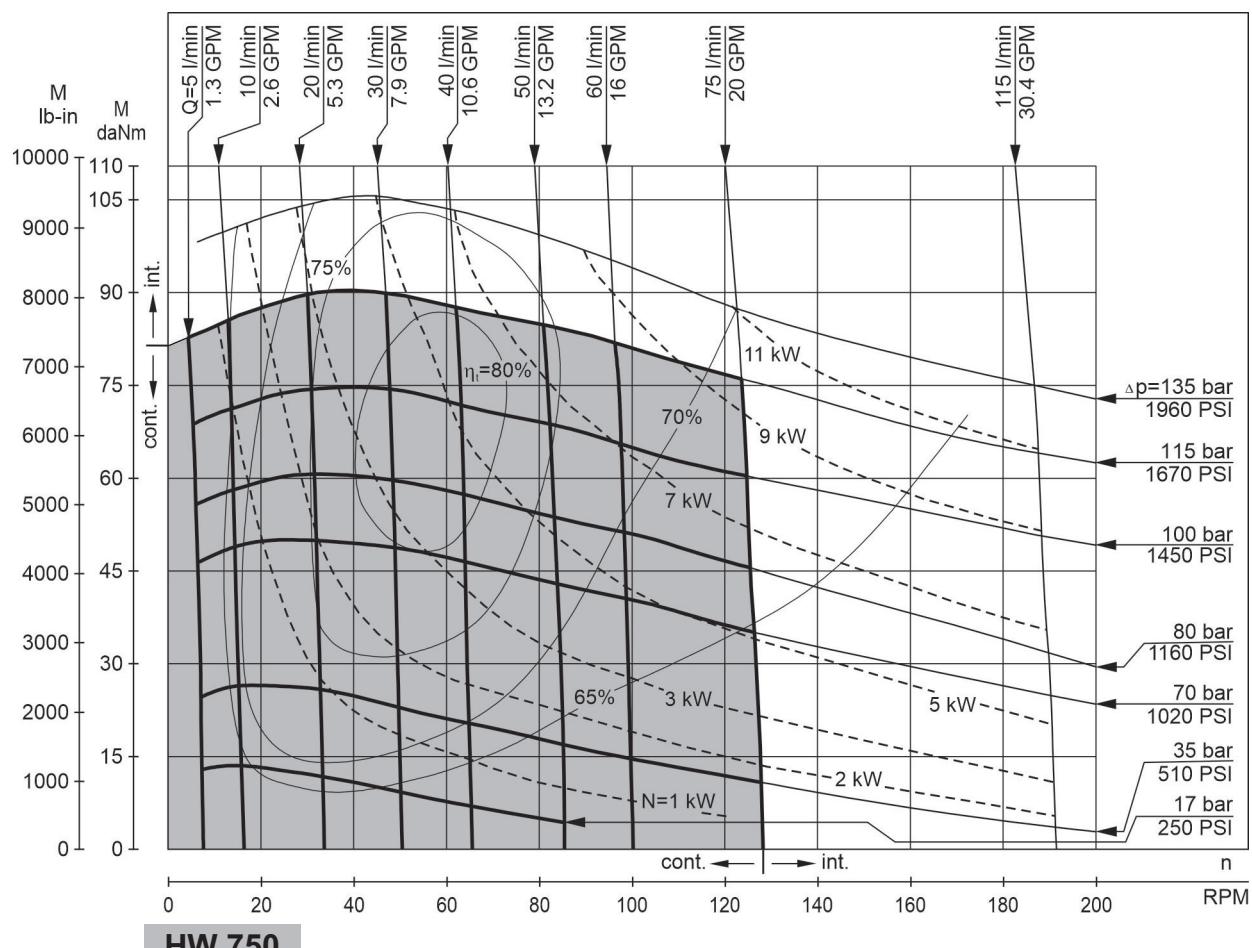


HW 750

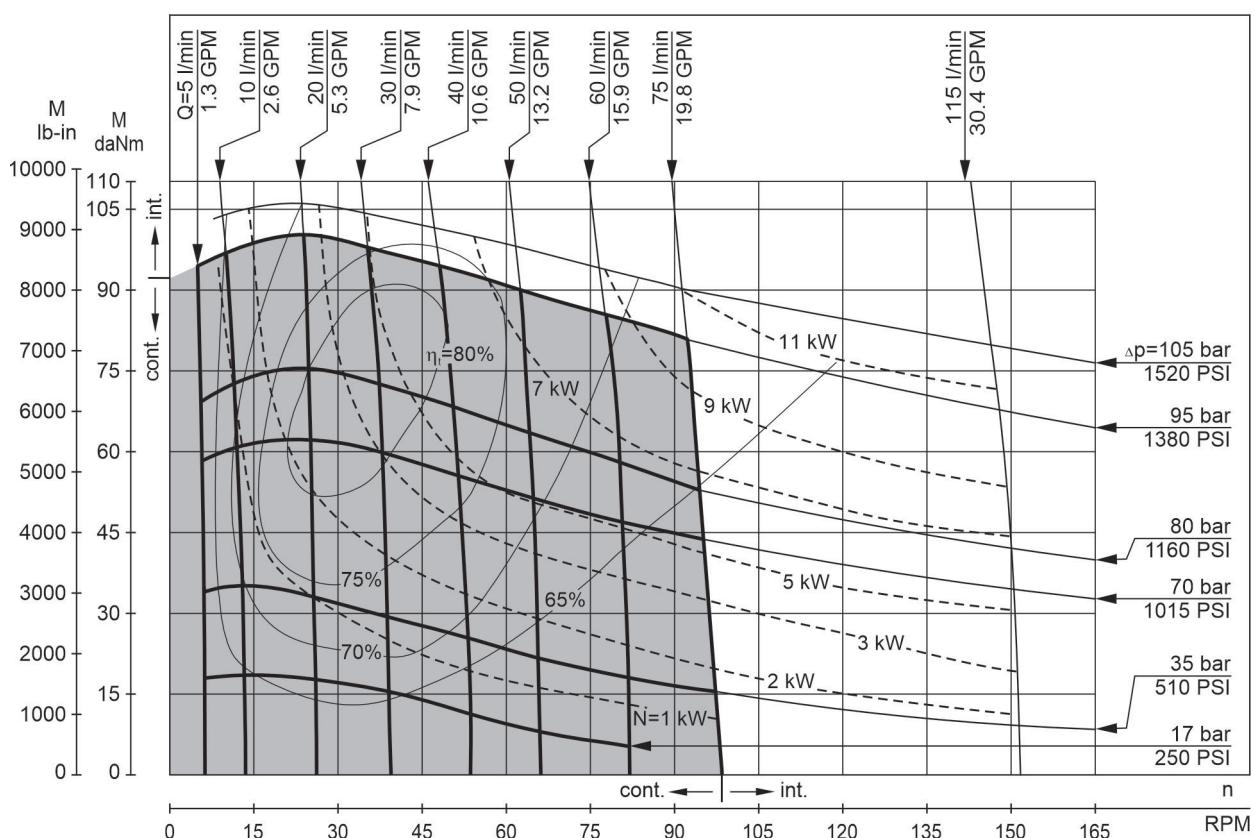


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5 PSI / 145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm<sup>2</sup>/s] at 122°F [50°C].

## DIMENSIONS and MOUNTING DATA

### HW Wheel mount

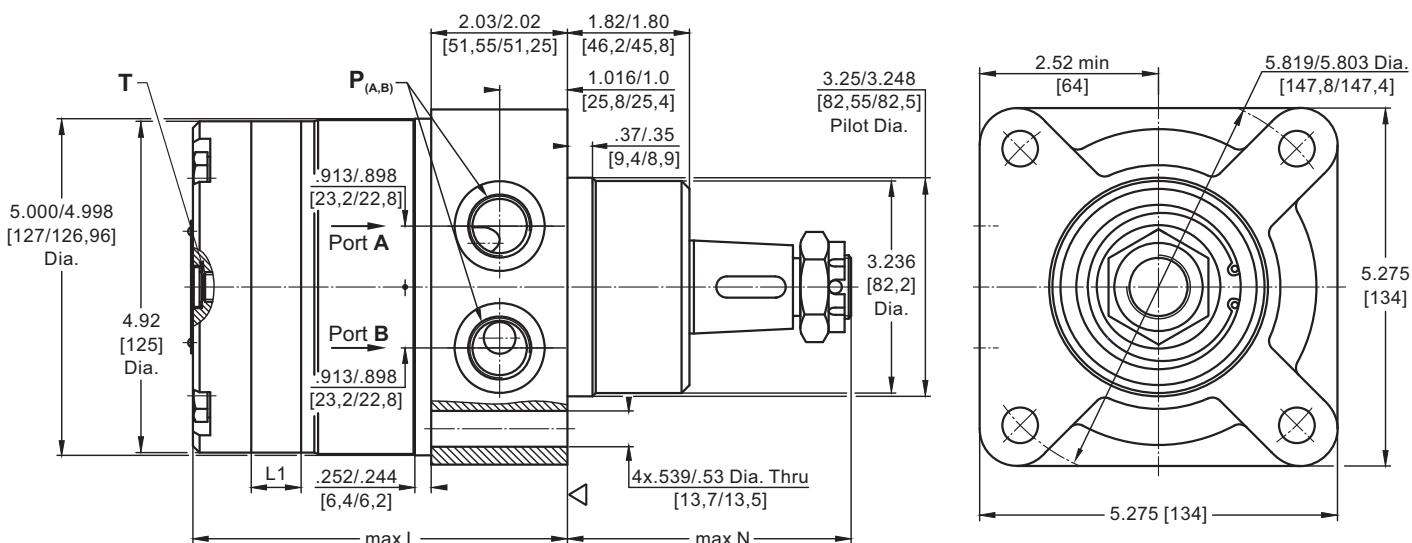

### HWS Wheel mount

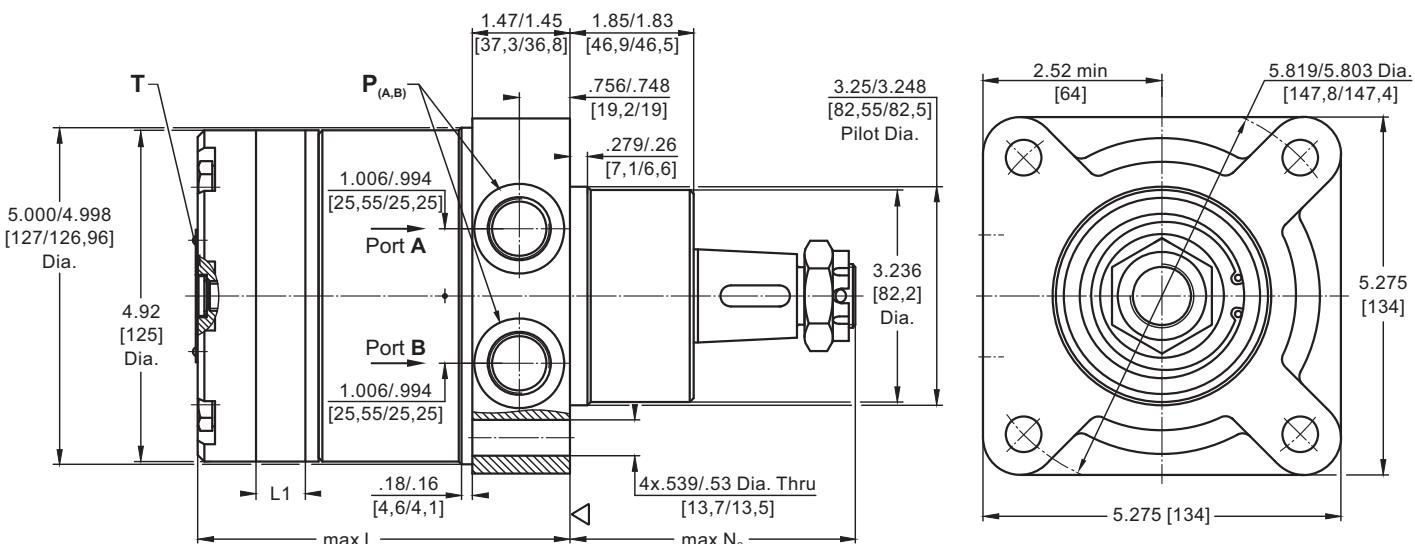

Type	*L, in [mm]	L1, in [mm]
HW(S) 80	5.28 [134,0]	.43 [ 11,0]
HW(S) 100	5.39 [137,0]	.55 [ 14,0]
HW(S) 125	5.51 [140,5]	.68 [ 17,4]
HW(S) 160	5.71 [145,0]	.86 [ 21,8]
HW(S) 200	5.95 [151,0]	1.09 [ 27,8]
HW(S) 235	6.12 [155,5]	1.28 [ 32,5]
HW(S) 250	6.22 [158,0]	1.37 [ 34,8]
HW(S) 300	6.48 [164,5]	1.63 [ 41,4]
HW(S) 315	6.56 [166,5]	1.71 [ 43,5]
HW(S) 350	6.73 [171,0]	1.89 [ 48,0]
HW(S) 370	6.85 [174,0]	2.01 [ 51,0]
HW(S) 400	7.01 [178,0]	2.16 [ 54,8]
HW(S) 470	7.40 [188,0]	2.56 [ 65,0]
HW(S) 500	7.58 [192,5]	2.73 [ 69,4]
HW(S) 535	7.76 [197,0]	2.92 [ 74,1]
HW(S) 550	7.84 [199,0]	2.99 [ 76,0]
HW(S) 600	8.11 [206,0]	3.25 [ 82,6]
HW(S) 750	8.96 [227,5]	4.09 [104,0]



	Versions	
	[2]	[4]
P <sub>(A,B)</sub>	2xG½	2x7/8-14UNF, O-ring
T	G¼	7/16-20UNF, O-ring

#### Standard Rotation

Viewed from Shaft End  
Port A Pressurized - **CW**  
Port B Pressurized - **CCW**

#### Reverse Rotation




Viewed from Shaft End  
Port A Pressurized - **CCW**  
Port B Pressurized - **CW**

\* For LSV option the dimension L is .118 in [3 mm] greater.


## DIMENSIONS and MOUNTING DATA

## HWSE Wheel mount, rear ports


## HWFE Magneto mount

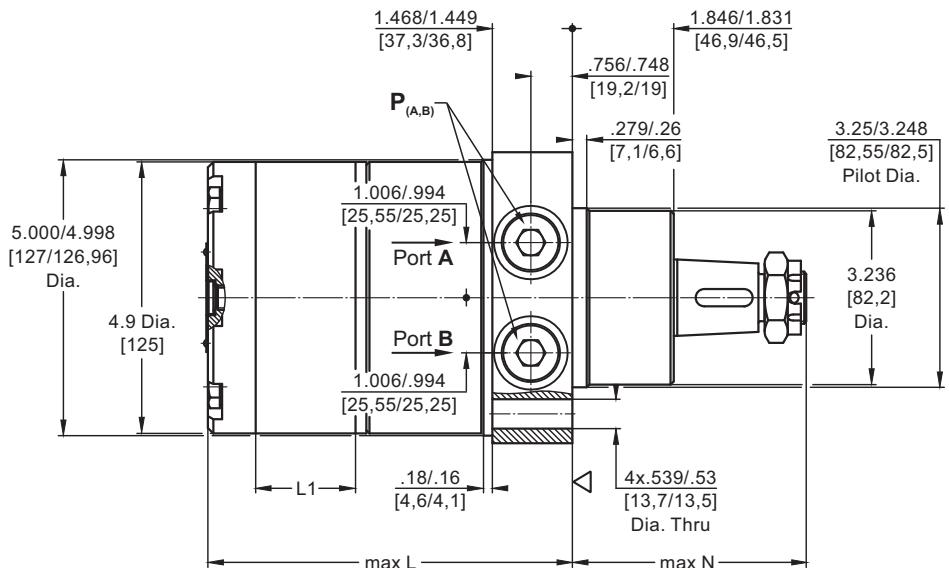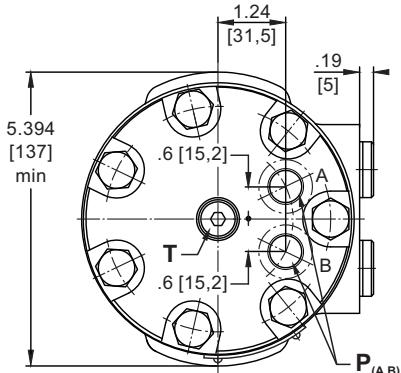

in [mm]

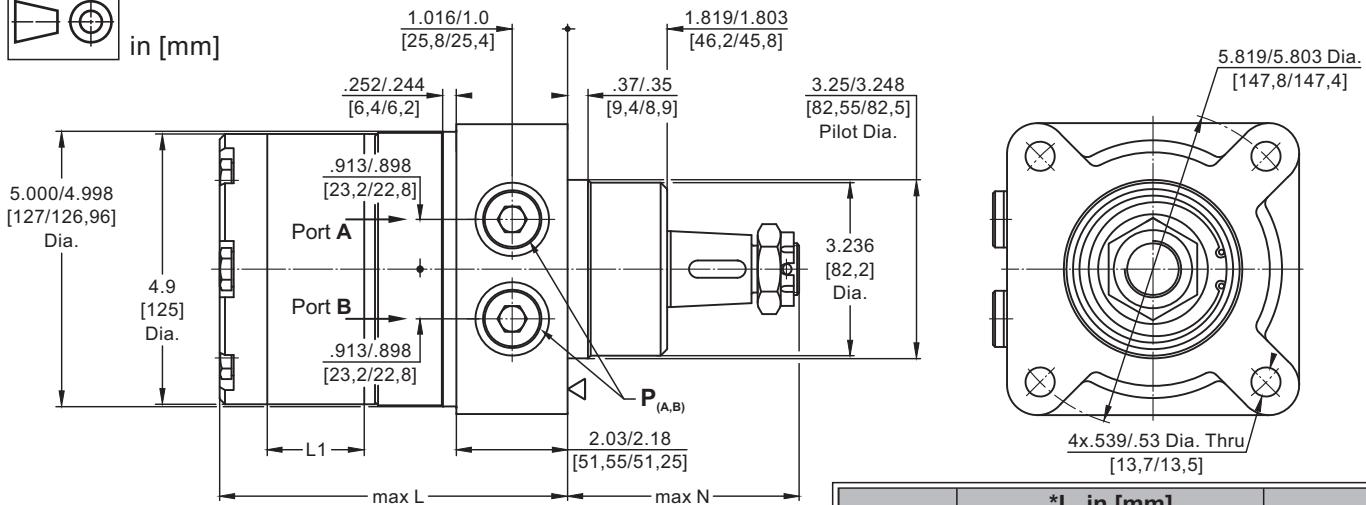

## HW(S)E

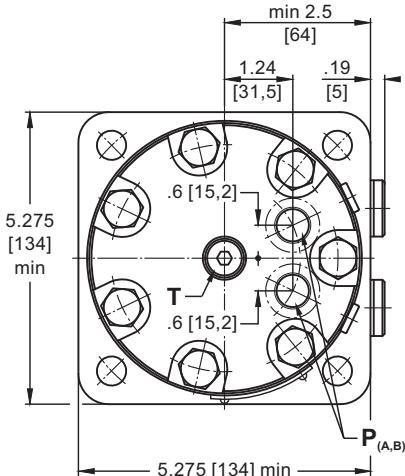

▽ - Motor Mounting Surface

Note: For N see pages 107÷108.

	Versions	
	[5]	[6]
P <sub>(A,B)</sub>	2x $\frac{9}{16}$ -18UNF, O-ring	
T	G $\frac{1}{4}$	$\frac{7}{16}$ -20UNF, O-ring

\* For LSV option the dimension L is .118 in [3 mm] greater.

## Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

## Reverse Rotation

Viewed from Shaft End

Port A Pressurized - CCW




Port B Pressurized - CW

Type	*L, in [mm]		L <sub>1</sub> , in [mm]
	HWE, HWSE	HWFE	
HW... 80	5.47 [139,0]	7.19 [182,5]	.43 [11,0]
HW... 100	5.59 [142,0]	7.30 [185,5]	.55 [14,0]
HW... 125	5.73 [145,5]	7.44 [189,0]	.68 [17,4]
HW... 160	5.91 [150,0]	7.62 [193,5]	.86 [21,8]
HW... 200	6.14 [156,0]	7.85 [199,5]	1.09 [27,8]
HW... 235	6.32 [160,5]	8.03 [204,0]	1.28 [32,5]
HW... 250	6.42 [163,0]	8.13 [206,5]	1.37 [34,8]
HW... 300	6.67 [169,5]	8.39 [213,0]	1.63 [41,4]
HW... 315	6.75 [171,5]	8.46 [215,0]	1.71 [43,5]
HW... 350	6.93 [176,0]	8.64 [219,5]	1.89 [48,0]
HW... 370	7.05 [179,0]	8.76 [222,5]	2.01 [51,0]
HW... 400	7.20 [183,0]	8.92 [226,5]	2.16 [54,8]
HW... 470	7.60 [193,0]	9.31 [236,5]	2.56 [65,0]
HW... 500	7.78 [197,5]	9.49 [241,0]	2.73 [69,4]
HW... 535	7.95 [202,0]	9.67 [245,5]	2.92 [74,1]
HW... 550	8.03 [204,0]	9.74 [247,5]	2.99 [76,0]
HW... 600	8.29 [210,6]	10.00 [254,1]	3.25 [82,6]
HW... 750	9.15 [232,5]	10.85 [275,5]	4.09 [104,0]


## DIMENSIONS and MOUNTING DATA

**F** Magneto mount, six holes

M 5:1

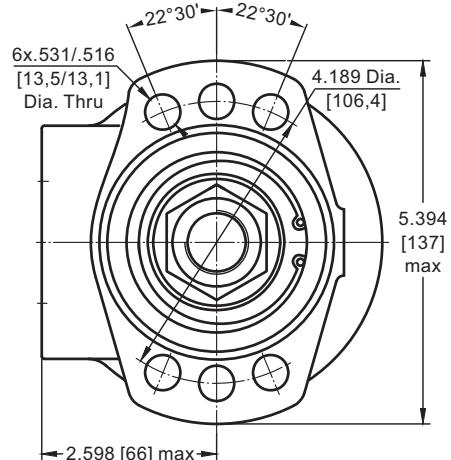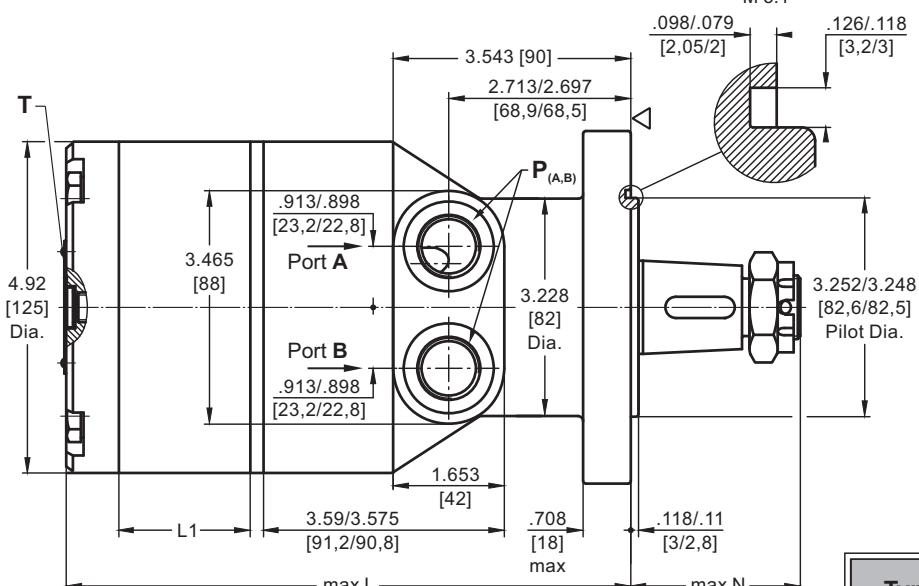

in [mm]

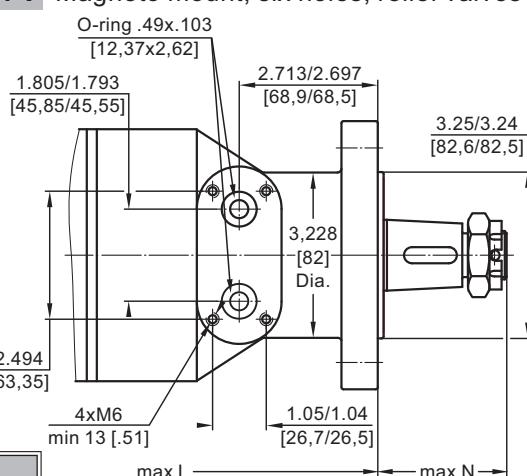**HWFV** Magneto mount, six holes, relief valves**Standard Rotation**

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

**Reverse Rotation**

Viewed from Shaft End


Port A Pressurized - CCW

Port B Pressurized - CW


	Versions	
	2	4
P <sub>(A,B)</sub>	2xG $\frac{1}{2}$	2x7 $\frac{1}{2}$ -14UNF, O-ring
T	G $\frac{1}{4}$	7 $\frac{1}{2}$ -20UNF, O-ring

▽ - Motor Mounting Surface

Note: For N see pages 107-108.

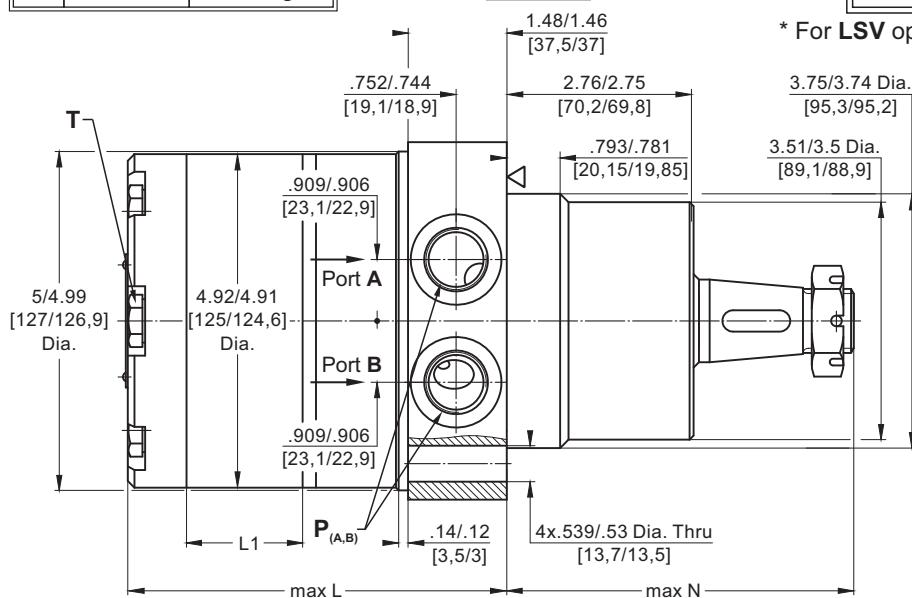
**HWSW** Wheel mount

\* For LSV option the dimension L is .118 in [3 mm] greater.

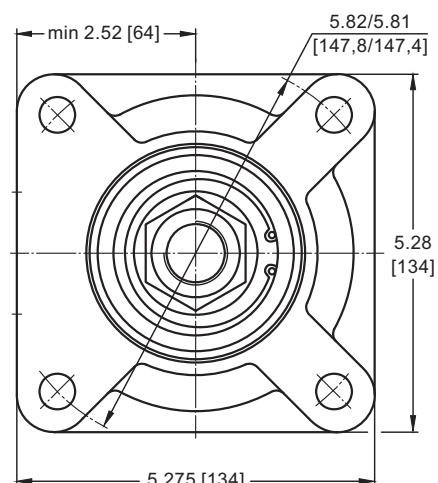


## DIMENSIONS and MOUNTING DATA

## HWSWR Wheel mount, relief valves

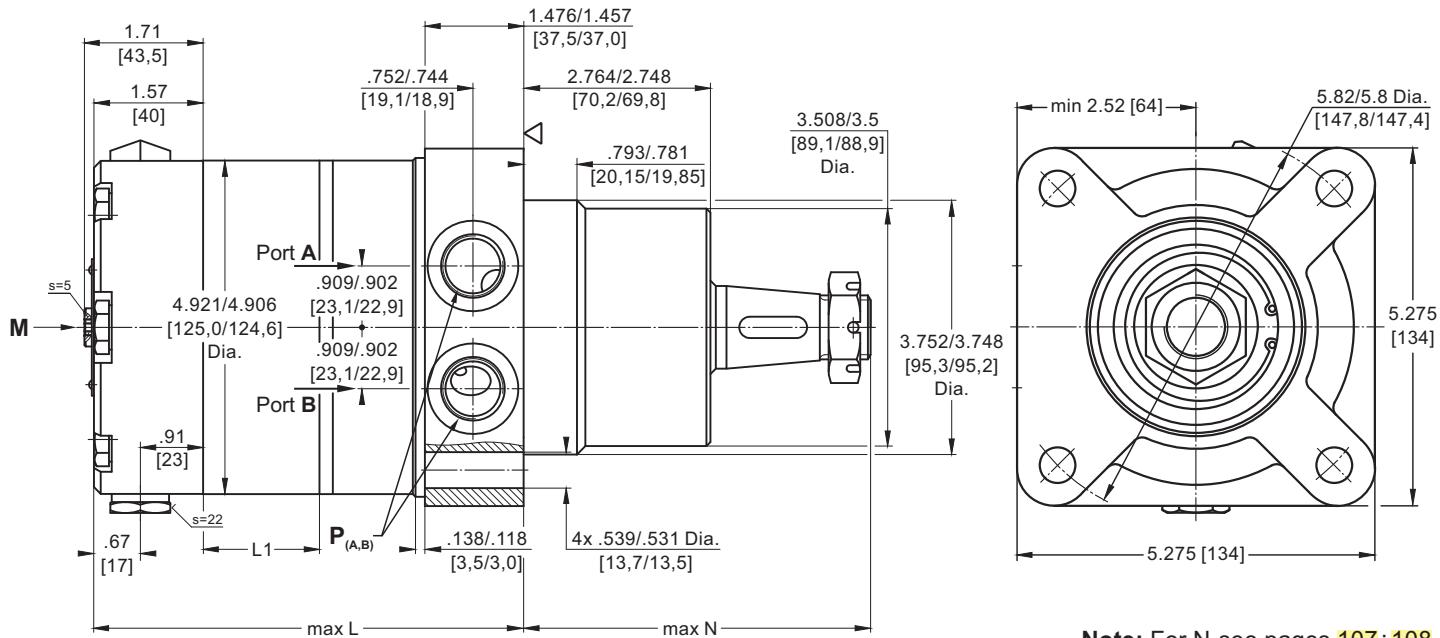

Note: For N see pages 107÷108.

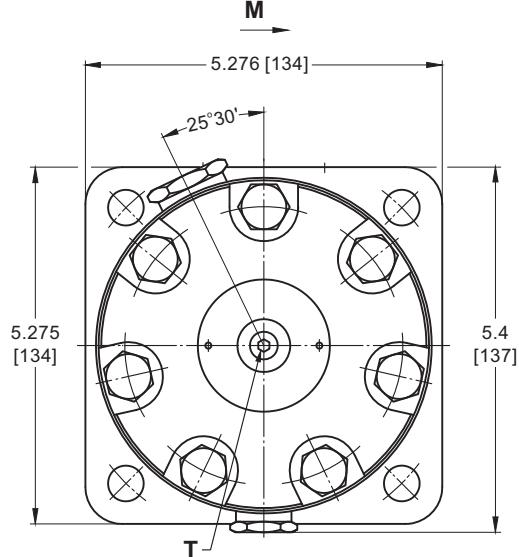

**Pressure Settings at Flow Q=1.32 GPM [5 lpm]  
150 SUS [32 mm<sup>2</sup>/s]; 122°F [50°C]**

- 1 - 1015 PSI [ 70 bar]
- 2 - 1450 PSI [100 bar]
- 3 - 2030 PSI [140 bar]
- 4 - 2470 PSI [170 bar]
- 5 - 3050 PSI [210 bar]

Type	*L, in [mm]	L1, in [mm]
HWSWR 80	5.28 [128,5]	.43 [ 11,0]
HWSWR 100	5.39 [131,5]	.55 [ 14,0]
HWSWR 125	5.51 [135,0]	.68 [ 17,4]
HWSWR 160	5.71 [139,5]	.86 [ 21,8]
HWSWR 200	5.95 [145,0]	1.09 [ 27,8]
HWSWR 235	6.12 [150,0]	1.28 [ 32,5]
HWSWR 250	6.22 [152,5]	1.37 [ 34,8]
HWSWR 300	6.48 [159,0]	1.63 [ 41,4]
HWSWR 315	6.56 [161,0]	1.71 [ 43,5]
HWSWR 350	6.73 [165,5]	1.89 [ 48,0]
HWSWR 370	6.85 [169,0]	2.01 [ 51,0]
HWSWR 400	7.01 [172,5]	2.16 [ 54,8]
HWSWR 470	7.40 [182,5]	2.56 [ 65,0]
HWSWR 500	7.58 [187,0]	2.73 [ 69,4]
HWSWR 535	7.76 [192,0]	2.92 [ 74,1]
HWSWR 550	7.84 [193,5]	2.99 [ 76,0]
HWSWR 600	8.09 [200,0]	3.25 [ 82,6]
HWSWR 750	8.70 [221,0]	4.09 [104,0]

\* For LSV option the dimension L is .118 in [3 mm] greater.

▽ - Motor mounting surface

	Versions	
	2	4
P <sub>(A,B)</sub>	2xG <sup>1</sup> / <sub>2</sub>	2x7 <sup>1</sup> / <sub>8</sub> -14UNF, O-ring
T	G <sup>1</sup> / <sub>8</sub>	G <sup>1</sup> / <sub>8</sub>

**Standard Rotation**

Viewed from Shaft End

Port A Pressurized - **CW**


Port B Pressurized - **CCW**

**Reverse Rotation**

Viewed from Shaft End





Port A Pressurized - **CCW**

Port B Pressurized - **CW**



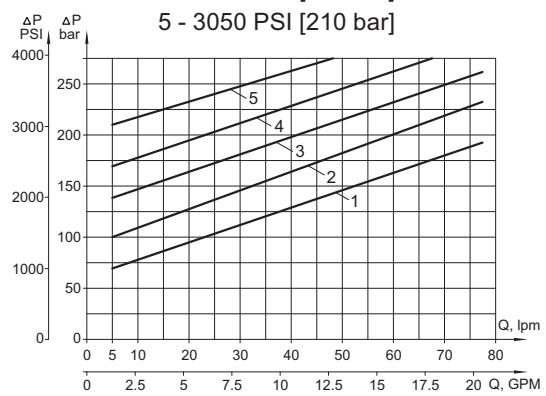


## DIMENSIONS and MOUNTING DATA

## HWSR Wheel mount, relief valves

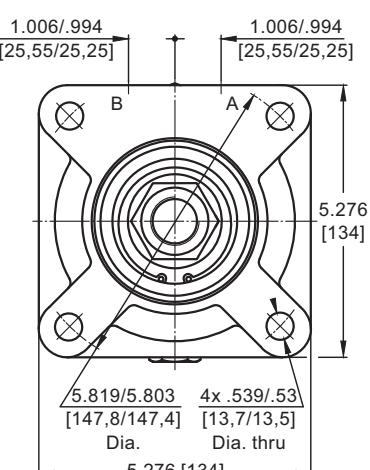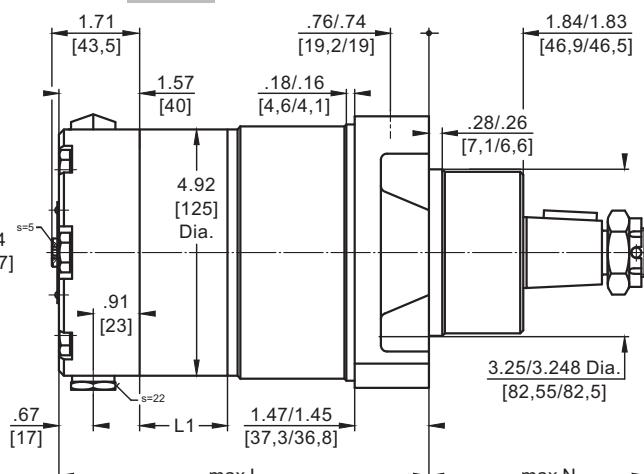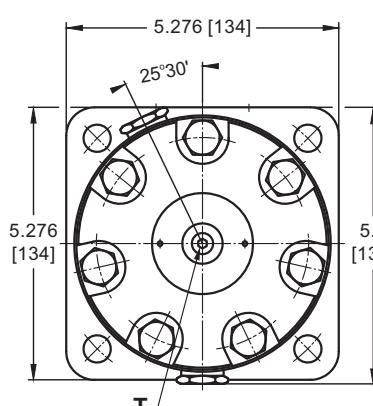

in [mm]

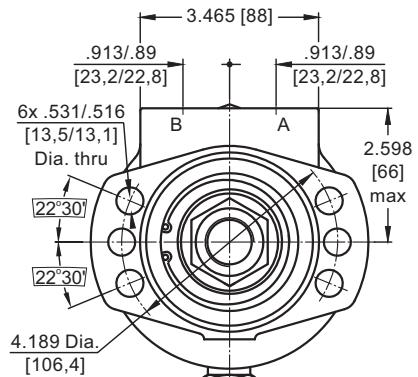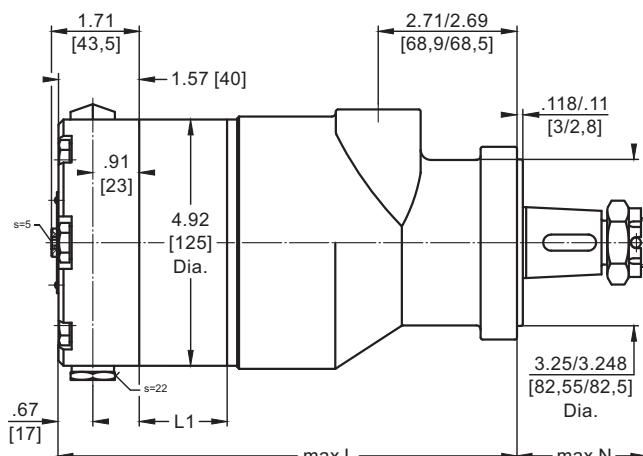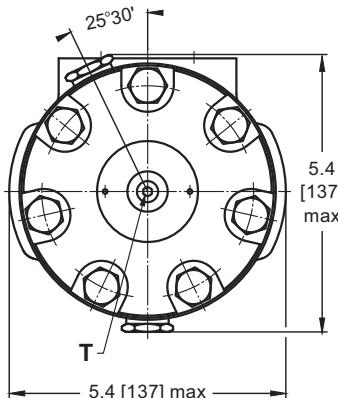

Type	*L, in [mm]		L <sub>1</sub> , in [mm]
	HWSR	HWFR	
HW... 80	5.98 [152,0]	7.69 [195,5]	.43 [ 11,0]
HW... 100	6.10 [155,0]	7.81 [198,5]	.55 [ 14,0]
HW... 125	6.24 [158,5]	7.95 [202,0]	.68 [ 17,4]
HW... 160	6.42 [163,0]	8.13 [206,5]	.86 [ 21,8]
HW... 200	6.65 [169,0]	8.37 [212,5]	1.09 [ 27,8]
HW... 235	6.83 [173,5]	8.54 [217,0]	1.28 [ 32,5]
HW... 250	6.93 [176,0]	8.64 [219,5]	1.37 [ 34,8]
HW... 300	7.19 [182,5]	8.89 [226,0]	1.63 [ 41,4]
HW... 315	7.26 [184,5]	8.98 [228,0]	1.71 [ 43,5]
HW... 350	7.44 [189,0]	9.15 [232,5]	1.89 [ 48,0]
HW... 370	7.56 [192,0]	9.27 [235,5]	2.01 [ 51,0]
HW... 400	7.72 [196,0]	9.43 [239,5]	2.16 [ 54,8]
HW... 470	8.11 [206,0]	9.82 [249,5]	2.56 [ 65,0]
HW... 500	8.29 [210,5]	10.00 [254,0]	2.73 [ 69,4]
HW... 535	8.46 [215,0]	10.19 [258,8]	2.92 [ 74,1]
HW... 550	8.54 [217,0]	10.26 [260,5]	2.99 [ 76,0]
HW... 600	8.92 [226,6]	10.52 [267,1]	3.25 [ 82,6]
HW... 750	9.63 [244,5]	11.34 [288,0]	4.09 [104,0]


	Versions	
	2	4
P <sub>(A,B)</sub>	2xG½	2x7/8-14UNF, O-ring
T	G½	G⅓

▽ - Motor Mounting Surface

Note: For N see pages 107-108.

**Pressure Settings at Flow Q=1.32 GPM [5 lpm]**  
**150 SUS [32 mm<sup>2</sup>/s]; 122°F [50°C]**



- 1 - 1015 PSI [ 70 bar]  
 2 - 1450 PSI [100 bar]  
 3 - 2030 PSI [140 bar]  
 4 - 2470 PSI [170 bar]  
 5 - 3050 PSI [210 bar]

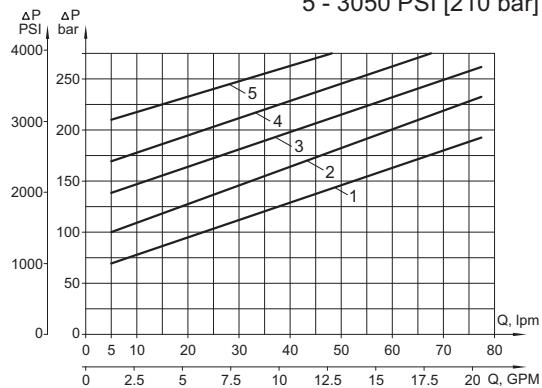

\* For LSV option the dimension L is 3 mm [.118 in] greater.

## DIMENSIONS and MOUNTING DATA

### D Wheel mount

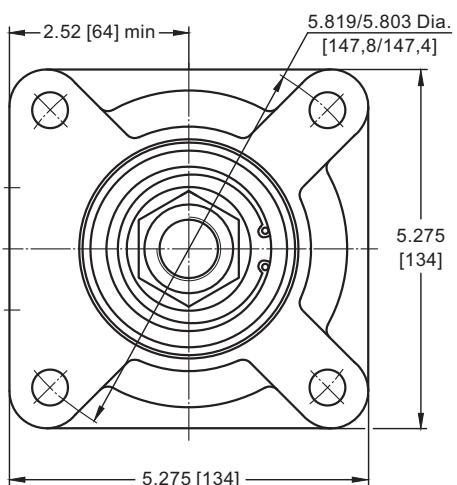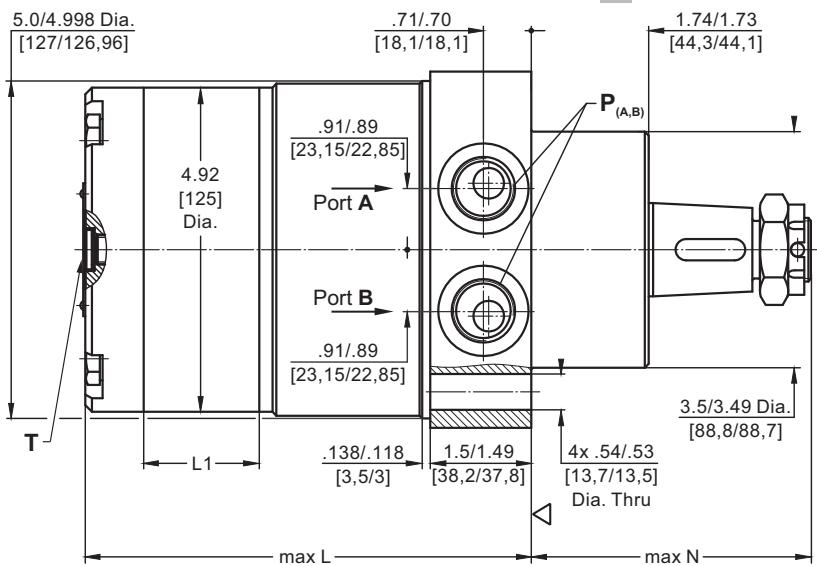

Versions		
	[2]	[4]
P <sub>(A,B)</sub>	2xG½	2x7/8-14UNF, O-ring
T	G¼	7/16-20UNF, O-ring

▽ - Motor Mounting Surface

Note: For N see pages 107-108.



### Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

### Reverse Rotation


Viewed from Shaft End

Port A Pressurized - CCW

Port B Pressurized - CW


Versions		
	[2]	[4]
T	G¼	7/16-20UNF, O-ring

### V Wheel mount, four holes, manifold 4xM6

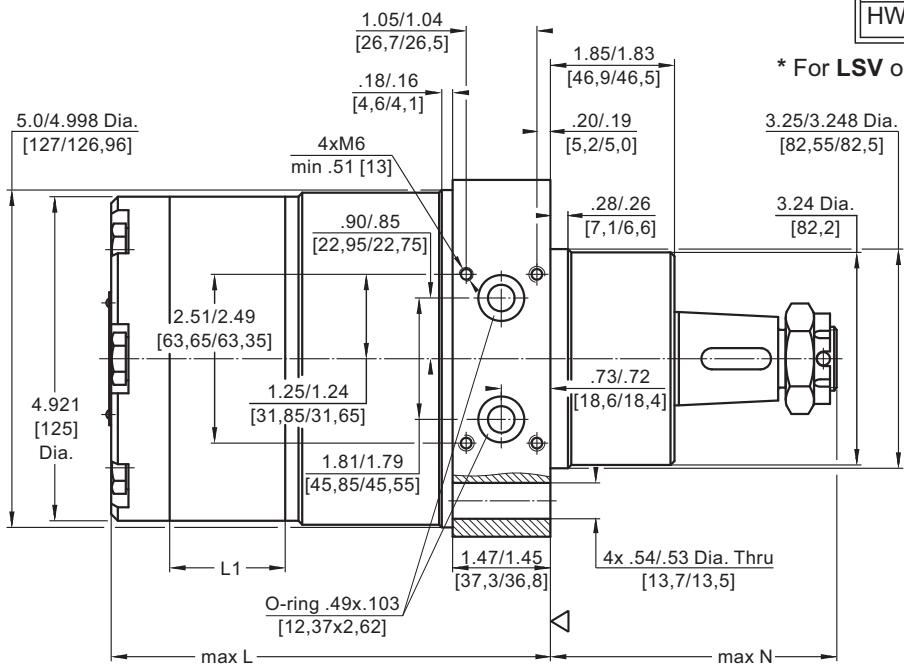


Type	*L, in [mm]		L <sub>1</sub> , in [mm]
	HWD	HWV	
HW... 80	5.35 [136,0]	5.28 [134,0]	.43 [ 11,0]
HW... 100	5.47 [139,0]	5.39 [137,0]	.55 [ 14,0]
HW... 125	5.61 [142,5]	5.53 [140,5]	.68 [ 17,4]
HW... 160	5.79 [147,0]	5.71 [145,0]	.86 [ 21,8]
HW... 200	6.02 [153,0]	5.94 [151,0]	1.09 [ 27,8]
HW... 235	6.22 [158,0]	6.12 [155,5]	1.28 [ 32,5]
HW... 250	6.30 [160,0]	6.22 [158,0]	1.37 [ 34,8]
HW... 300	6.56 [166,5]	6.46 [164,5]	1.63 [ 41,4]
HW... 315	6.65 [169,0]	6.56 [166,5]	1.71 [ 43,5]
HW... 350	6.83 [173,5]	6.73 [171,0]	1.89 [ 48,0]
HW... 370	6.95 [176,5]	6.85 [174,0]	2.01 [ 51,0]
HW... 400	7.09 [180,0]	7.01 [178,0]	2.16 [ 54,8]
HW... 470	7.50 [190,5]	7.40 [188,0]	2.56 [ 65,0]
HW... 500	7.66 [194,5]	7.58 [192,5]	2.73 [ 69,4]
HW... 535	7.85 [199,5]	7.76 [197,0]	2.92 [ 74,1]
HW... 550	7.93 [201,5]	7.83 [199,0]	2.99 [ 76,0]
HW... 600	8.15 [207,1]	8.11 [206,0]	3.25 [ 82,6]
HW... 750	9.02 [229,0]	8.96 [227,5]	4.09 [104,0]



\* For LSV option the dimension L is .118 in [3 mm] greater.

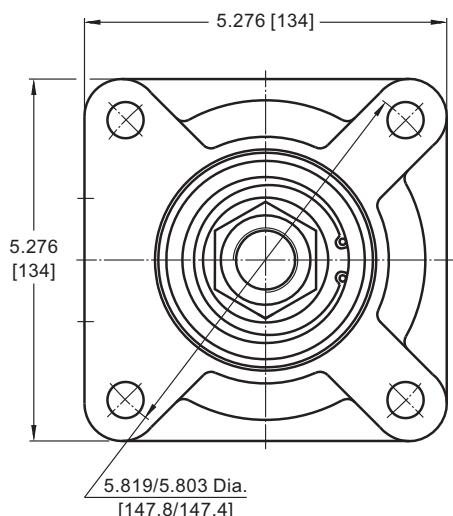




## DIMENSIONS and MOUNTING DATA

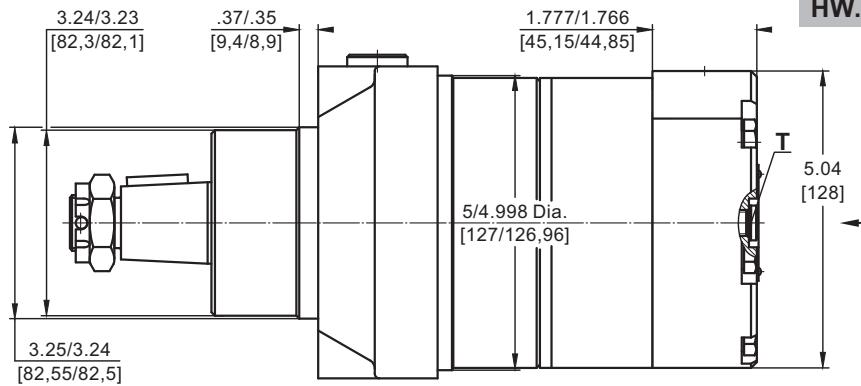



HW...7

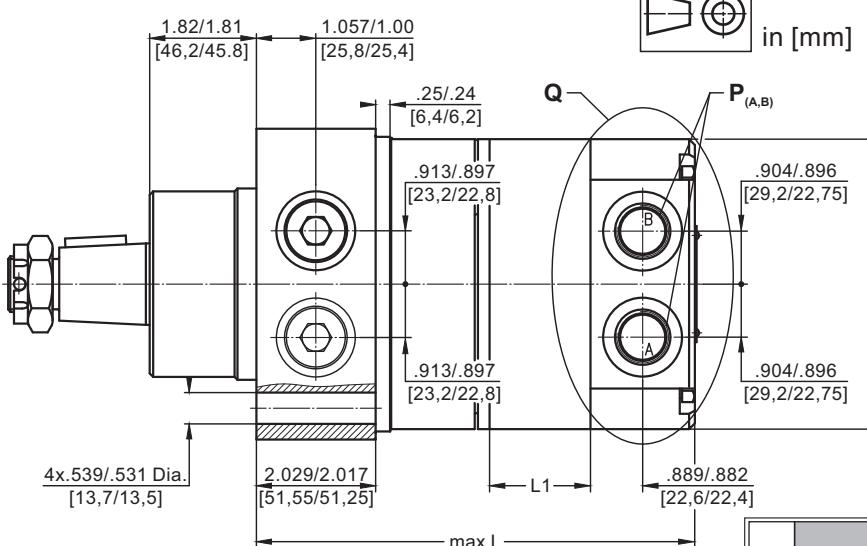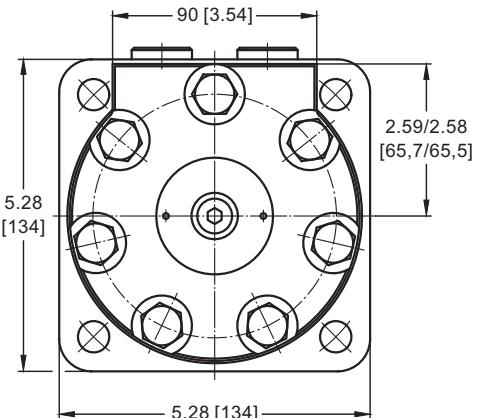

HWF...7,8,9,10

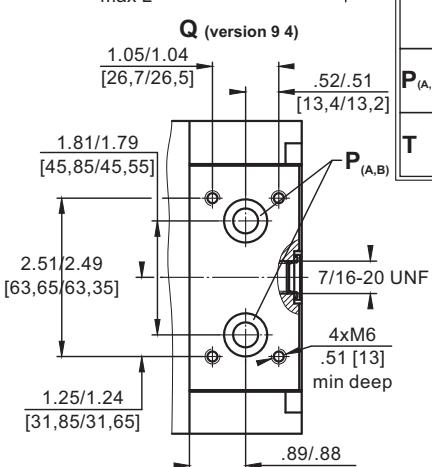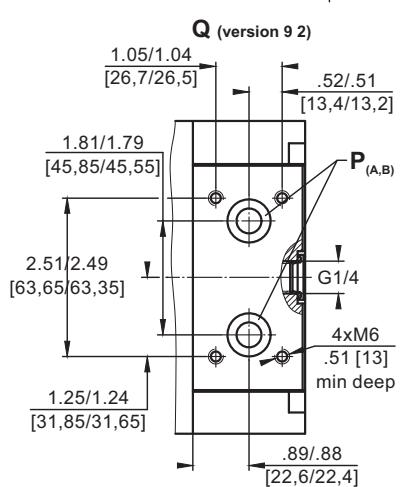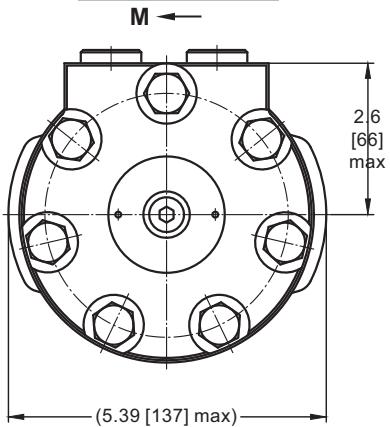





	Versions					
	7	8	9.2	9.4	10.2	10.4
P <sub>(A,B)</sub>	2xG <sub>1/2</sub>	2x7/8-14UNF, O-ring		2xø9 O-ring 12,37x2,62 [.49x.103]	2xM16x1,5 O-ring 18x2 [.709x.787]	
T	G <sub>1/4</sub>		7/16-20UNF, O-ring	G <sub>1/4</sub>	7/16-20UNF, O-ring	G <sub>1/4</sub>

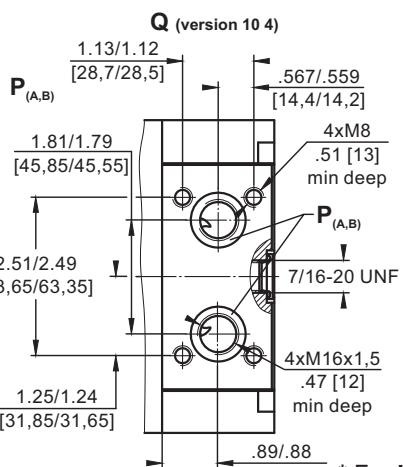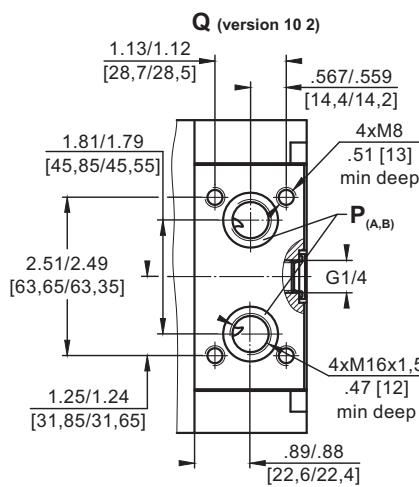

Type	*L, in [mm]		L <sub>1</sub> , in [mm]
	HW(S)...7,8,9,10	HWF...7,8,9,10	
HW...80	6.20 [157,5]	7.89 [200,5]	.43 [11,0]
HW...100	6.32 [160,5]	8.01 [203,5]	.55 [14,0]
HW...125	6.46 [164,0]	8.15 [207,0]	.68 [17,4]
HW...160	6.61 [168,0]	8.31 [211,0]	.86 [21,8]
HW...200	6.85 [174,0]	8.54 [217,0]	1.09 [27,8]
HW...235	7.05 [179,0]	8.74 [222,0]	1.28 [32,5]
HW...250	7.13 [181,0]	8.82 [224,0]	1.37 [34,8]
HW...300	7.38 [187,5]	9.07 [230,5]	1.63 [41,4]
HW...315	7.48 [190,0]	9.17 [233,0]	1.71 [43,5]
HW...350	7.66 [194,5]	9.35 [237,5]	1.89 [48,0]
HW...370	7.78 [197,5]	9.47 [240,5]	2.01 [51,0]
HW...400	7.91 [201,0]	9.61 [244,0]	2.16 [54,8]
HW...470	8.33 [211,5]	10.02 [254,5]	2.56 [65,0]
HW...500	8.50 [216,0]	10.20 [259,0]	2.73 [69,4]
HW...535	8.68 [220,5]	10.37 [263,5]	2.92 [74,1]
HW...550	8.76 [222,5]	10.45 [265,5]	2.99 [76,0]
HW...600	9.02 [229,0]	10.71 [272,0]	3.25 [82,6]
HW...750	9.86 [250,5]	11.56 [293,5]	4.09 [104]

\* For LSV option the dimension L is .118 in [3 mm] greater.

## PERMISSIBLE SHAFT LOADS

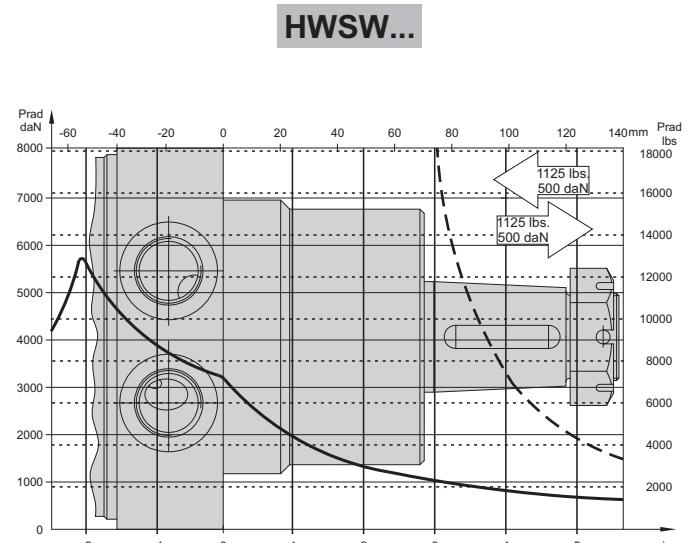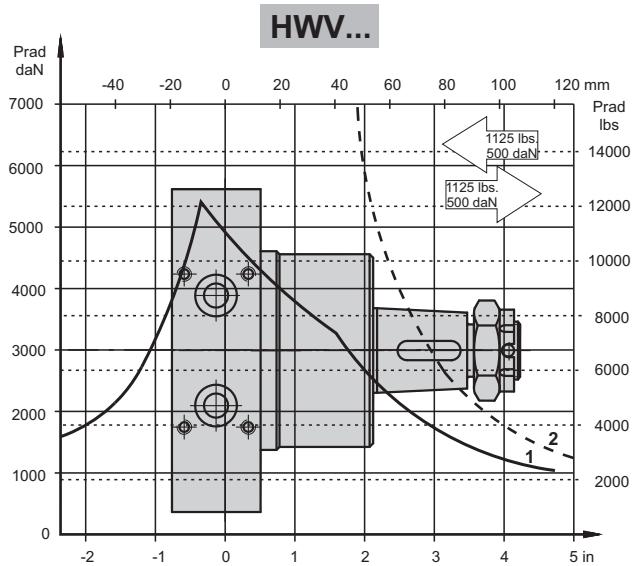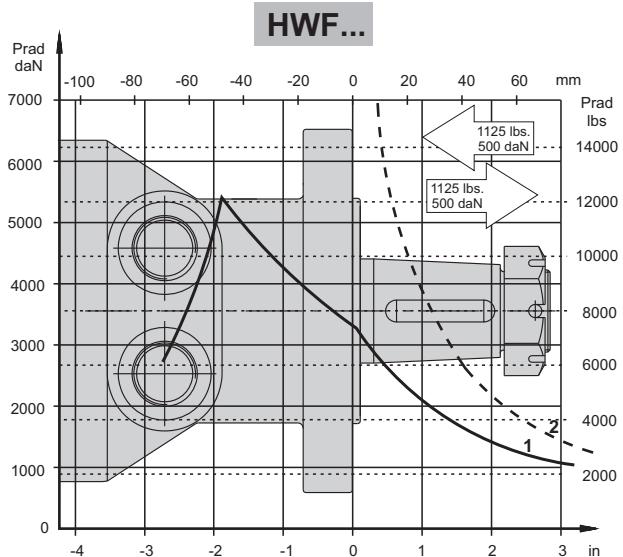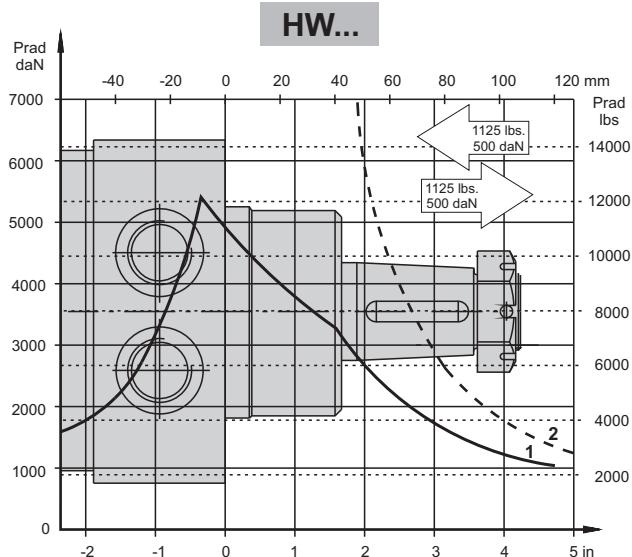


1 - Bearing curve: The curve applies to a B10 bearing life of 2000 hours at 100 RPM.


2 - Shaft curve: The curve represents Max. permissible radial shaft load with safety factor 3:1.

## MAX. PERMISSIBLE SHAFT SEAL PRESSURE

HW, HWF, HWS, HWD,  
HWV, HWSW,  
HW(S)(F)...7,8,9,10




HWFR, HWSR, HWSWR

**HW...U motors with drain connection:**

The shaft seal pressure equals the pressure in the drain line.


- 1 - high pressure "U" version
- 2 - standard version
- 3 - shaft "C" version

- continuous operations
- - - - - intermittent operations

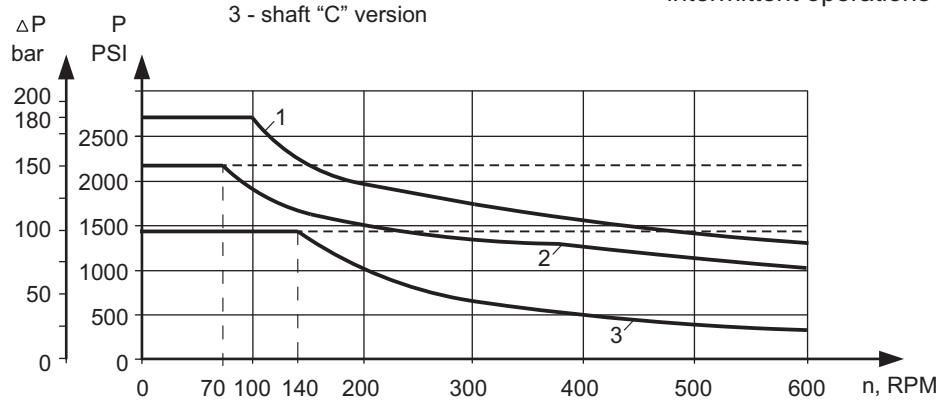


## SHAFT EXTENSIONS

**C** - 1½" [38,1] straight, Parallel key  $\frac{3}{8}'' \times \frac{3}{8}'' \times 1\frac{1}{2}''$  BS46  
Max. Torque 10630 lb-in [120 daNm]

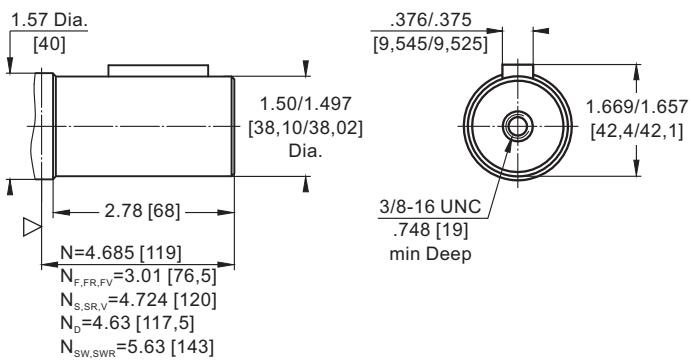


**CO** - ø25, straight, Parallel key A8x7x32 DIN 6885  
Max. Torque 3540 lb-in [40 daNm]

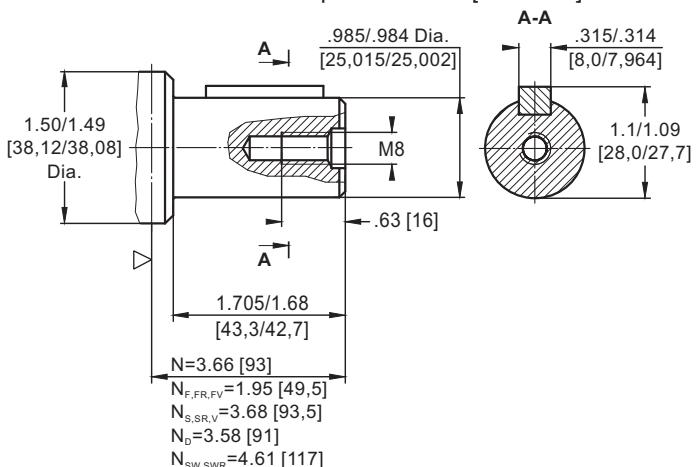


in [mm]

▽ - Motor Mounting Surface


**K** - 1¼" [31,75] straight, Parallel key  $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{2}''$  BS46  
Max. Torque 6815 lb-in [77 daNm]

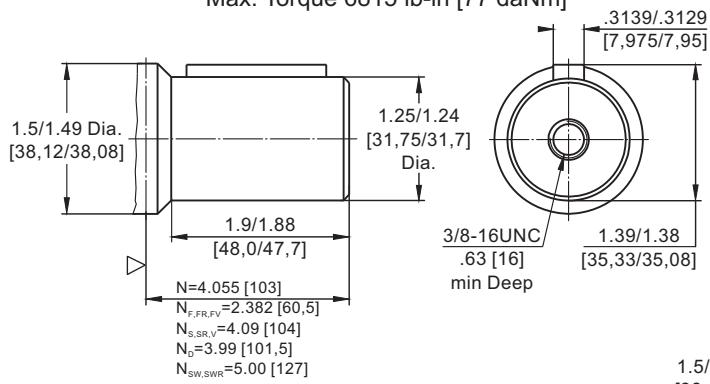


**M** - ø32 straight, Parallel key A10x8x32 DIN 6885  
Max. Torque 6815 lb-in [77 daNm]

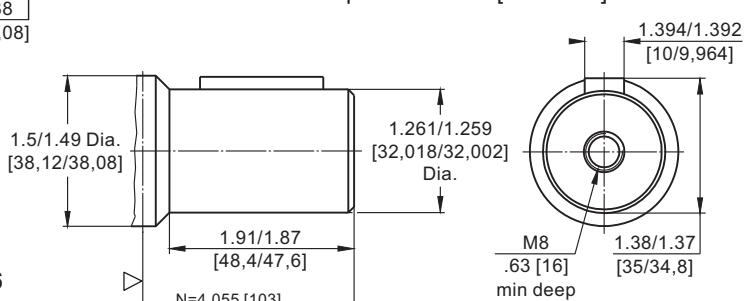

**H** - 1 $\frac{3}{8}$ " [35] straight, Parallel key  $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{2}''$  BS46  
Max. Torque 7965 lb-in [90 daNm]

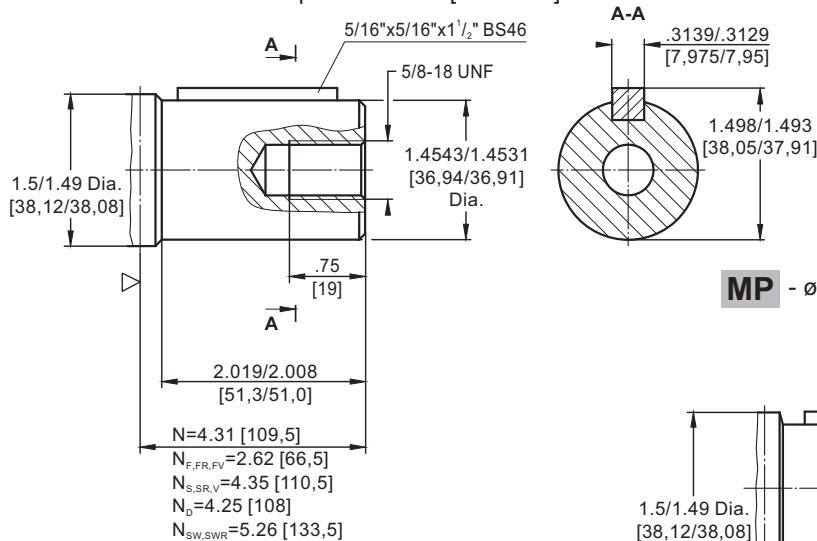

**MP** - ø32 straight, Parallel key A10x8x45 DIN 6885  
Max. Torque 7520 lb-in [85 daNm]

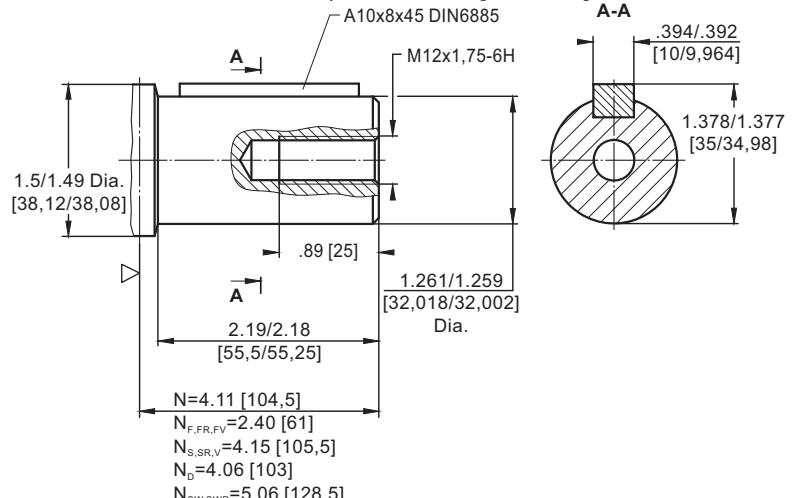

N - for standard flange

N<sub>F</sub> - for F flange

N<sub>FR</sub> - for FR flange

N<sub>FV</sub> - for FV flange

N<sub>S</sub> - for S flange

N<sub>SR</sub> - for SR flange


N<sub>D</sub> - for D flange

N<sub>V</sub> - for V flange

N<sub>SW</sub> - for SW flange

N<sub>SWR</sub> - for SWR flange



## SHAFT EXTENSIONS [continued]



in [mm]

▽ - Motor Mounting Surface


**T** - 1½" [38,1] tapered 1:8, Parallel key 5/16" x 5/16" x 1¼" BS46  
Max. Torque 10620 lb-in [120 daNm]

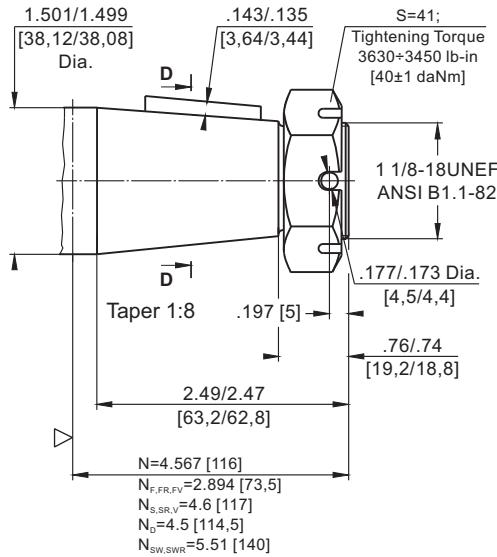


D-D

.312/.310 [7,92/7,884]


**SH** - ø1" splined BS 2059, SAE 6B  
Max. Torque 3540 lb-in [40 daNm]

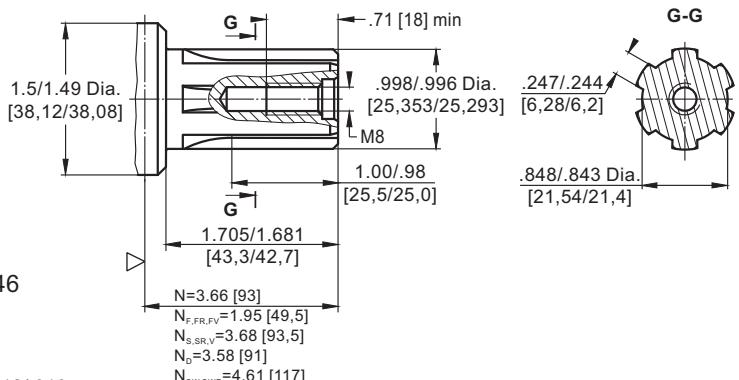

**L** - ø1¼" [31,75] splined 14T, DP12/24 ANSI B92.1-1976  
Max. Torque 8410 lb-in [95 daNm]

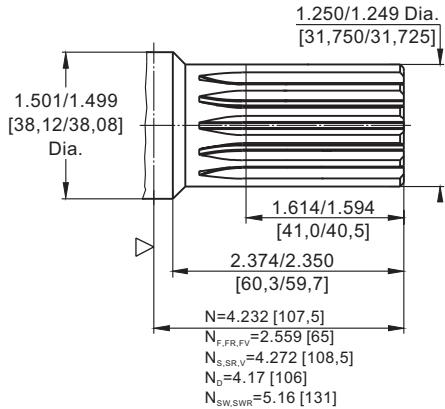

**KB** - ø35 tapered 1:10, Parallel key 5/16" x 5/16" x 1¼" BS46  
Max. Torque 8410 lb-in [95 daNm]

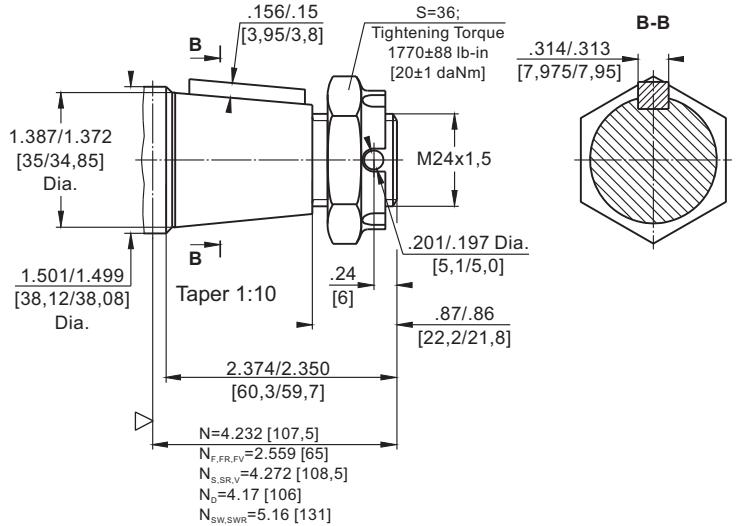

N - for standard flange

N<sub>F</sub> - for F flange

N<sub>FR</sub> - for FR flange

N<sub>FV</sub> - for FV flange

N<sub>S</sub> - for S flange

N<sub>SR</sub> - for SR flange


N<sub>D</sub> - for D flange

N<sub>V</sub> - for V flange

N<sub>SW</sub> - for SW flange

N<sub>SWR</sub> - for SWR flange

**R** - 1¼" [31,75] tapered 1:8, Parallel key 5/16" x 5/16" x 1" BS46  
Max. Torque 8410 lb-in [95 daNm]

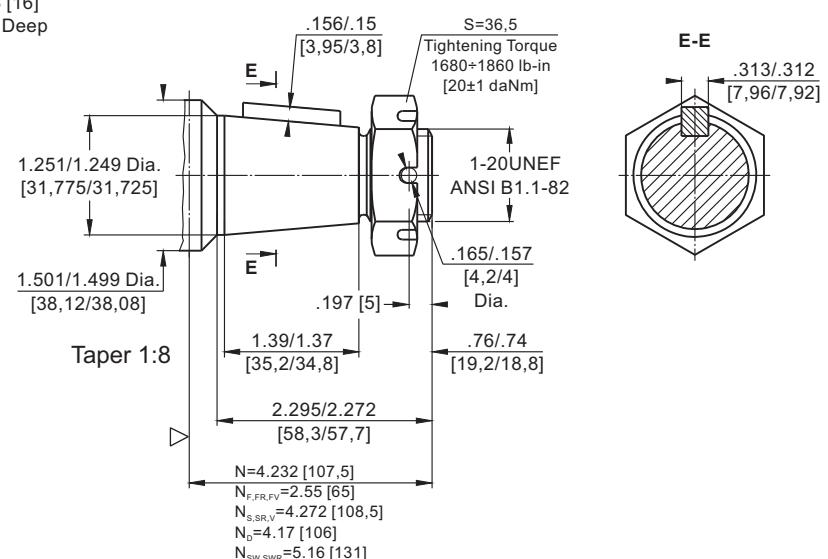

## ORDER CODE

	1	2	3	4	5	6	7	8	9
<b>HW</b>							/		

**Pos.1 - Mounting Flange**

- omit - Wheel mount, four holes  
**E** - Wheel mount, four holes, rear ports  
**F** - Magneto mount, six holes  
**FR** - Magneto mount, six holes, relief valves  
**FV<sup>1)\*</sup>** - Magneto mount, six holes, manifold 4xM6  
**FE** - Magneto mount, six holes, rear ports  
**S** - Wheel mount, four holes  
**SR** - Wheel mount, four holes, relief valves  
**SW** - Wheel mount, four holes;  
mounting on ø95,3 [3.75]  
**SWR** - Wheel mount, four holes;  
mounting on ø95,3 [3.75], relief valves  
**SE** - Wheel mount, four holes, rear ports  
**D** - Wheel mount, four holes;  
mounting on ø88,8 [3.5]  
**V<sup>1)\*</sup>** - Wheel mount, four holes, manifold 4xM6

**Pos.2 - Displacement code**

- 80** - 4.86 in<sup>3</sup>/rev [ 79,7 cm<sup>3</sup>/rev]  
**100** - 6.19 in<sup>3</sup>/rev [101,4 cm<sup>3</sup>/rev]  
**125** - 7.69 in<sup>3</sup>/rev [126,0 cm<sup>3</sup>/rev]  
**160** - 9.63 in<sup>3</sup>/rev [157,8 cm<sup>3</sup>/rev]  
**200** - 12.28 in<sup>3</sup>/rev [201,3 cm<sup>3</sup>/rev]  
**235** - 14.36 in<sup>3</sup>/rev [235,3 cm<sup>3</sup>/rev]  
**250** - 15.38 in<sup>3</sup>/rev [252,0 cm<sup>3</sup>/rev]  
**300** - 18.31 in<sup>3</sup>/rev [300,0 cm<sup>3</sup>/rev]  
**315** - 19.22 in<sup>3</sup>/rev [314,9 cm<sup>3</sup>/rev]  
**350** - 21.22 in<sup>3</sup>/rev [347,8 cm<sup>3</sup>/rev]  
**370** - 22.52 in<sup>3</sup>/rev [369,0 cm<sup>3</sup>/rev]  
**400** - 24.21 in<sup>3</sup>/rev [396,8 cm<sup>3</sup>/rev]  
**470** - 28.72 in<sup>3</sup>/rev [470,6 cm<sup>3</sup>/rev]  
**500** - 30.66 in<sup>3</sup>/rev [502,4 cm<sup>3</sup>/rev]  
**535** - 32.65 in<sup>3</sup>/rev [535,0 cm<sup>3</sup>/rev]  
**550** - 33.56 in<sup>3</sup>/rev [550,0 cm<sup>3</sup>/rev]  
**600** - 36.55 in<sup>3</sup>/rev [598,9 cm<sup>3</sup>/rev]  
**750** - 45.99 in<sup>3</sup>/rev [753,8 cm<sup>3</sup>/rev]

**Pos.3 - Shaft Extensions<sup>2)\*</sup>**

- |           |  |
|-----------|--|
| <b>K</b>  | - 1 1/4" [ø31,75] straight, Parallel key 5/16"x5/16"x1 1/2" BS46   |
| <b>KB</b> | - ø35 tapered 1:10, Parallel key 5/16"x5/16"x1 1/4" BS46           |
| <b>L</b>  | - 1 1/4" [ø31,75] splined 14T, DP12/24 ANSI B92.1-1976             |
| <b>M</b>  | - ø32 straight, Parallel key A10x8x32 DIN 6885                     |
| <b>MP</b> | - ø32 straight, Parallel key A10x8x45 DIN 6885                     |
| <b>R</b>  | - 1 1/4" [ø31,75] tapered 1:8, Parallel key 5/16"x5/16"x1" BS46    |
| <b>T</b>  | - 1 1/2" [ø38,1] tapered 1:8, Parallel key 5/16"x5/16"x1 1/4" BS46 |
| <b>C</b>  | - 1 1/2" [ø38,1] straight, Parallel key 3/8"x3/8"x1 1/2" BS46      |
| <b>CO</b> | - ø25, straight, Parallel key A8x7x32 DIN 6885                     |
| <b>H</b>  | - 1 3/8" [ø35] straight, Parallel key 5/16"x5/16"x1 1/2" BS46      |
| <b>SH</b> | - 1" [ø25,32] splined BS 2059, SAE 6B                              |

**Pos.4 - Ports**

- |                         |   |
|-------------------------|---|
| <b>2</b>                | - side ports, 2xG1/2, G1/4, BSP thread, ISO 228         |
| <b>4</b>                | - side ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF         |
| <b>5<sup>3)*</sup></b>  | - rear ports, 2xG3/8, G1/4, BSP thread, ISO 228         |
| <b>6<sup>3)*</sup></b>  | - rear ports, 2x9/16-18 UNF, O-ring, 7/16-20 UNF        |
| <b>7<sup>8)*</sup></b>  | - side ports, 2xG1/2 thread in the cover                |
| <b>8<sup>8)*</sup></b>  | - side ports, 2x7/8-14 UNF, O-ring thread in the cover  |
| <b>9<sup>8)*</sup></b>  | - side ports, for valve mounting in the cover           |
| <b>10<sup>8)*</sup></b> | - side ports, for valve mounting and 2xM16 in the cover |

**Pos.5 - Drain line**

- omit - For versions 2,4,5,6,7 and 8
- |          |                             |
|----------|-----------------------------|
| <b>2</b> | - G1/4, BSP thread, ISO 228 |
| <b>4</b> | - 7/16-20 UNF               |

**Pos.6 - Shaft Seal Version**

- omit - Standard shaft seal up to 150 bar [2175 PSI]  
**U** - High pressure shaft seal up to 180 bar [2610 PSI]

**Pos.7 - Special Features<sup>4)\* 5)\* 6)\*</sup> [see page 110]**

- |          |                          |
|----------|--------------------------|
| <b>I</b> | - 70, 100, 140, 170, 210 |
|----------|--------------------------|

**Pos.8 - Valves Pressure Range, bar<sup>7)\*</sup>**

- |          |                          |
|----------|--------------------------|
| <b>I</b> | - 70, 100, 140, 170, 210 |
|----------|--------------------------|

**Pos.9 - Design Series**

- omit - Factory specified

**NOTES:**

- <sup>1)\*</sup> Flanges **V** and **FV** is for versions 2 and 4 - drainage only!
- <sup>2)\*</sup> The permissible output torque for shafts must not be exceeded!
- <sup>3)\*</sup> For **5** and **6**-versions only /rear ports/!
- <sup>4)\*</sup> If the code on pos.7 is not specified in the order, it will be considered as LL-option.
- <sup>5)\*</sup> Colour at customer's request.
- <sup>6)\*</sup> Non painted feeding surfaces, colour at customer's request.
- <sup>7)\*</sup> For **SR** and **FR** only!
- <sup>8)\*</sup> Port versions 7,8,9 and 10 are available with HW(S)(F) flanges only!

**Rear port**-versions [**5** and **6**] are not available with **SR** and **FR!!!**

The hydraulic motors are mangano-phosphatized as standard.

# MOTOR SPECIAL FEATURES

---

Special Feature Description	Order Code	Motor type											
		MLHM	MLHP	MLHPW, MLHP(W)N	HP	MLHR	MLHRN	HR	MLHPL	MLHRL	MLHRW	MLHH	HW
Speed Sensor*	RS	O	O	-	O	O	-	O	-	-	-	O	O****
Low Leakage	LL	O	-	-	-	O	O	O	-	O	O	O	O
Low Speed Valving	LSV	-	-	-	-	O	-	-	-	-	-	O	O
Free Running	FR	O	O	O	O	O	O	O	O	O	O	O	O
Reverse Rotation	R	O	O	O	O	O	O	O	O	O	O	O	O
Paint**	P	O	O	O	O	O	O	O	O	O	O	O	O
Corrosion Protected Paint**	PC	O	O	O	O	O	O	O	O	O	O	O	O
Special Paint***	PS	O	O	O	O	O	O	O	O	O	O	O	O
	PCS												
Check Valves		S	S****	S	O	S****	S	O	S	S	S****	S****	S

O	Optional
-	Not applicable
S	Standard

\* For sensor ordering see pages 111-112.

\*\* Colour at customer's request.

\*\*\* Non painted feeding surfaces, colour at customer's request.


\*\*\*\* Without check valves for "U" shaft seal versions.

\*\*\*\*\* RS option is not available at HW...R (with relief valves).


# MOTORS WITH SPEED SENSOR

---

**MLHM...RS**

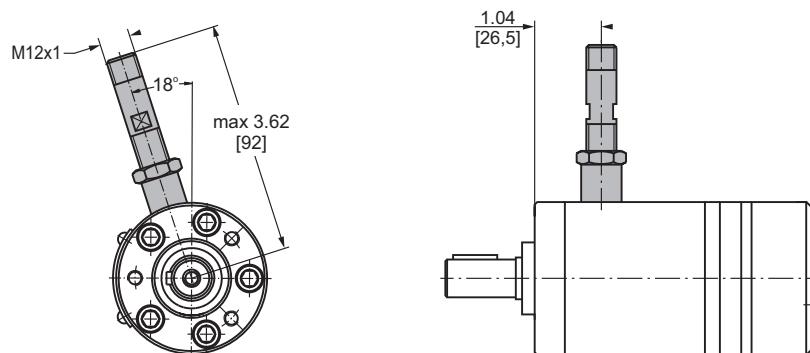


**MLHP...RS**  
**MLHR...RS**


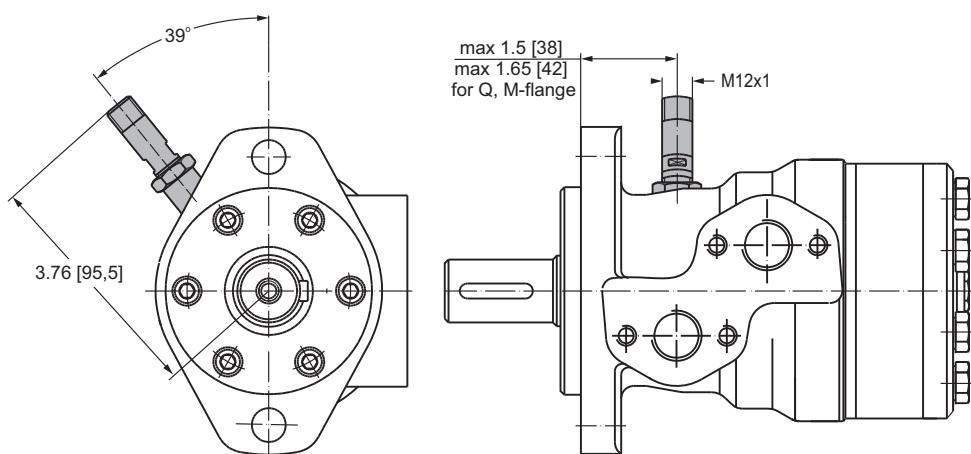


**HP...RS**  
**HR...RS**

For Q-flange

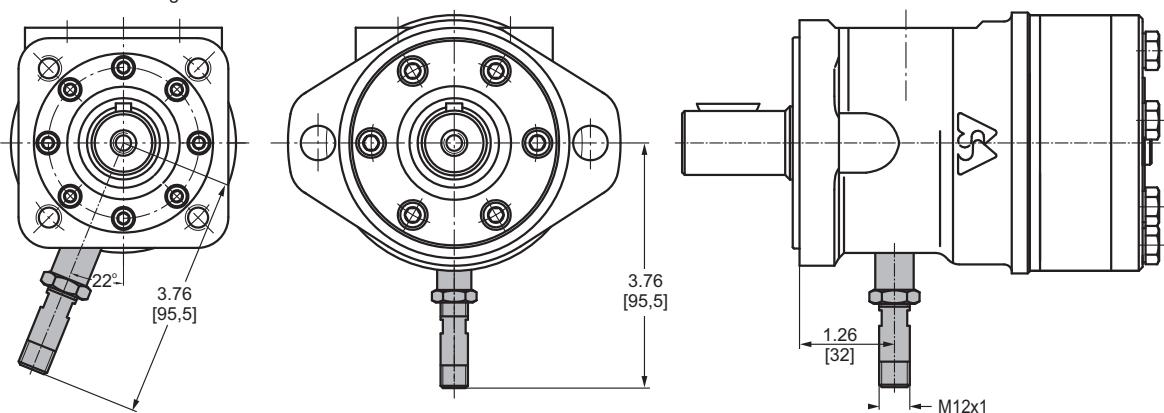



**MLHH...RS**

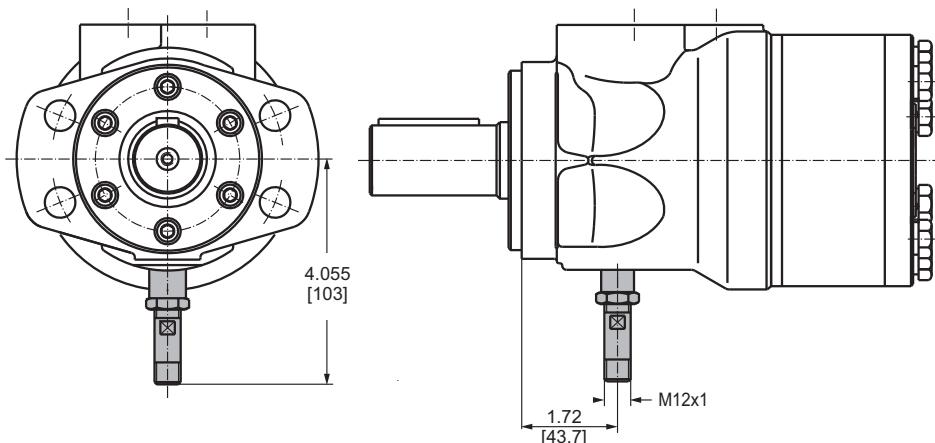


in [mm]

**SPEED  
SENSOR**  
**MOTORS**


**HW...RS**

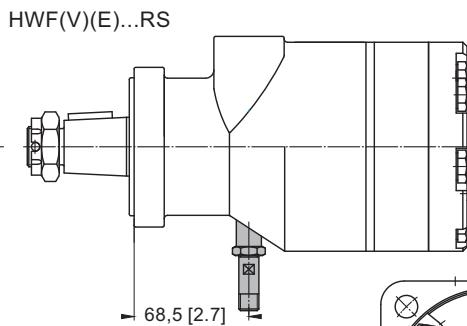


RS option is not available at HW...R (with relief valves).



in [mm]



**HW(S)(D)(SW)(V)(E)...RS**

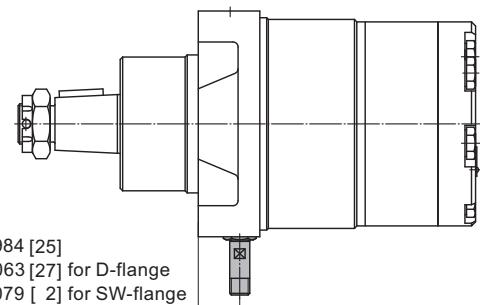


**TECHNICAL DATA of the SPEED SENSOR**

**Technical data**

<b>Frequency range</b>	0...15 000 Hz
<b>Output</b>	Universal PUSH PULL
<b>Power supply</b>	10-30 VDC
<b>Current input</b>	<20 mA (@24 VDC)
<b>Maximum output current</b>	500 mA
<b>Ambient Temperature</b>	-40...+125°C [-40...+257°F]
<b>Protection</b>	IP 67
<b>Plug connector</b>	M12-Series
<b>Mounting principle</b>	ISO 6149

**Output signal**

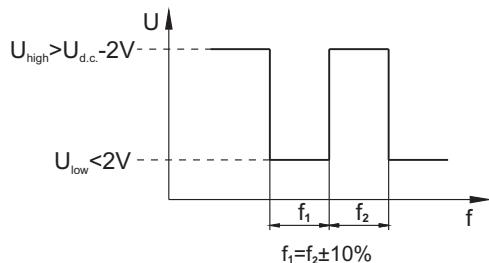


$$\text{Load max.: } I_{\text{high}} = I_{\text{low}} < 50 \text{ mA}$$


Motor type	MLHM	MLHP	MLHR	HP, HR	MLHH	HW
Pulses per revolution	30	36	36	36	42	12

**Wiring diagrams**

**PNP**

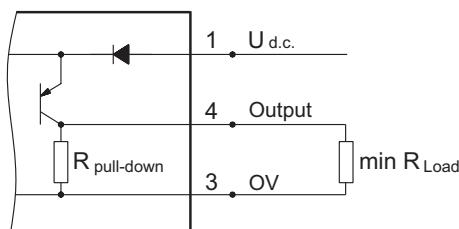


**NPN**

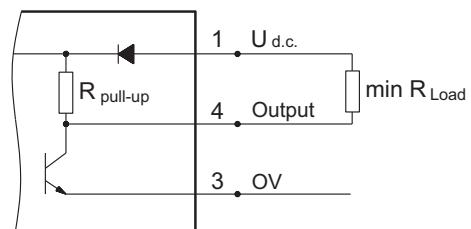

$$R_{\text{Load}} [\text{k}\Omega] = U_{\text{d.c.}} [\text{V}] / I_{\text{max}} [\text{mA}]$$

**Stick type**



Terminal No.	Connection	Cable Output
1	U <sub>d.c.</sub>	Brown
2	No connection	White
3	0V	Blue
4	Output signal	Black

**Order Code for Speed Sensor**

Sensor Code	Electric connection
<b>RS</b>	Connector BINDER 713 series
<b>RSL2,5</b>	Cable output 3x0,25; 98 in [2,5 m] long
<b>RSL3,5</b>	Cable output 3x0,25; 138 in [3,5 m] long
<b>RSL5</b>	Cable output 3x0,25; 196 in [5 m] long
<b>RSL10</b>	Cable output 3x0,25; 394 in [10 m] long

**NOTE:** \* - The speed sensor is not fitted at the factory, but is supplied in a plastic bag with the motor.  
For installation see enclosed instructions.

# APPLICATION CALCULATION

## VEHICLE DRIVE CALCULATIONS

### 1. Motor speed: n, RPM

$$n = \frac{168 \times v_{ml} \times i}{R_{in}} \quad n = \frac{2,65 \times v_{km} \times i}{R_m}$$

$v_{km}$  - vehicle speed, km/h;

$v_{ml}$  - vehicle speed, mile/h;

$R_m$  - wheel rolling radius, m;

$R_{in}$  - wheel rolling radius, in;

i - gear ratio between motor and wheels.

If no gearbox, use  $i=1$ .

### 2. Rolling resistance: RR, lbs [daN]

The resistance force resulted in wheels contact with different surfaces:

$$RR = G \times \rho$$

G - total weight loaded on vehicle, lbs [daN];  
 $\rho$  - rolling resistance coefficient (Table 1).

Table 1

Rolling resistance coefficient In case of rubber tire rolling on different surfaces	
Surface	$\rho$
Concrete- faultless	0.010
Concrete- good	0.015
Concrete- bad	0.020
Asphalt- faultless	0.012
Asphalt- good	0.017
Asphalt- bad	0.022
Macadam- faultless	0.015
Macadam- good	0.022
Macadam- bad	0.037
Snow- 5 cm	0.025
Snow- 10 cm	0.037
Polluted covering- smooth	0.025
Polluted covering- sandy	0.040
Mud	0.037÷0.150
Sand- Gravel	0.060÷0.150
Sand- loose	0.160÷0.300

### 3. Grade resistance: GR, lbs [daN]

$$GR = G \times (\sin \alpha + \rho \times \cos \alpha)$$

$\alpha$  - gradient negotiation angle (Table 2)

Table 2

Grade %	$\alpha$ Degrees	Grade %	$\alpha$ Degrees
1%	0° 35'	12%	6° 5'
2%	1° 9'	15%	8° 31'
5%	2° 51'	20%	11° 19'
6%	3° 26'	25%	14° 3'
8%	4° 35'	32%	18°
10%	5° 43'	60%	31°

### 4. Acceleration force: FA, lbs [daN]

Force FA necessary for acceleration from 0 to maximum speed  $v$  and time  $t$  can be calculated with a formula:

$$FA = \frac{v_{ml} \times G}{22 \times t}, [\text{lbs}]; \quad FA = \frac{v_{km} \times G}{36 \times t}, [\text{daN}]$$

FA - acceleration force, lbs [daN];  
 $t$  - time, [s].

### 5. Tractive effort: DP, lbs [daN]

Tractive effort DP is the additional force of trailer. This value will be established as follows:

- acc.to constructor's assessment;
- as calculating forces in items 2, 3 and 4 of trailer; the calculated sum corresponds to the tractive effort requested.

### 6. Total tractive effort: TE, lbs [daN]

Total tractive effort TE is total effort necessary for vehicle motion; that the sum of forces calculated in items from 2 to 5 and increased with 10 % because of air resistance.

$$TE = 1,1 \times (RR + GR + FA + DP)$$

RR - force acquired to overcome the rolling resistance;

GR - force acquired to slope upwards;

FA - force acquired to accelerate (acceleration force);

DP - additional tractive effort (trailer).

### 7. Motor Torque moment: M, lb-in [daNm]

Necessary torque moment for every hydraulic motor:

$$M = \frac{TE \times R_{in}[R_m]}{N \times i \times \eta_M}$$

N - motor numbers;

$\eta_M$  - mechanical gear efficiency (if it is available).

### 8. Cohesion between tire and road covering: $M_w$ , lb-in [daNm]

$$M_w = \frac{G_w \times f \times R_{in}[R_m]}{i \times \eta_M}$$

To avoid wheel slipping, the following condition should be observed  $M_w > M$

f - frictional factor;


$G_w$  - total weight over the wheels, lbs [daN].

Table 3

Surface	Frictional factor f
Steel on steel	0.15 ÷ 0.20
Rubber tire on polluted surface	0.5 ÷ 0.7
Rubber tire on asphalt	0.8 ÷ 1.0
Rubber tire on concrete	0.8 ÷ 1.0
Rubber tire on grass	0.4

### 9. Radial motor loading: $P_{rad}$ , lbs [daN]

When motor is used for vehicle motion with wheels mounted directly on motor shaft, the total radial loading of motor shaft  $P_{rad}$  is a sum of motion force and weight force acting on one wheel.



$G_w$  - Weight held by wheel;

$P_{rad}$  - Total radial loading of motor shaft;



$M/R$  - Motion force.

$$P_{rad} = \sqrt{G_w^2 + \left(\frac{M}{R}\right)^2}$$

In accordance with calculated loadings the suitable motor from the catalogue is selected.

## DRAINAGE SPACE AND DRAINAGE PRESSURE

Advantages in oil drainage from drain space: Cleaning; Cooling and Seal lifetime prolonging.

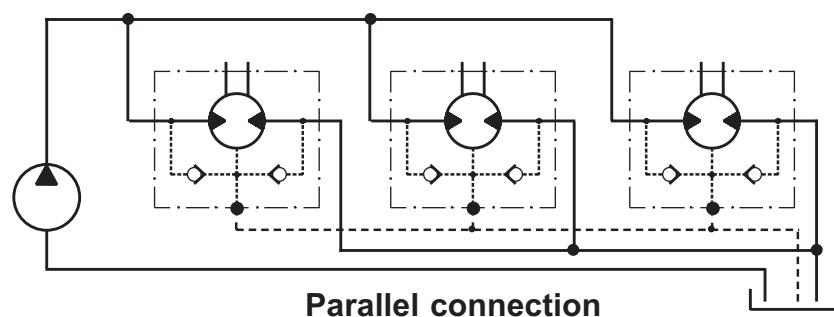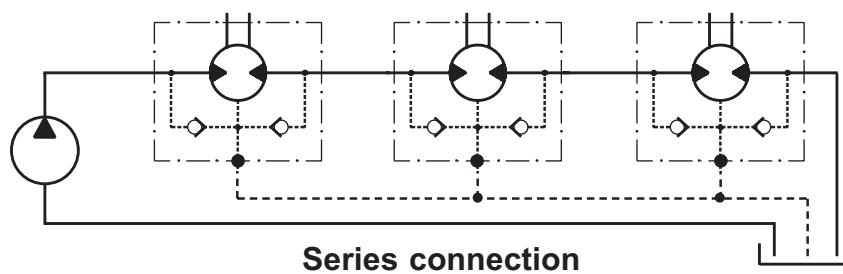

# **WARRANTY**

M+S Hydraulic warrants, that its products, supplied directly to original equipment manufacturer, authorized distributor or other customer, will be free of defects in material or workmanship at the time of shipment from M+S Hydraulic and will conform to the products technical documentation (drawings and specifications) under sale agreement with Buyer.

This warranty will apply only to defects appearing within applicable Warranty period, mentioned below. If Buyer notifies M+S Hydraulic within the Warranty period about any such defects, M+S, at its sole option will replace or repair the defective products or their parts found by M+S Hydraulic to be defective in material or workmanship.

THE FOREGOING LIMITED WARRANTY IS AVAILABLE ONLY IF "M+S HYDRAULIC" IS PROMPTLY NOTIFIED IN WRITTEN OF THE ALLEGED DEFECT AND DOES NOT COVER FAILURE TO FUNCTION CAUSED BY DAMAGE TO THE PRODUCT, IMPROPER INSTALLATION, UNREASONABLE USE OR ABUSE OF THE PRODUCT, FAILURE TO PROVIDE OR USE OF IMPROPER MAINTENANCE OR USUAL, DEGRADATION OF THE PRODUCT DUE TO PHYSICAL ENVIRONMENTS OF AN USUAL NATURE. THE FOREGOING REMEDIES ARE THE SOLE AND EXCLUSIVE REMEDIES AVAILABLE TO CUSTOMER. To facilitate the inspection, M+S Hydraulic may require return of the product/part, which Buyer claims to be defective.

M+S Hydraulic shall not be liable for labor costs or any other expenses incurred during the disassembling or reinstalling of the product/part.

In case the claimed products are returned to M+S Hydraulic in bad condition: dirty, disassembled, with damaged or missing parts during transportation, the warranty will be considered as not applicable and the products will not be liable to repair.

## **Warranty periods**

**New products:** The Warranty period is limited to 24 consecutive months (2 years) from the date of production of the product.

**Repaired products:** If the product is repaired in M+S Hydraulic during its warranty period, the warranty period of the repaired item shall continue for the balance of original Warranty period or for a period equal to 50% of the original new product Warranty period, whichever is later.

**Spare parts:** The Warranty period for Spare parts is 12 consecutive months (1 year) from the dispatch date of such parts from M+S Hydraulic.

**LIMITATION OF LIABILITY** M+S Hydraulic's liability for claim of any kind, for loss or damage arising out of, connected with or resulting from an order, or from the performance or branch thereof, or from the design, manufacture, sale delivery, operation or use of any of its products shall be limited to, at M+S 's sole option, replacement, repair of any defective product or the issuance of a credit to Customer against any future purchases. Cash refunds will not be made under any circumstances and Customer will not be entitled to recover any damages of any kind against M+S Hydraulic, including but not limited to incidental or consequential damages, whether direct or indirect, known or unknown, foreseen or unforeseen.

